


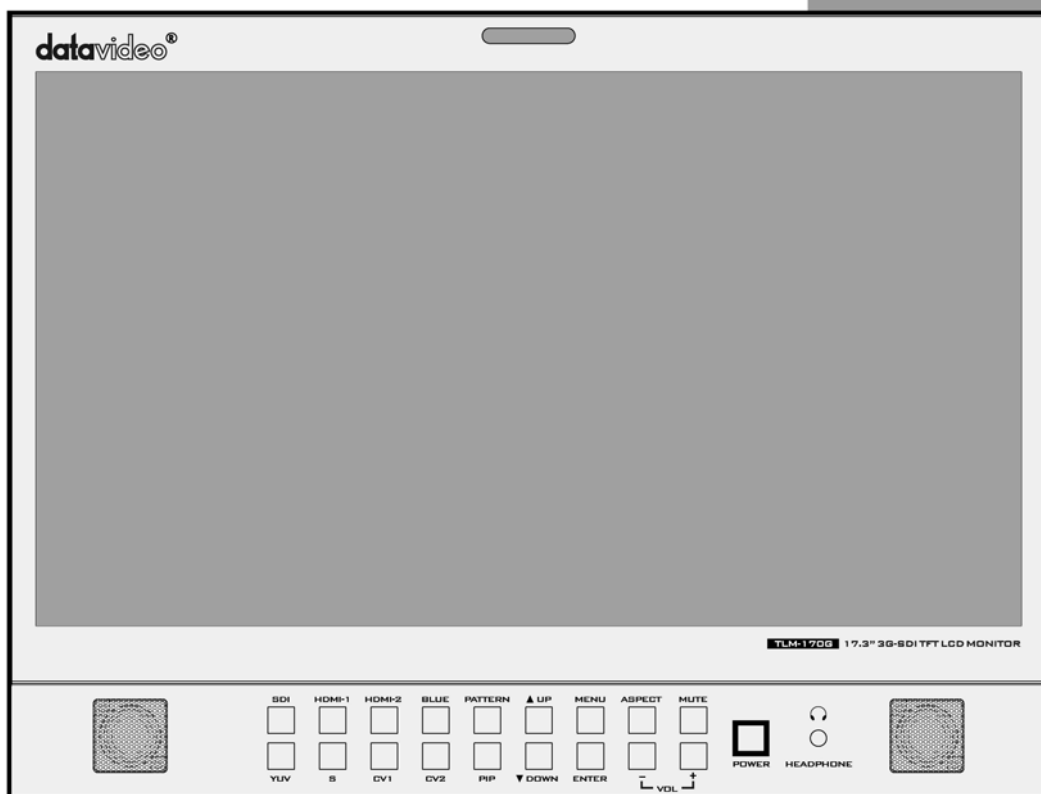

17.3" 3G-SDI TFT LCD MONITOR TLM-170G Quick Start Guide

www.datavideo.com

Warranty

Standard Warranty

Datavideo equipment is guaranteed against any manufacturing defects for one year from the date of purchase. The original purchase invoice or other documentary evidence should be supplied at the time of any request for repair under warranty.

Damage caused by accident, misuse, unauthorized repairs, sand, grit or water is not covered by this warranty.

All mail or transportation costs including insurance are at the expense of the owner.

All other claims of any nature are not covered.

Cables & batteries are not covered under warranty.

Warranty only valid within the country or region of purchase.

Your statutory rights are not affected.

Two Year Warranty

All Datavideo products purchased after 01-Oct.-2008 qualify for a free one year extension to the standard Warranty, providing the product is registered with Datavideo within 30 days of purchase. For information on how to register please visit www.datavideo-tek.com or contact your local Datavideo office or authorized Distributors

Certain parts with limited lifetime expectancy such as LCD Panels, DVD Drives, Hard Drives are only covered for the first 10,000 hours, or 1 year (whichever comes first).

Any second year warranty claims must be made to your local Datavideo office or one of its authorized Distributors before the extended warranty expires.

Disposal

For EU Customers only - WEEE Marking.



This symbol on the product indicates that it will not be treated as household waste. It must be handed over to the applicable take-back scheme for the recycling of electrical and electronic equipment. For more detailed information about the recycling of this product, please contact your local Datavideo office.

TLM-170G Model Types

Model	TLM-170G	TLM-170GR	TLM-170GM
Image			
System	Desktop	7U rack mount	1U mobile tray rack mount


Packing List

1 x Accessory Note

1 x TLM-170G

1 x TLM-170G Series Instruction Manual

Front Panel

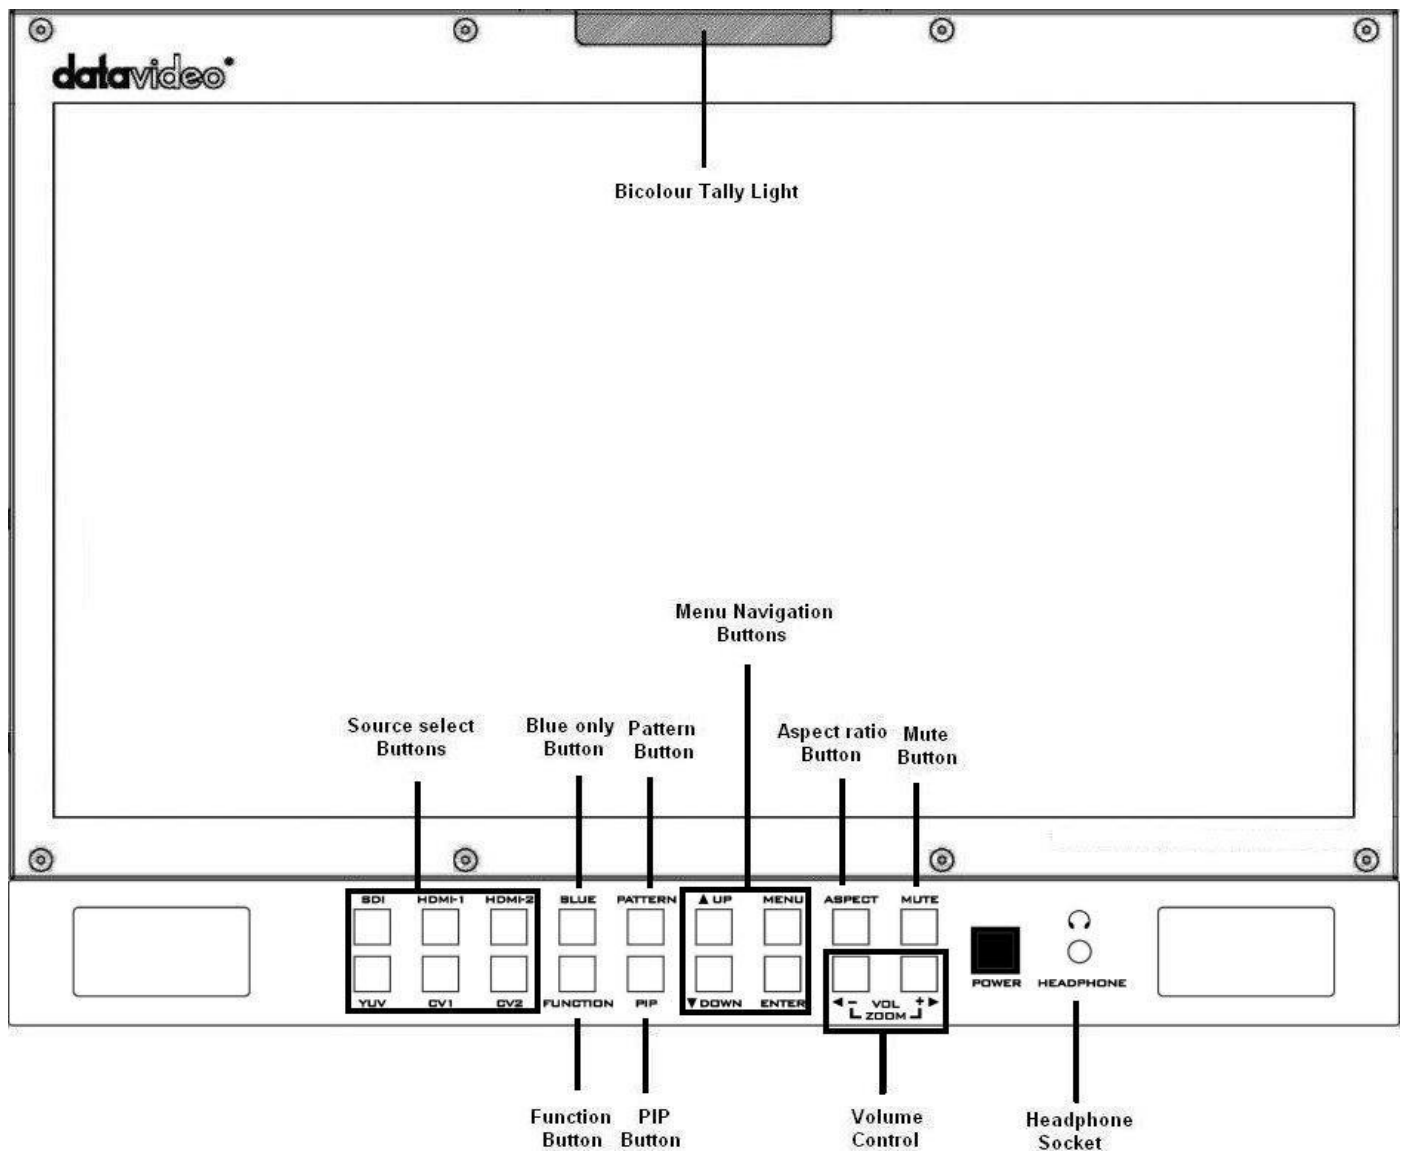

Bi-Colour Tally Light: To indicate Live (Red) or Cued (Amber) source.

Source Select Buttons: Select SDI, HDMI, YUV or CV; The active input will be indicated by a red LED on the Source Button.

BLUE: Blue only: remove the red and green component of input signals. This allows adjustments of chroma and phase. (Phase adjustment is effective with NTSC signals).

Function: Zoom the SDI-HD video source

* See **Pixel ZOOM** for more details.

Pattern Button: Display SMPTE 75% Colour Bars

PIP Button: Activates Picture in Picture Mode

Menu Navigation Buttons: Display and navigate set up menus - See *Menu Options* for more details.

Aspect Ratio Button: Sets the Aspect Ratio to 16:9 / 4:3

Mute Button: Mutes the audio from the internal speakers or headphone socket.

Volume Control: Adjusts the speaker / headphone volume up / down.

Headphone Socket: 3.5mm headphone socket; internal speaker circuit will automatically mute when headphones are connected.

N.B. Main Power On/Off switch is located on the rear of the TLM-170G.

Pixel ZOOM


This function magnifies the incoming source to fill the screen. This is strictly a zooming function and does not alter the native aspect ratio of the source to fill the screen. When viewing a 4:3 source in Zoom mode on a 16:9 display the aspect ratio of the visible video will remain 4:3 though the entire 16:9 screen will be filled.

** ZOOM must be HD mode (above 720P resolution) can be active. If the source is not HD, Zoom cannot work.*

Feature Navigator

Once assigned to a **FUNCTION** button this feature allows you to toggle the Pixel Zoom feature on/off in OSD. When turned on this feature generates a positionable and resizable rectangle on screen. The rectangle may be moved left or right using the **VOL + /- ZOOM** key and up or down using the up/down key. The **FUNCTION** key may be used to change the size of the onscreen rectangle. Using these adjust keys you can select any area on screen and then press down on the **ENTER** key to zoom to the selected area. This pixel zoom feature is designed to work with any HD / **SD** signal. A Flashing Tally light or **FUNCTION key's light** will be activated on your monitor whenever you are in a zoomed mode. To exit the mode simply press down on the MENU key once more. To exit the Pixel Zoom feature entirely simply press the MENU button assigned to this feature once more.

Rear Panel

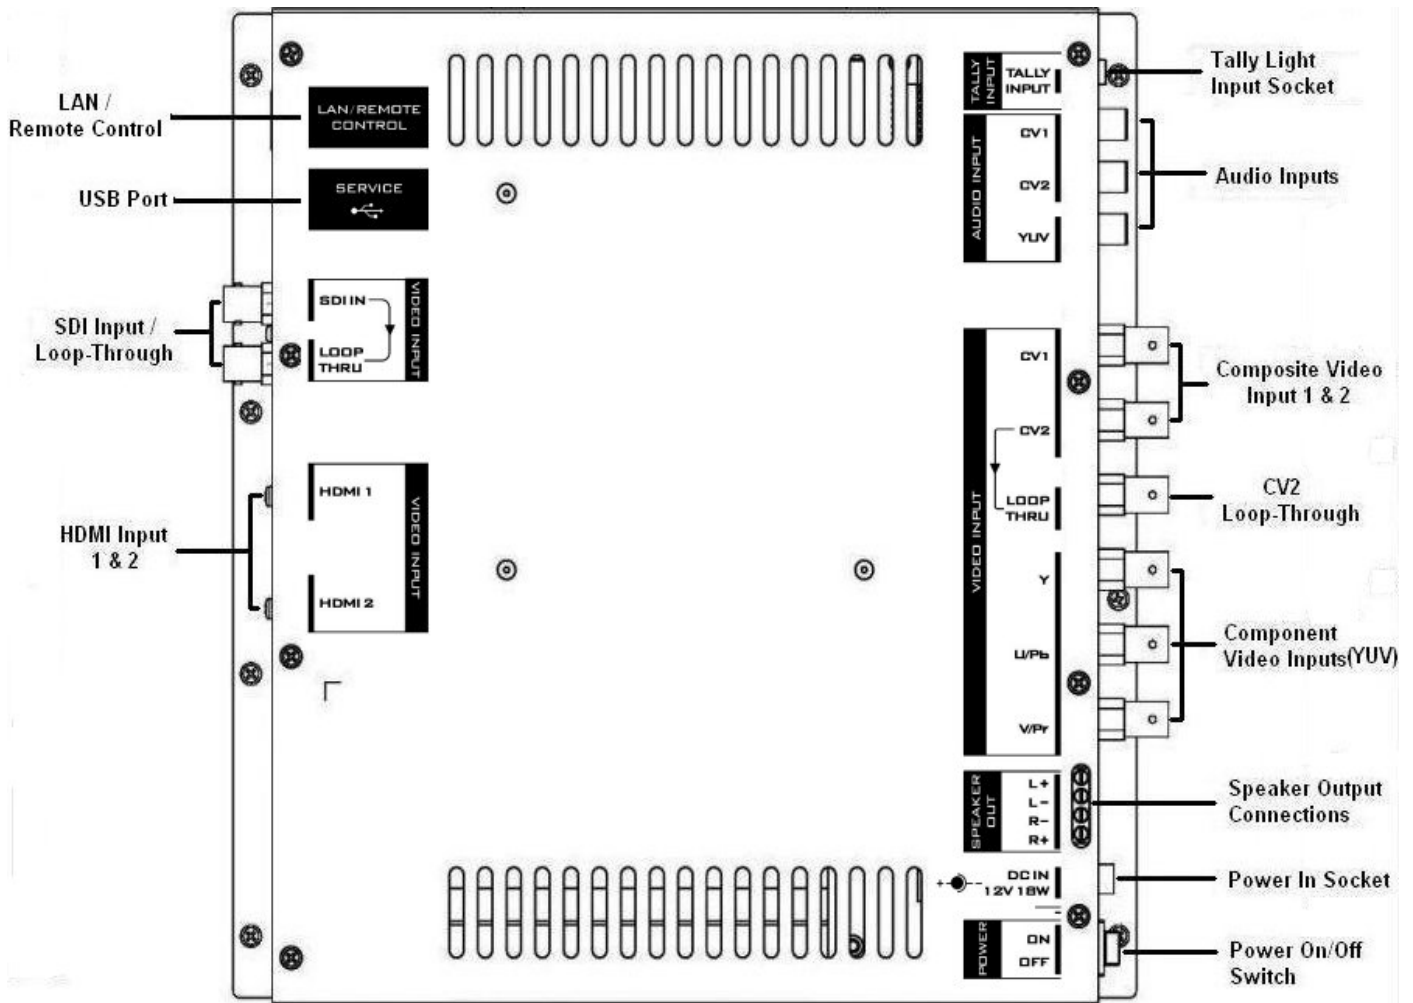

LAN Remote Control: Use a crossover Ethernet cable for direct connection between TLM-170G and the PC RJ-45 port.

USB Port: For firmware updates only. See Firmware Update section for more details. See **Firmware Update** for more details.

SDI Input & Loop Through: BNC Input for HD / SD SDI with a loop through output.

HDMI Input - Video and Audio input from HDMI.

3.5mm Tally Light Input: Tally light information can be supplied to the TLM-170G from the Datavideo RMC-140, TB-5 or TB-10 via this socket.

Analog Audio Inputs: Mono audio inputs to correspond to the analog video inputs (CV 1 & CV 2).

Composite Video Inputs 1 & 2: BNC connectors for composite video with one loop through output.


Component Video Input: BNC connectors for Component (YUV (Y/R-Y/B-Y)) Video.

Speaker Output Connections: Speaker Output connections Max 5v p - p (2w)

DC In Socket: 2.1mm In Line Power Socket with screw lock, for connecting the suitable 12v 18W feed.

On / Off Switch: Main on / off switch, switches the TLM-170G on and off.

Menu Options



The TLM-170G is set up via on screen menus. To display the on screen menu press the MENU button.

The menus are navigated using the Up / Down buttons.

Press Enter button to into or exit the setting mode.

MAIN ADJUST

You can choose:	BRIGHTNESS	0~100
	CONTRAST	0~100
	SHARPNESS	0~100
	SATURATION	0~100
	TINT	0~100
	BACK LIGHT	0~100
	3D COMB	DISABLE / ENABLE
	NR	HIGH / MID / LOW / OFF
	MPEG NR	HIGH / LOW / OFF
	DLC	DISABLE / ENABLE
	VOLUME	0~100
	EXIT	

3D COMB is for video noise suppression.

NR is for video noise reduction.

MPEG NR is for MPEG format noise reduction.

DLC is for Dynamic luminance control

COLOR ADJUST

You can choose:	6500	RED
		GREEN
		BLUE
		EXIT
	9300	RED
		GREEN
		BLUE
		EXIT
	7500	RED
		GREEN
		BLUE
		EXIT
	USER COLOR	RED
		GREEN
		BLUE
		EXIT

SCAN SETTING

You can choose:	UNDER SCAN
	OVER SCAN

INFORMATION

Display:	H. FREQUENCY
	V. FREQUENCY
	RESOLUTION

This mode will display the video resolution.

PIP SETTING

You can choose:	PIP	PIP / OFF SOURE POSITION SIZE SWAP	YUV / CVBS 1 / CVBSI 2 LF-TOP / RT-TOP / RT-BOT / LF-BOT LARGE / SMALL / MID
	EXIT		

LANGUAGE

You can choose:	English Español Deutsch Español Italiano Dutch Português Russian EXIT
-----------------	---

SETUP MENU

You can choose:	OSD TIMEOUT	5~120 sec
	EXIT	

SPECIAL FUNCTION I

You can choose:	FRAME RATIO	80 / 90 / OFF
	4:3 MARK LINE	ON / OFF
	CENTRAL MARK	ON / OFF
	CINEMA ZONE MARK	ON / OFF
	MARK TYPE	OVERLAY / TRANSPARENT
	EXIT	

SPECIAL FUNCTION II

You can choose:	TIMECODE SETUP (VALID FOR SDI ONLY)	
	TITLE EDIT	TITLE DISPLAY TITLE POSITION FONT SIZE FONT COLOR EDIT TITLE
		ON / OFF MID-TOP / MID-BOT SMALL / LARGE RED / GREEN / ORANGE / WHITE A~Z
	EXIT	

SETUP NETWORK

You can choose:	DHCP	ON / OFF	User choice
	IP	127.127.127.127.	User defined/ set by DHCP if DHCP=ON
	MASK	255.255.255.255.	User defined/ set by DHCP if DHCP=ON
	GATEWAY	127.127.127.127	User defined/ set by DHCP if DHCP=ON
	MAC	xx.xx.xx.xx.xx.xx	unique to monitor cannot be changed
	EXIT		

See **Remote Control Setup** for more details.

UPDATE F.W.

You can choose: UPDATE SCALER F.W.
SCALER VER:
UPDATE FPGA F.W.
FPGA VER:
EXIT

FACTORY RESET

You can push ENTER button for reset the TLM-170G to factory setting.

AUDIO CONTROL

You can choose:	INTERNAL AUDIO	ON / MUTE CONTROL / OFF
	EXTERNAL AUDIO	ON / MUTE CONTROL
	AUDIO INDICATOR	ON / OFF
	AUDIO CHANNEL L	1
	AUDIO CHANNEL R	2
	EXIT	

About USB dongle to upload new Firmware, we suggest 4 kinds USB dongle, Please select below models to do FW upgrade by USB.

- a. Sony 8G (Micro Vault USB flash drive)
- b. SanDisk 8G (Cruzer Glide USB flash drive)
- c. Transcend (Jet Flash16G)
- d. Kingston (DT101 G2 8GB)

Above all items all pass the test on USB download of TLM-170G.

Firmware update procedure

From time to time Datavideo may release new firmware to either add new features or to fix reported bugs in the current TLM-170P firmware. Customers can update the firmware themselves if they wish or they can contact their local dealer or reseller for assistance should they prefer this method.

This page describes the firmware update process and it should take ***approximately 15 minutes total time to complete.***

As well as a working TLM-170P you will need:

- The latest firmware update for the TLM-170P monitor.
This firmware file can be obtained from your local Datavideo office or dealer.
- USB 2.0 pen drive 128MB or larger with a USB A connector.

Once started ***the update process should not be interrupted in any way*** as this could result in a non-responsive unit.

How to update the Scaler firmware

1. Unzip / extract the supplied zipped archive or rar folder.
2. Wipe the contents of the USB 2.0 pen drive so it is empty.
3. Transfer / copy the unzipped / extracted file to the USB 2.0 pen drive.
4. Plug the USB 2.0 pen drive into the USB 2.0 port labelled MAINTENANCE on the rear of the TLM-170P monitor.
5. Power the monitor on and press the MENU button to display the OSD Main Menu.
6. Using the OSD Menu buttons [UP, DOWN & ENTER] highlight and select the SETUP F.W. option.
7. Using the OSD Menu buttons [UP, DOWN & ENTER] highlight and select UPDATE SCALER F.W.
8. The TLM-170P tally light will flash different colours whilst the update is in progress.
9. The TLM-170P monitor will reboot itself at the end of the process.

How to update the FPGA firmware

1. Unzip / extract the supplied zipped archive or rar folder.
2. Wipe the contents of the USB 2.0 pen drive so it is empty.
3. Transfer / copy the unzipped / extracted file to the USB 2.0 pen drive.
4. Plug the USB 2.0 pen drive into the USB 2.0 port labelled MAINTENANCE on the rear of the TLM-170P monitor.
5. Power the monitor on and press the MENU button to display the OSD Main Menu.
6. Using the OSD Menu buttons [UP, DOWN & ENTER] highlight and select the SETUP F.W. option.
7. Using the OSD Menu buttons [UP, DOWN & ENTER] highlight and select UPDATE FPGA F.W.
8. The TLM-170P tally light will flash different colours whilst the update is in progress.
9. The TLM-170P monitor will reboot itself at the end of the process.

Once started ***the update process should not be interrupted in any way*** as this could result in a non-responsive unit.

Remote Control Setup

1. Use network cable line to connect TLM-170G and Router (has DHCP function).
2. Press TLM-170G MENU button, and then using the Up / Down buttons select SETUP NETWORK
3. Set TLM-170G:
DHCP set "ON"
4. Set PC:
IP: 192.168.1.1
Mask: 255.255.255.0
Gateway: 192.168.1.1
5. Open IE Browser, and then key in the IP address <http://192.168.1.2>

Another setting way:

1. Use network line(crossover) to connect TLM-170G and PC RJ-45 port.
2. Press TLM-170G MENU button, and then using the UP / DOWN buttons select SETUP NETWORK
3. Set TLM-170G:
DHCP set "OFF"
IP:192.168.1.2
Mask:255.255.255.0
Gateway: 192.168.1.1
4. Set PC:
IP: 192.168.1.1
Mask: 255.255.255.0
Gateway: 192.168.1.1
5. Open IE Browser, and then key in the IP address <http://192.168.1.2>, wait a moment the IE will display as below:

datavideo® AV Setting | PIP | MarkLine | NetWork

Image Setting

Main Adjust

Brightness	100	+	-
Contrast	92	+	-
Sharpness	17	+	-
Saturation	21	+	-

Color Temperature

☐ 6500K ☒ 7500K ☐ 9300K

☐ User Define

Audio Setting

Volume Control: 5 + -

Internal Audio: ☒ ON ☐ OFF

External Audio: ☒ ON ☐ OFF

Indicator: ☐ ON ☒ OFF

Audio Channel Select (SDI Only)

Left : ☒ 1 ☐ 2 ☐ 3 ☐ 4
☐ 5 ☐ 6 ☐ 7 ☐ 8

Right : ☐ 1 ☒ 2 ☐ 3 ☐ 4
☐ 5 ☐ 6 ☐ 7 ☐ 8

Power Control

Power Status: On

In this UI you can set "AV Setting", "PIP", "Mark Line" and "Net Work" on your PC.

Specifications

LCD	Panel Size: 17.3" Contrast: 650 Resolution: 1600 x 900 White Luminance: 220cd View Angle: Top:20 Bottom: 45 Left:45 Right:45
Video Input	HDMI x 2 (Ver 1.3) HD/SD SDI x 1 Component x 1(3 BNC) Composite x 2
Video Loop Thru Out	SDI Loop Thru x 1 Composite x 1
SDI Signal Format	SMPTE-425M-A/B - 1080p (60/59.94/50/30/25/24) 1080i (60/59.94/50) SMPTE-296M - 1080P(60/59.94/50) SMPTE-125M - 480I(59.94) ITU-R BT.656 - 576I(50)
Audio Input	Composite x 2 YUV x 1
Audio Output	Speaker cable output connections (L-, L+, R-, R+) Max 5v p - p (2w) Speaker Output connections Max 5v p - p (2w)
Tally	Tally input x 1
Service	F/W Upgrade - USB 2.0 x 1
Network	Remote Control - LAN (RJ-45) x 1
Functions	Support SDI audio embedded Support HDMI audio embedded Audio Indicator: SDI / 8 CH HDMI / 2 CH CV/YUV 2CH Temperature Selection: 6500K,9300K,User define On Screen Time Code Safe Area Blue Only PIP Pixel Zoom up to 8x Under scan / Over scan selection

Service & Support

It is our goal to make your products ownership a satisfying experience. Our supporting staff is available to assist you in setting up and operating your system. Please refer to our web site www.datavideo.com for answers to common questions, support requests or contact your local office below.

Datavideo USA

Datavideo Corporation
7048 Elmer Avenue.
Whittier, CA 90602,
U.S.A.
Tel: +1-562-696 2324
Fax: +1-562-698 6930
E-mail: sales@datavideo.us

Datavideo The Netherland

Datavideo Technologies Europe BV
Floridadreef 106
3565 AM Utrecht,
The Netherlands
Tel: +31-30-261-96-56
Fax: +31-30-261-96-57
E-mail: info@datavideo.nl

Datavideo United Kingdom

Datavideo UK Limited
Units 1 & 2 Waterside Business Park
Hadfield, Glossop, Derbyshire
SK13 1BE, UK
Tel: +44-1457 851 000
Fax: +44-1457 850 964
E-mail: sales@datavideo.co.uk

Datavideo Taiwan

Datavideo Technologies Co. Ltd
10F. No. 176, Jian 1st Rd., Chung Ho
District, New Taipei City 235, Taiwan,
R.O.C.
Tel: +886-2-8227-2888
Fax: +886-2-8227-2777
E-mail: service@datavideo.com.tw

Datavideo China

Datavideo Technologies China Co
101, NO.618, LiuYing Rd, Zhabei District,
Shanghai, China
Tel: +86 21-5603 6599
Fax: +86 21-5603 6770
E-mail: service@datavideo.cn

Datavideo Singapore

Datavideo Technologies (S) PTE Ltd
No. 178 Paya Lebar Road #06-03
Singapore 409030
Tel: +65-6749 6866
Fax: +65-6749 3266
E-mail: sales@datavideo.sg

Datavideo Hong Kong

Datavideo Hong Kong Ltd
G/F., 26 Cross Lane
Wanchai, Hong Kong
Tel: +852-2833-1981
Fax: +852-2833-9916
E-mail: info@datavideo.com.hk

Datavideo France

Datavideo France s.a.r.l
Cité Descartes 1, rue Albert Einstein
Champs sur Marne
774477-Marne la Vallée cedex 2
Tel: +33-1-60370246
E-mail: info@datavideo.fr

Datavideo India

Datavideo Technologies India Pvt Ltd
A-132, Sec-63, Noida-201307,
Uttar Pradesh (UP), India.
Tel: +91-0120-2427337
Fax: +91-0120-2427338
E-mail: sales@datavideo.in



Please refer to our website for update the latest version manual.

www.datavideo.info/LCD+Monitors/TLM-170G

datavideo®
www.datavideo.com