

# Cosmobeam 800/1000W LUX with clamp and flexible arm

Code RC 80P/LUX • 100P/LUX ■ Black RC 80P/LUXB • 100P/LUXB

This 800/1000W open-face, tungsten-halogen lantern is a precious instrument for both studio applications and locations where powerful and long-distance illumination is needed but quick and easy to set up.

- In this version the housing is made die-cast magnesium, an extremely robust and lightweight alloy which prevents any breakages or denting. Particularly suitable for rentals and live shows where intensive use is required
- Thanks to its special design and treatments, the reflector offers an extremely powerful and bright light output for an exceptional even illumination
- The focusing mechanism for beam variation is smooth and accurate and allows precise light delivery exactly where needed
- The lamp contacts in pure 100% silver represent a unique feature of this lantern which extends the bulb and contacts life reducing maintenance costs
- Top quality switch with very high number of on/off cycles
- All main mechanical components are stainless steel
- The ever-lasting flexible arm allows great versatility and ease of installation
- A complete set of accessories is available to create effects and control the light



## ACCESSORIES



**RC 103C/R**  
Four-leaf barndoor with safety mesh and gel clips • gr 650



**RC 103C**  
Four-leaf barndoor with gel clips • gr 625



**RC 101**  
Accessory holder • gr 350



**RC 104**  
Dichroic filter • gr 170



**RC 105**  
Safety glass • gr 170



**RC 105A**  
Diffusion glass • gr 170



**RC 106**  
Scrim set (4 pieces) • gr 150



**RC 107**  
Safety mesh • gr 110 (excludes attachment of any other accessory)



**RC 50/55**  
Snoot diam. 55 mm • gr 200  
**RC 50/63**  
Snoot diam. 63 mm • gr 210



**RC 212B**  
Aluminium stand 76/264 cm • gr 1120 (as alternative RC 211B, RC 213B)



**RC 4320**  
Toggle joint with 2 sockets 16 mm • gr 250



**RC 4325**  
Umbrella diam. 80 cm • gr 340


## TECHNICAL DATA

- Die-cast magnesium housing
- High-temperature painting
- Sanded and treated aluminium reflector
- Spot/flood focusing through rear knob
- Clamp and flexible arm mounting
- Full lamp contacts in pure silver 100%
- 3,5 mt VDE fire resistant silicone cable, section 3x1,5 mm<sup>2</sup>
- In-line 10A switch protected by high-impact-proof housing
- Cable gland against tear
- Supply voltage 230-240V~
- Lamp base R7s
- Correlated color temperature 3200K
- IP 20
- CE compliant


**Weight** kg 1,500  
**Packing dimensions** 27 x 21 x h 17 cm



## TECHNICAL DRAWINGS

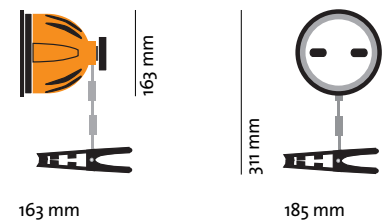

## PHOTOMETRIC DATA

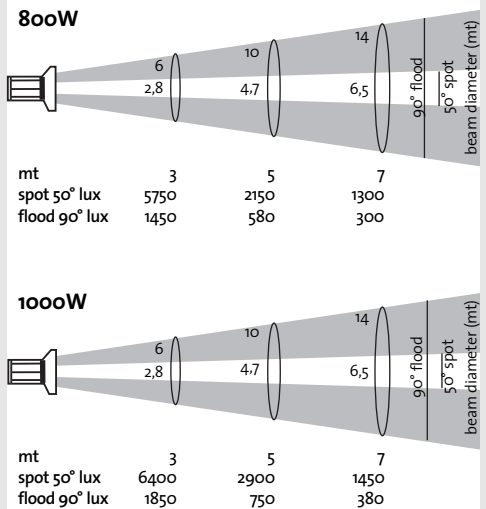

## LAMPS

BASE R7s • 3200K

MOD.	LENGTH	WATT	ANSI	LIF
RC 80		800-230V	DXX	P2/13
		800-240V	DXX	P2/13
		650-120V	FAD	
		also available: 600W-500W-250W		
RC 100		1000-230V		P2/35
		1000-240V		P2/35
		1000-120V	DXW	
		also available: 800W- 600W		

Note: receiving diameter of accessories 162 mm

