

HPRC2300 for Canon Eos R5 / R6

CR5-2300-01



- 1** Canon EOS R5 / R6 Mirrorless Digital Camera (with or without professional cage)
- 2** Lenses: Diameter Max 90mm x Length Max 220mm
- 3** Cable/Miscellaneous
- 4** LC-E6 Charger for LP-E6 Battery Pack
- 5** LP-E6NH Lithium-Ion Battery (7.2V, 2130mAh)



TECHNICAL FEATURES

Dimension:

Internal dimension
304x231x137(mm) - 11.97x9.09x5.39(in)
External dimension
335x289x155(mm) - 13.19x11.38x6.10(in)




Weight:

1,90kg - 4.19lbs

Temperature rating:

Minimum Maximum
-40°C -40°F +80°C +176°F

TECHNICAL DRAWING

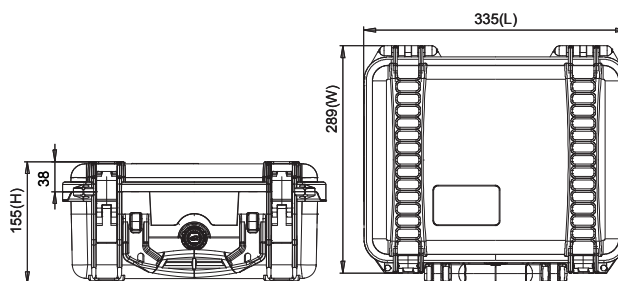

www.hprc.it
info@hprc.it

Plaber s.r.l. - HPRC cases
Via Div Tridentina, 10
I-36061 Bassano del Grappa
Vicenza - Italy
Tel +39 0424 809150

USA office and warehouse:
HPRC USA
110 Chestnut Ridge Rd. #314
Montvale, NJ 07645
Phone +1(201) 989-3353



APPROVALS
ATA 300
IP67
STANAG 4280
DS 81-41

TEST
DROP
IMPACT
HANDLE
WATERTIGHT INTEGRITY
UV COLOR AND MATERIAL
PROTECTION

