

# MR3STK/MR3SWTK Specifications

## System:

Freq. Range (-10 dB):  
140Hz-21kHz

Freq. Response (-3 dB):  
180Hz-19kHz

Horz. Coverage Angle (-6 dB):  
110°, averaged 800Hz-16kHz

Vert. Coverage Angle (-6 dB):  
110°, averaged 800Hz-16kHz

Directivity Factor Q (DI):  
8.5 (9.3), averaged 800Hz-16kHz

System Sensitivity <sup>1</sup>:  
89 dB, 1W@1m

Rated Maximum SPL:  
108 dB @ 1 m (3.3 ft) peak

Rated Nominal Impedance:  
4Ω (bypassed)

System Input Power Rating <sup>2</sup>:  
35W IEC, 140W Peak

Constant Voltage:  
25V, 50V, 70V, 100V

Power Taps:  
1W, 2.5W, 5W, 10W, 20W

Crossover Frequency:  
6.0kHz

## Transducers:

Low Frequency:  
4.75" (120 mm) carbon fiber woofer

High Frequency:  
0.5" (13 mm) titanium metalized  
dome tweeter, Ferrofluid cooled

## Physical:

Enclosure:  
45° back angles, high density  
polystyrene

Attachment Inserts:  
4 integrated threaded insert points

Color: Matte black (MR3STK)  
White (MR3SWT)

Grille: Matching perforated steel grille

Input Connectors:  
Spring-loaded terminal

Dimensions HxWxD:  
8.27 in x 5.91 in x 5.31 in  
(210 mm x 150 mm x 135 mm)

Net Weight:  
5.5 lb (2.5 kg)

## Options:

MA3-5 (MA3-5W):  
Articulated surface mount  
Black (White)

MA3-6 (MA3-6W):  
U-bracket  
Black (White)

**MACKIE®**  
INDUSTRIAL™

[www.mackieindustrial.com](http://www.mackieindustrial.com)

16220 Wood-Red Road NE, Woodinville, WA 98072 USA  
TEL 888.337.7404, FAX 425.487.4337, [industrial@mackie.com](mailto:industrial@mackie.com)  
UK +44.1268.571.212, FAX +44.1268.570.809 +[industrial@rcf-uk.com](mailto:industrial@rcf-uk.com)  
ITALY +39.0522.354.111, FAX +39.0522.926.208 +[industrial@rcf.it](mailto:industrial@rcf.it)  
FRANCE +33.3.8546.9160, FAX +33.3.8546.9161 +[rcf.commercial@wanadoo.fr](mailto:rcf.commercial@wanadoo.fr)  
GERMANY +49.2572.96042.0, FAX +49.2572.96042.10 +[industrial@mackie.de](mailto:industrial@mackie.de)

<sup>1</sup> Measured on-axis in the far field with 1 watt (2.00V RMS @ 4Ω ) input and referenced to 1 meter distance using the inverse square law. Listed sound pressure represents an average from 300Hz to 3kHz.

<sup>2</sup> IEC Spectrum, peak for 2 hours with +4.5 dB crest factor.


Part No. 910-178-20 Rev. B 4/01

© 2001 Mackie Industrial. All Rights Reserved. Printed in the USA.

# MACKIE® INDUSTRIAL™

# MONITOR MR3STK/SWTK Compact Coaxial Speaker

## Quick-Start Guide

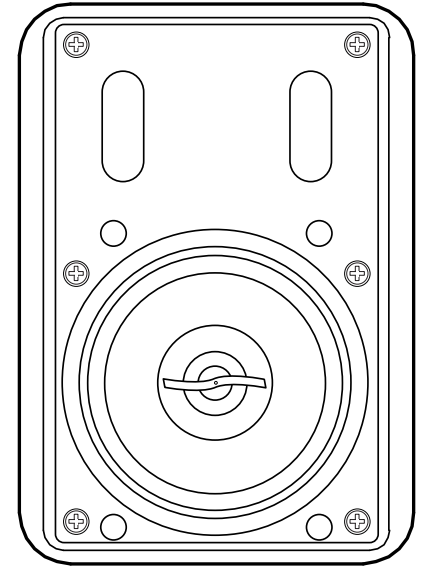

The MR3STK (Black) and MR3SWTK (White) are a compact two-way coaxial speaker system featuring a built-in multi-tap constant voltage transformer, with two detented rotary switches for selecting wattage taps (constant voltage) or 4Ω (constant impedance) operation. The 4.75" carbon fiber woofer, in combination with a coaxial 0.5" titanium metalized dome tweeter, provide natural, smooth sound reproduction, ideal for use in business music systems and indoor/outdoor background music applications.


The passive crossover is designed to reduce heat dissipation and optimize the power response of the loudspeaker. Connections are made to recessed, color-coded spring-loaded terminals.

The enclosure is constructed of high-density polystyrene, with integrated mounting points for use with the optional mounting hardware, and includes a protective perforated steel grille.

## Safety First!

Before connecting and using the equipment, please read this Quick-Start Guide carefully and keep it for future reference.

**WARNING!** This equipment has been designed to be installed by qualified professionals only! There are many factors to be considered when installing professional sound reinforcement systems, including mechanical and electrical considerations, as well as acoustic coverage and performance. Mackie Industrial strongly recommends that this equipment be installed only by a professional sound installer or contractor.

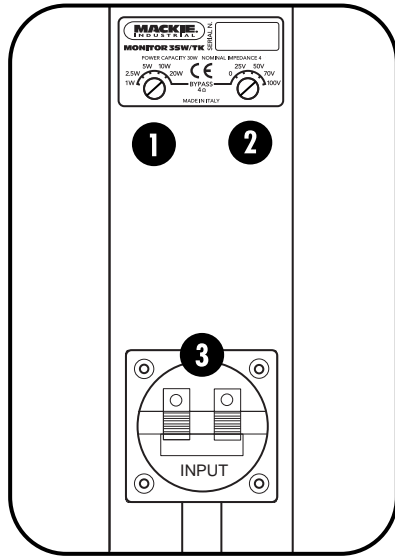


## Rear Panel Features and Controls


1. This rotary control selects the power tap for the internal constant voltage transformer. Choices are 1W, 2.5W, 5W, 10W, 20W, and BYPASS (used for 4Ω operation).
  2. This rotary control selects the constant voltage distributed system in which the speaker is used. Choices are BYPASS (used for 4Ω operation), 0(Off), 25V, 50V, 70V, and 100V.
- Note:** Use a slot-head screwdriver to adjust the rotary controls.
3. Use these spring-loaded terminals to connect the speaker wiring.

## Connections


The spring-loaded speaker terminals are designed to accept bare wire, up to a maximum of 18 gauge. Strip 1/4" of insulation off the end of the speaker wire, press in the tab, and insert the bare wire into the hole. When you release the tab, the wire is locked in place. Make sure there are no stray strands of wire outside the terminal connection.




## Hookup

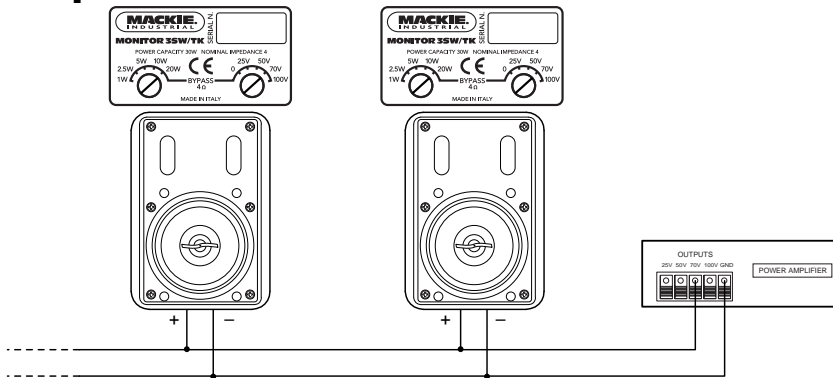

### 70V Connection

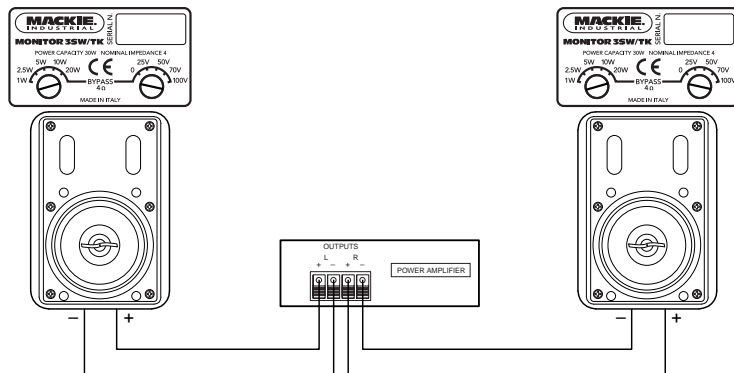

### 4 Ohm Stereo Connection

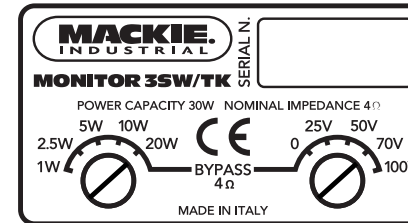

## Installation

The MONITOR MR3ST can be mounted using the optional mounting brackets. These include the following:

- MA3-5 Articulated surface mount
- MA3-6 U-bracket

**WARNING:** Consult a professional rigger or structural engineer prior to suspending loudspeakers from a structure not intended for that use. Always know the working load limit of the structure supporting the loudspeaker array. Always make sure that the rigging hardware minimum rating is at least five times the actual load.

