

The following parts information has been extracted from the service manual shown below:

SONY

PROFESSIONAL DISC CAMCORDER

PDW-700

HD/SD SDI INPUT BOARD
CBK-HD01

ANALOG COMPOSITE INPUT BOARD
CBK-SC02

XDCAM

MPEG HD422

Power HAD.FX



MAINTENANCE MANUAL

Volume 2 1st Edition (Revised 2)

Serial No. 10001 and Higher : PDW-700 (SY)

Serial No. 60001 and Higher : PDW-700 (CE)

For further information please visit : pro.sony.eu/manualinformation

Section 1

Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked △ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

3. Stock of Parts

Parts marked with “o” at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

1-1. 補修部品注意事項

1. 安全重要部品

△警告

△印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。これは部品の共通化、改良等によるものです。


3. 部品の在庫

部品表のSP (Supply code) 欄に “o” で示される部品は在庫していないことがあり、納期が長くなることがあります。


4. ハーネス

部品番号が記載されていないハーネスは、サービス部品として登録されていません。

1-2. Exploded Views

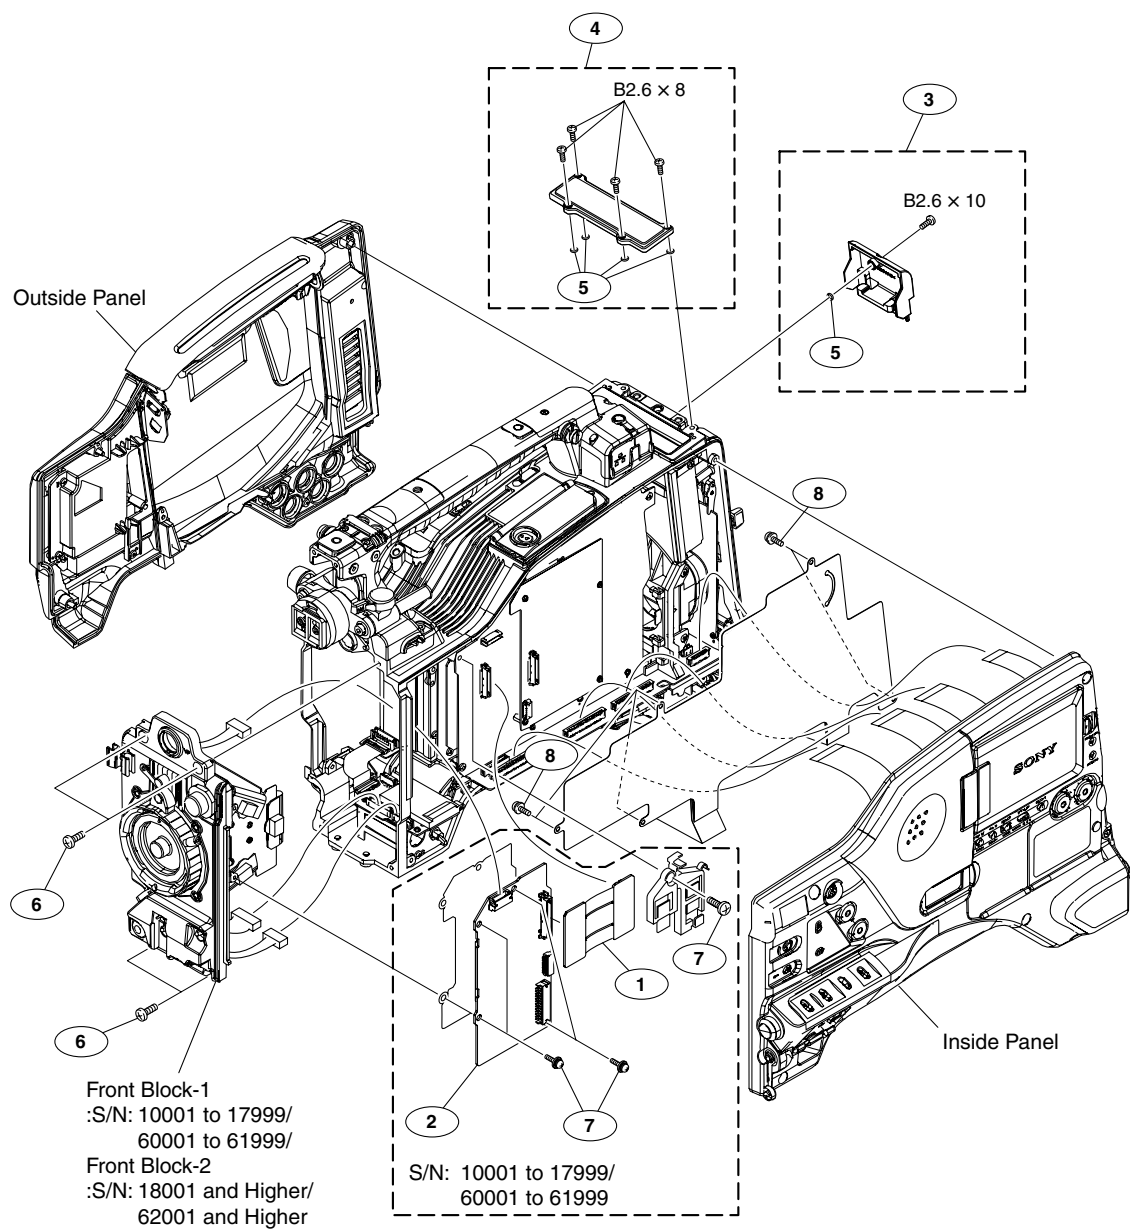


No.	Part No.	SP Description
1	A-1539-040-A	s MOUNTED CIRCUIT BOARD, CN-2947
2	A-1540-092-A	s MOUNTED CIRCUIT BOARD, TG-260
3	A-1541-506-A	s COVER ASSY, 50P
4	A-1541-534-A	s PLATE (WRR) ASSY, BLIND
5	3-742-004-01	s RING, NYLON
6	3-742-074-13	s SCREW (+B 3X8)
7	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
8	3-855-938-01	s SCREW
	7-621-775-40	s SCREW +B 2.6X8
	7-621-775-50	s SCREW +B 2.6X10

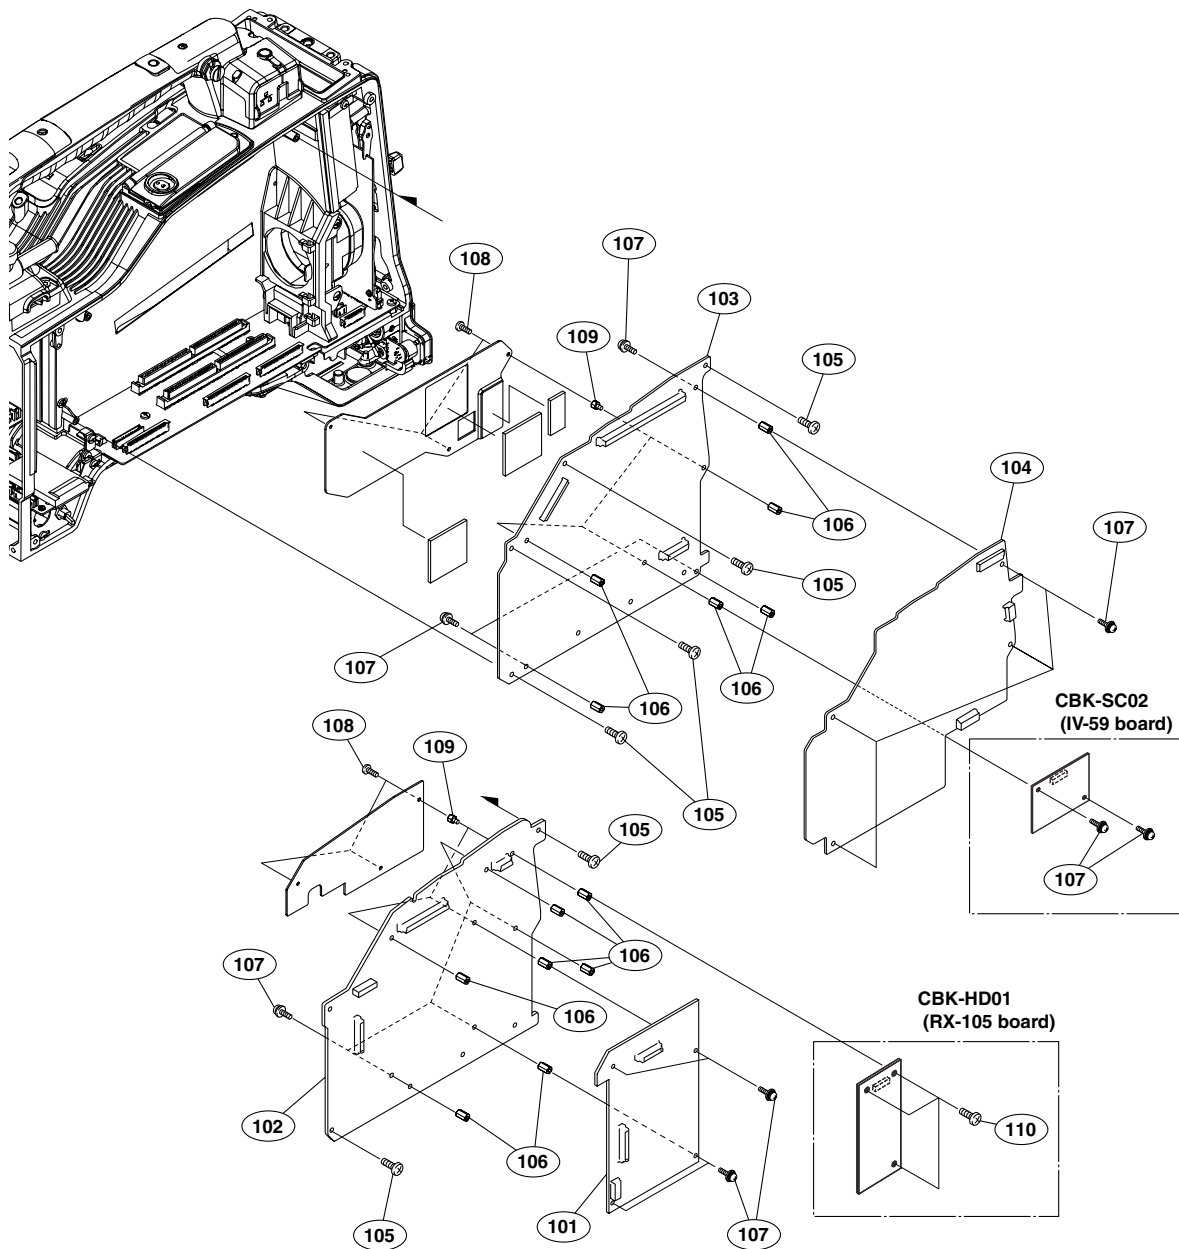


No.	Part No.	SP Description
101	A-1538-880-A	s MOUNTED CIRCUIT BOARD, AT-177
102	A-1538-883-A	s MOUNTED CIRCUIT BOARD, DCP-44
	A-1727-966-A	s MOUNTED CIRCUIT BOARD, DCP-49
103	A-1538-884-A	s MOUNTED CIRCUIT BOARD, DVP-45
104	A-1538-888-A	s MOUNTED CIRCUIT BOARD, SY-355
105	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
106	3-854-997-01	s SUPPORT (M2X7)
107	3-855-938-01	s SCREW
108	3-968-729-81	s SCREW (M2), LOCK ACE, P2
109	3-875-192-01	s SUPPORT HEATSINK
110	3-729-076-01	s SCREW (+B) (2X3)

Front Block -1

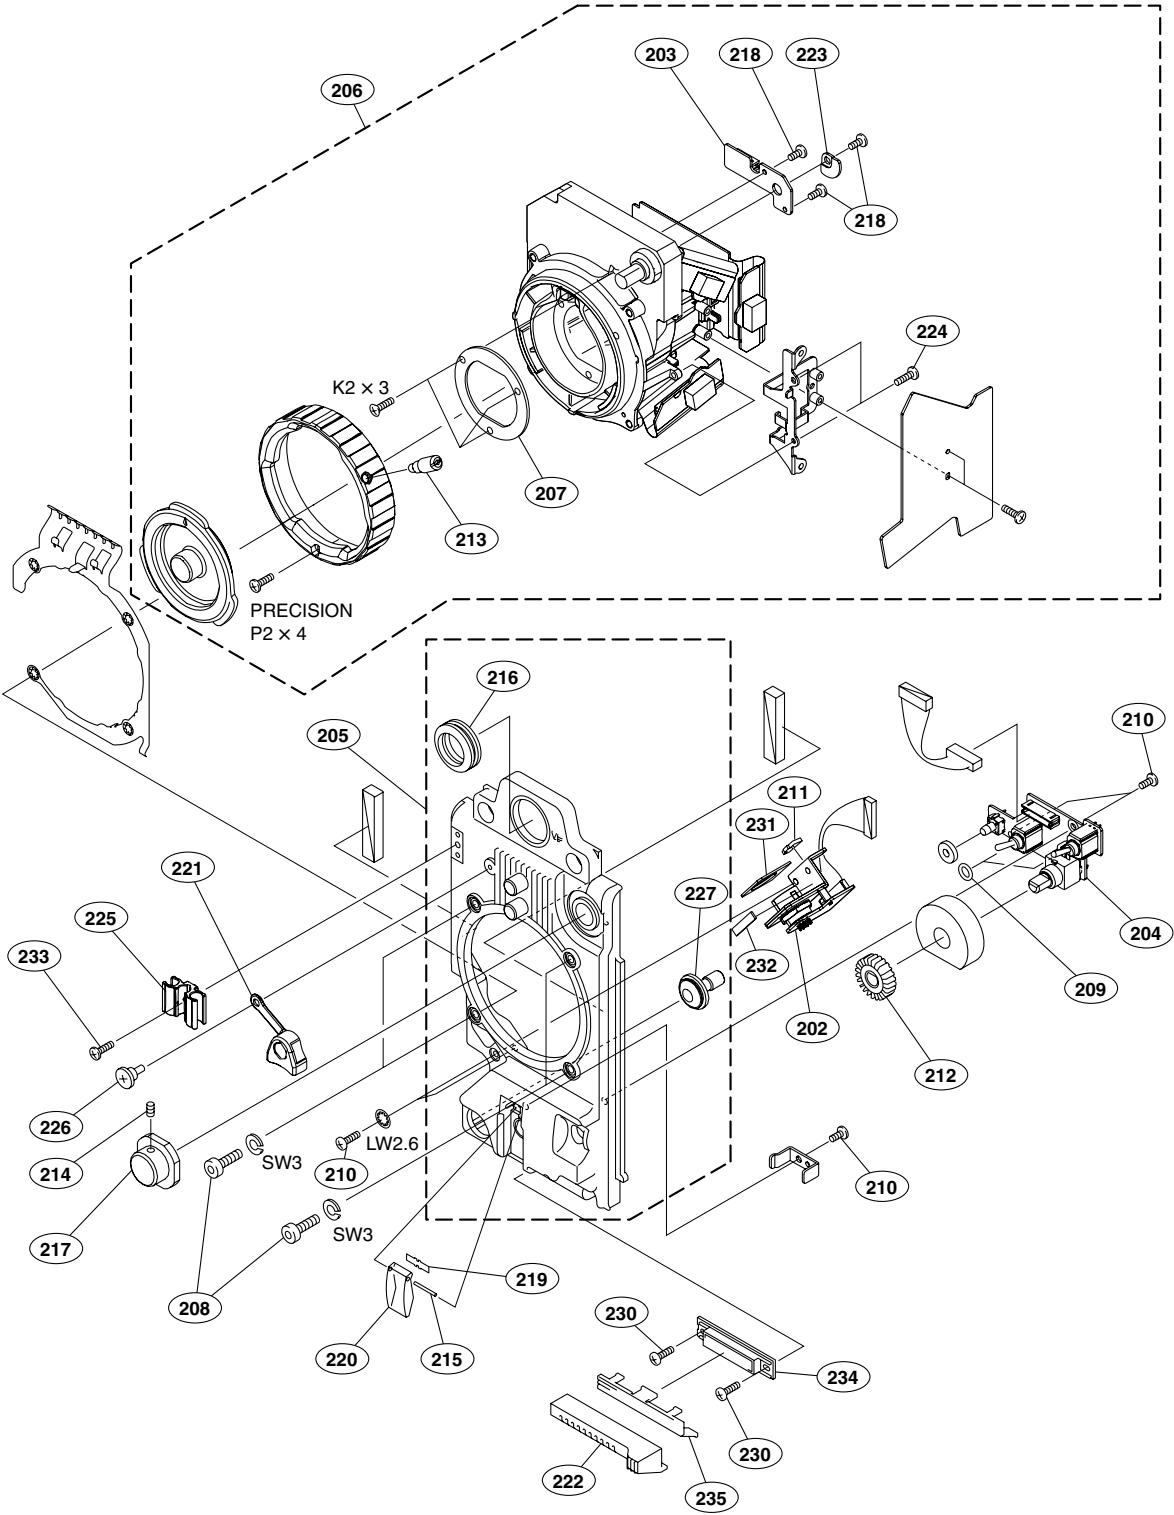


No.	Part No.	SP Description
202	A-1540-098-A	s MOUNTED CIRCUIT BOARD, CN-3025
203	A-1540-100-A	s MOUNTED CIRCUIT BOARD, SE-924
204	A-1540-980-A	s MOUNTED CIRCUIT BOARD, SW-1425
205	A-1541-529-A	s FRONT PANEL SUB ASSY
206	A-1557-163-A	s CCD BLOCK ASSY (RP)
207	1-788-765-11	s FILTER UNIT, OPTICAL
208	2-623-773-11	s BOLT (M3X8), STAINLESS
209	3-312-823-01	s PACKING, KNOB
210	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
211	3-383-699-01	s CLAMP (EDGE)
212	3-624-135-01	s KNOB,VR(AUDIO)
213	3-678-629-03	s LEVER, MOUNT
214	3-701-505-01	s SET SCREW, DOUBLE POINT 3X3
215	3-703-357-05	s PIN, PARALLEL (DIA. 1.6X8)
216	3-710-024-02	s PACKING, VF
217	3-710-054-01	s KNOB, FILTER
218	3-729-076-11	s SCREW (+B) (2X4)
219	3-742-066-11	o SPRING, SHUTTER
220	3-742-067-05	s LID, SHUTTER
221	3-796-982-02	s HOLDER LENS MOUNT
222	3-854-361-01	s GUARD VOLUME FRONT
223	3-854-378-01	s PLATE,FILTER ID
224	3-855-938-01	s SCREW
225	3-870-272-01	s CLAMP, CABLE
226	3-965-077-02	s SCREW, SPECIAL (M2)
227	3-986-632-01	s BUTTON,VTR START
230	4-654-273-02	s ACE (M2), LOCK
231	3-796-967-02	s CUSHION,DROP PROTECTION CONNEC
232	3-796-970-02	s CUSHION,DROP PROTECTION CONNEC
233	4-674-315-01	s SCREW (M2.6X6)
234	3-854-362-01	s HOLDER GUARD
235	3-854-363-01	s SLIDER
	7-623-208-22	s SW 3,TYPE 2
	7-623-307-07	s LW 2.6,TYPE (A)
	7-627-452-18	s SCREW,PRECISION +K 2X3

Front Block -2

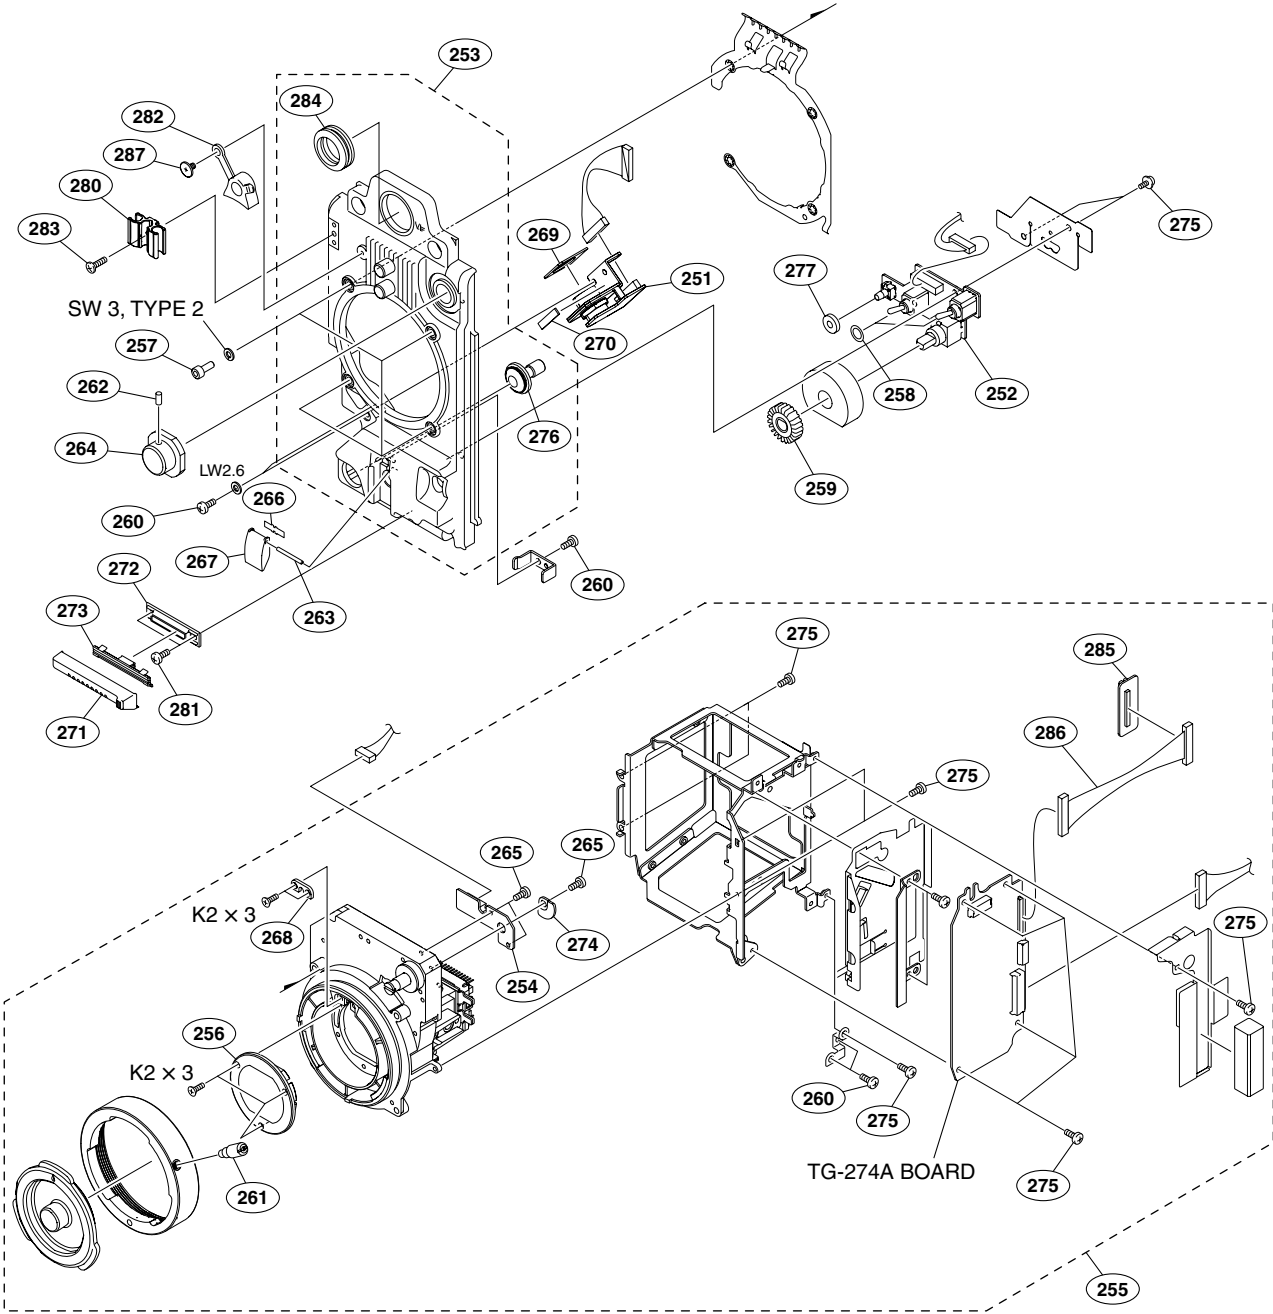


No.	Part No.	SP Description
251	A-1540-098-A	s MOUNTED CIRCUIT BOARD, CN-3025
252	A-1540-980-A	s MOUNTED CIRCUIT BOARD, SW-1425
253	A-1541-529-A	s FRONT PANEL SUB ASSY
254	A-1786-308-A	s MOUNTED CIRCUIT BOARD, SE-1029
255	A-1833-095-A	s CCD BLOCK ASSY (RP)
256	1-788-765-21	s FILTER UNIT, OPTICAL
257	2-623-773-11	s BOLT (M3X8), STAINLESS
258	3-312-823-01	s PACKING, KNOB
259	3-624-135-01	s KNOB, VR (AUDIO)
260	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
261	3-678-629-04	s LEVER, MOUNT
262	3-701-505-01	s SET SCREW, DOUBLE POINT 3X3
263	3-703-357-05	s PIN, PARALLEL (DIA. 1.6X8)
264	3-710-054-01	s KNOB, FILTER
265	3-729-076-11	s SCREW (+B) (2X4)
266	3-742-066-11	o SPRING, SHUTTER
267	3-742-067-06	s LID, SHUTTER
268	3-776-897-02	s GUIDE PLATE
269	3-796-967-02	s CUSHION, DROP PROTECTION CONNEC
270	3-796-970-02	s CUSHION, DROP PROTECTION CONNEC
271	3-854-361-01	s GUARD VOLUME FRONT
272	3-854-362-01	s HOLDER GUARD
273	3-854-363-01	s SLIDER
274	3-854-378-01	s PLATE, FILTER ID
275	3-855-938-01	s SCREW
276	3-986-632-02	s BUTTON, VTR START
277	3-990-897-01	s CUSHION REC (SW)
280	3-870-272-02	s CLAMP, CABLE
281	4-654-273-02	s ACE (M2), LOCK
282	3-796-982-03	s HOLDER LENS MOUNT
283	4-674-315-01	s SCREW (M2.6X6)
284	3-710-024-02	s PACKING, VF
285	A-1787-345-A	s MOUNTED CIRCUIT BOARD, EX-1173
286	1-967-533-11	s HARNESS (TG-DCP)
287	3-965-077-02	s SCREW, SPECIAL (M2)
7-623-208-22		s SW 3, TYPE 2
7-623-307-07		s LW 2.6, TYPE (A)
7-627-452-18		s SCREW, PRECISION +K 2X3

Outside Panel 1

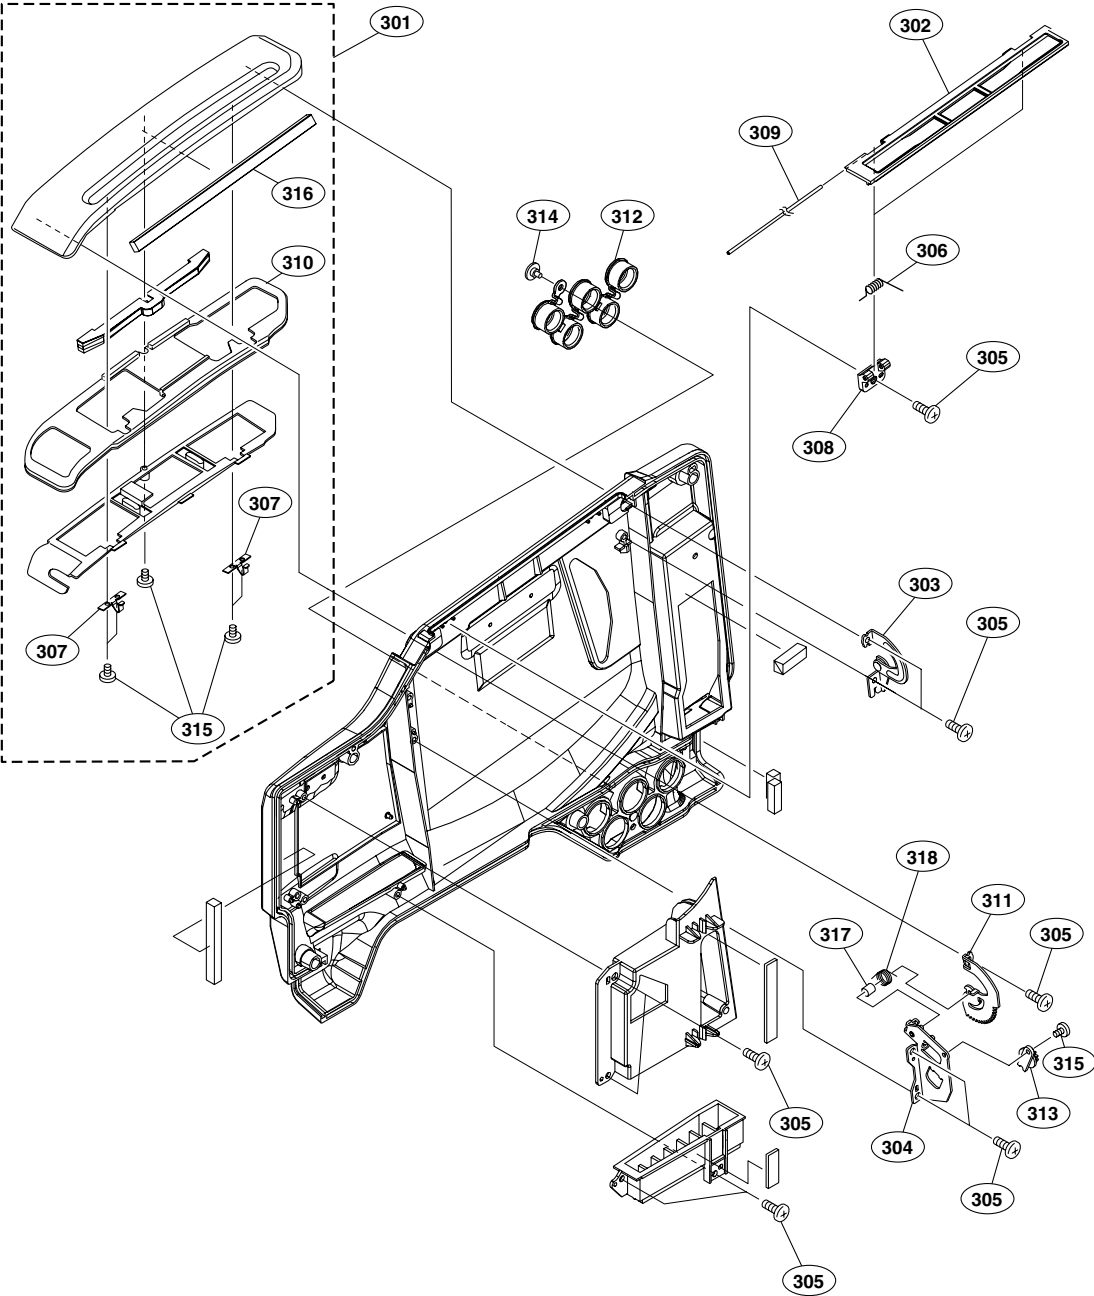

No.	Part No.	SP Description
301	A-1541-503-A	s LID ASSY, CARTRIDGE
302	X-3608-690-3	s ASSY, SHUTTER INNER
303	X-3698-568-4	s ARM(L) ASSY, LID
304	X-3698-570-3	s HOLDER(R) ASSY, ARM, LID
305	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
306	3-797-003-01	s SPRING 02, TORSION
307	3-797-004-03	s HOLDER, OUT LID
308	3-797-058-01	s HOLDER, SHUTTER, INNER
309	3-797-059-01	s SHAFT, SHUTTER, INNER
310	3-825-462-02	s PROTECTION, OUTER LID


No.	Part No.	SP Description
311	3-868-613-04	s (R) ARM, LID
312	3-870-160-01	s COVER (PH3), BNC
313	3-953-235-11	s DAMPER, OIL
314	3-965-077-02	s SCREW, SPECIAL (M2)
315	3-968-729-81	s SCREW (M2), LOCK ACE, P2
316	3-991-426-01	s ABSORBENT, ACOUSTIC
317	3-991-830-02	s COLLAR (2)
318	3-991-834-01	s (OPEN) SPRING TORSION

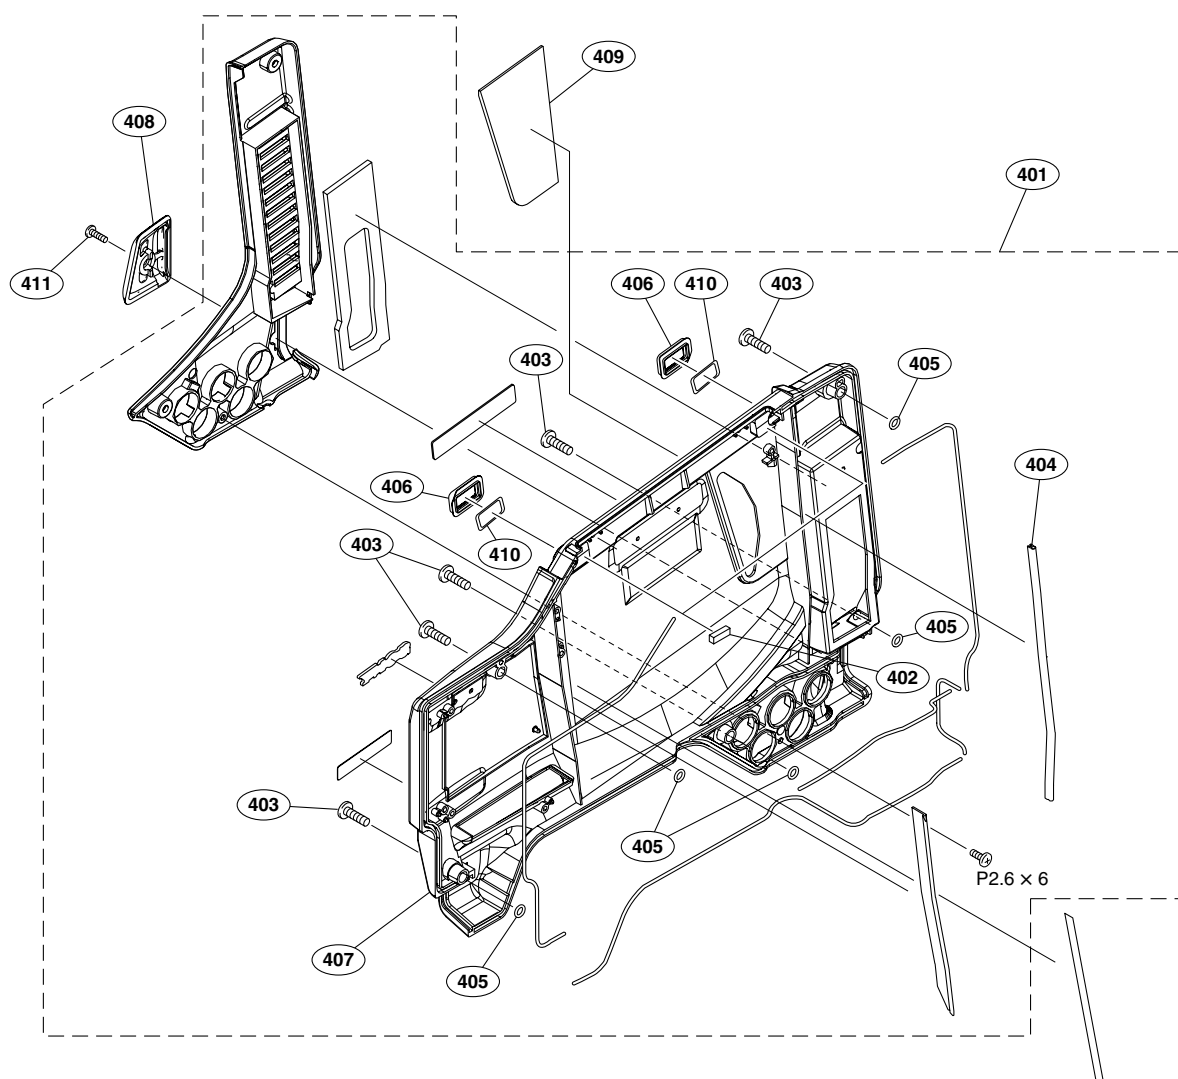

No.	Part No.	SP Description
401	A-1541-504-A	s PANEL (SUB ASSY), OUTSIDE
402	3-323-259-01	s SPACER (B)
403	3-603-680-02	s STAINLESS SCREW +B3X12
404	3-603-753-03	s DUST PROTECT(2)
405	3-672-250-01	s RING (M2.6), O
406	3-797-005-03	s PROTECTION,ARM LID
407	3-870-147-02	s PANEL, OUT SIDE
408	3-870-158-01	s PROTECTOR
409	3-870-159-01	s WINDOW, OUTSIDE
410	3-991-719-02	s SHEET,ADHENSIVE


No.	Part No.	SP Description
411	3-364-941-12	s SCREW (+B) (2.6X5), NYLOK
	7-685-133-11	s SCREW +P 2.6X6 TYPE2

Inside Panel 1

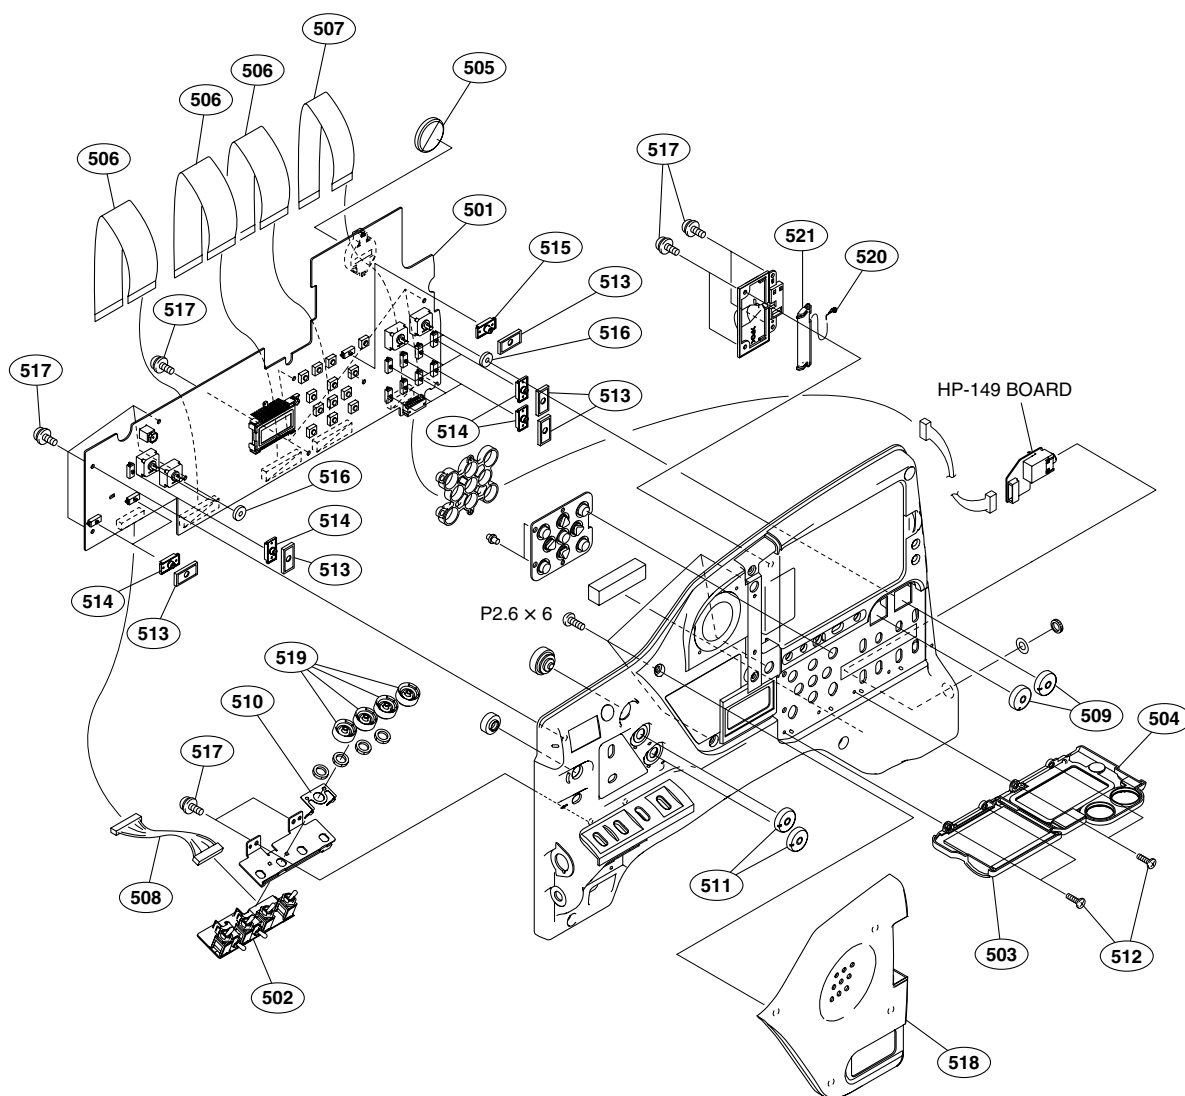


No.	Part No.	SP Description
501	A-1538-885-A	s MOUNTED CIRCUIT BOARD, FP-157
502	A-1540-101-A	s MOUNTED CIRCUIT BOARD, SW-1391
503	A-1541-498-A	s DOOR (L) ASSY, SWITCH
504	A-1541-499-B	s DOOR (R) ASSY, SWITCH
505	△ 1-528-174-31	s BATTERY, LITHIUM (CR2032 TYPE)
506	1-831-006-11	s CABLE, FLEXIBLE FLAT (30 CORE)
507	1-835-364-11	s CABLE, FLEXIBLE FLAT (12 CORE)
508	1-960-886-13	s HARNESS, SUB (SW1038)
509	3-611-740-03	s KNOB (2), VR
510	3-629-459-03	o PLATE, GROUND
511	3-680-219-03	s KNOB, VR
512	3-719-381-02	s SCREW (M2X4)
513	3-796-995-01	s DROP PROTECTION (SW)

No.	Part No.	SP Description
514	3-796-996-02	s KNOB (A), SW
515	3-796-998-01	s KNOB (B), SW
516	3-797-016-01	s CUSHION VOLUME AUDIO
517	3-855-938-01	s SCREW
518	3-870-115-02	s PAD (L), IN SIDE
519	3-870-137-02	s CAP, DROP PROTECTION
520	3-870-139-01	s SPRING, HELICAL TORSION
521	3-868-590-14	s PLATE BLIND, HINGI
	7-685-133-11	s SCREW +P 2.6X6 TYPE2

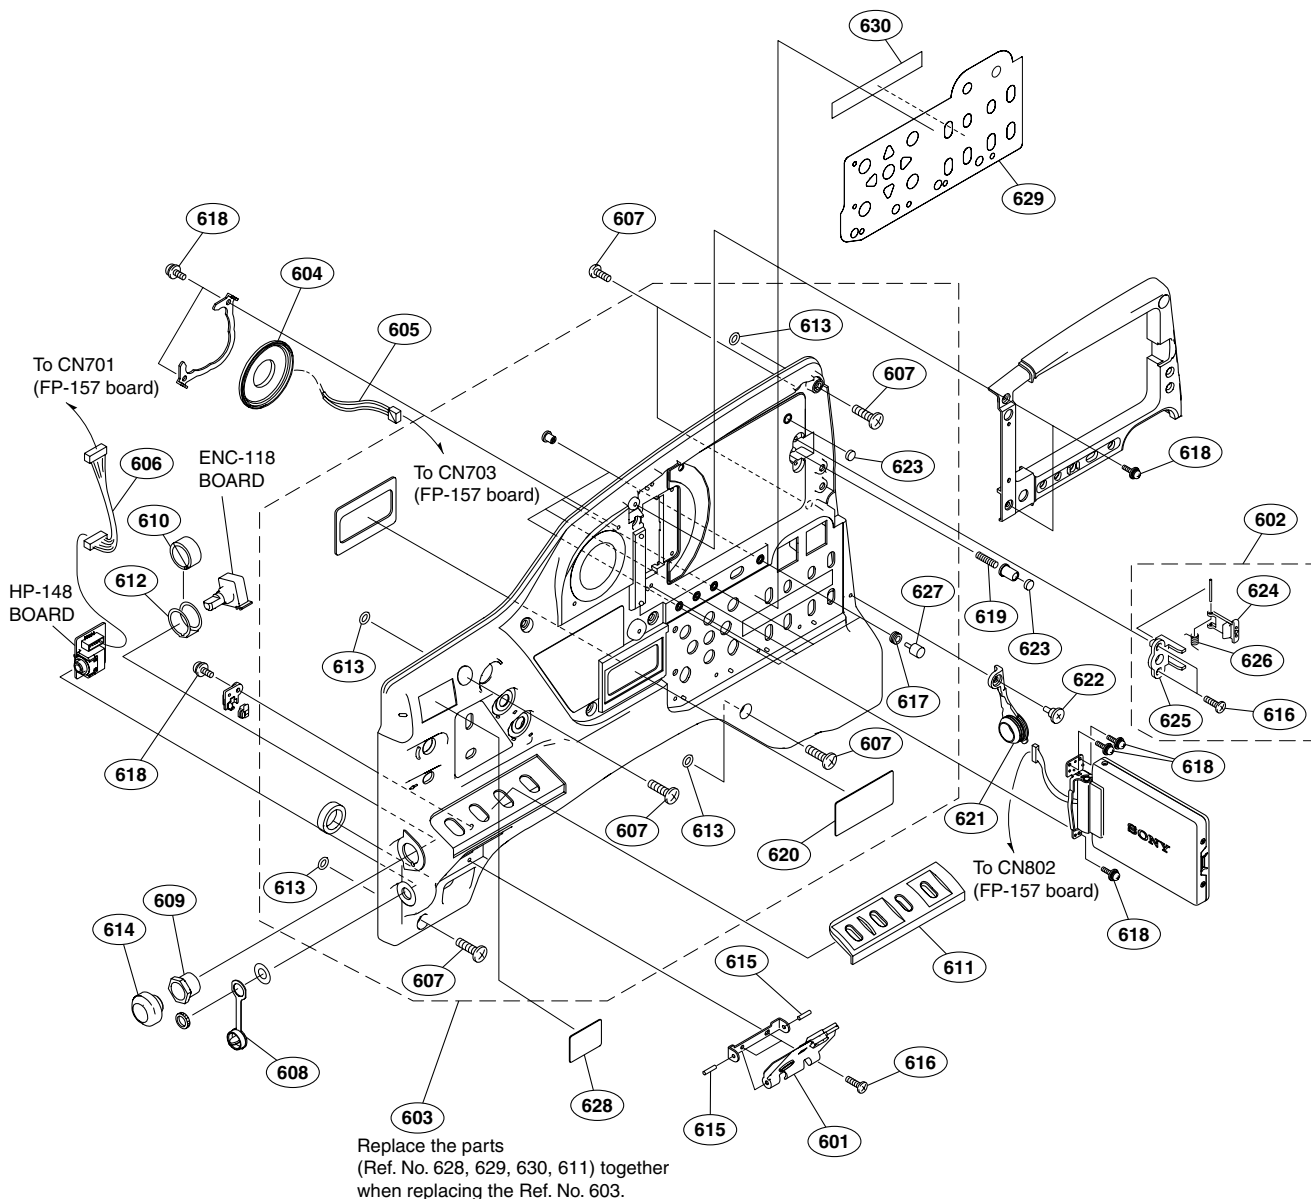


No.	Part No.	SP Description
601	A-1541-497-B	s DOOR, ASSY, MS
602	A-1541-500-A	s LCD LOCK ASSY
603	A-1541-502-A	s PANEL (SUB ASSY), INSIDE
604	1-503-293-12	s SPEAKER
605	1-960-882-13	s HARNESS, SUB (SPEAKER)
606	1-960-885-12	o HARNESS, SUB (HP103)
607	3-603-680-02	s STAINLESS SCREW +B3X12
608	3-620-733-01	s COVER HEADPHONE JACK
609	3-629-446-04	s SLEEVE (ENC2)
610	3-629-447-03	o SLEEVE (ENC1)
611	3-629-768-31	s ORNAMENTAL PLATE(3), SW, CAMERA
612	3-647-917-02	s PLATE, EARTH
613	3-672-250-01	s RING (M2.6), O
614	3-692-111-02	s KNOB, RE
615	3-703-357-03	s PIN, PARALLEL (DIA. 1.6X6)

No.	Part No.	SP Description
616	3-719-381-02	s SCREW (M2X4)
617	3-724-758-02	s RUBBER (PUSH), DROP PROTECTION
618	3-855-938-01	s SCREW
619	3-868-983-01	s SPRING, COMPRESSION
620	3-870-096-01	s WINDOW, TC
621	3-870-140-01	s COVER, HEADPHONE JACK
622	3-965-077-02	s SCREW, SPECIAL (M2)
623	3-969-387-01	s FOOT, RUBBER
624	3-868-588-13	s KNOB, LCD LOCK
625	3-868-589-12	s BASE, LOCK, LCD
626	3-869-457-01	s SPRING TORSION
627	3-797-073-01	s RES, SW PUSE
628	3-868-600-02	s LABEL, FILTER
629	3-870-114-02	s PLATE, SW ORNAMENTAL
630	3-879-092-01	s SHEET, SW PANEL

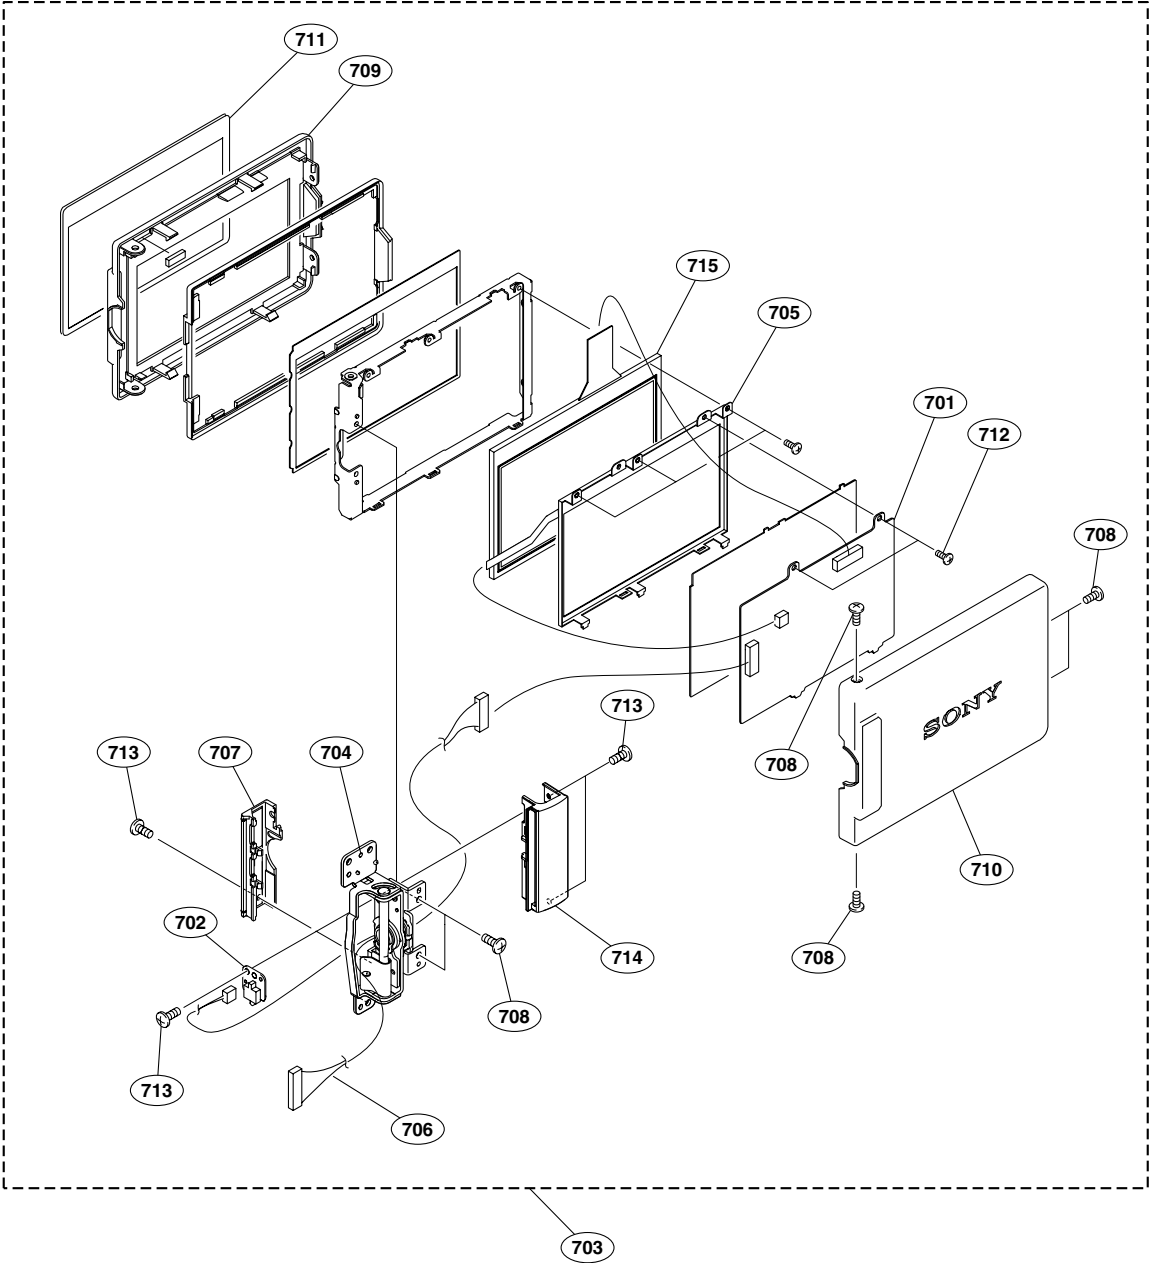


No.	Part No.	SP Description
701	A-1540-111-A	s MOUNTED CIRCUIT BOARD, PD-118
702	A-1540-127-A	s MOUNTED CIRCUIT BOARD, DET-45
703	A-1541-501-A	s LCD ASSY
704	X-3950-938-4	s HINGE ASSY
705	1-478-568-22	s BLOCK, LIGHT GUIDE PLATE (3.5)
706	1-966-077-11	s HARNESS, SUB (LCD7)
707	3-060-694-11	s COVER (REAR), HINGE
708	3-719-381-02	s SCREW (M2X4)
709	3-870-084-01	s BEZEL, LCD
710	3-870-085-01	s COVER, LCD
711	3-870-087-01	s LCD WINDOW
712	3-968-729-81	s SCREW (M2), LOCK ACE, P2
713	3-989-735-11	s SCREW (M1.7), LOCK ACE, P2
714	3-991-265-11	s (FRONT)COVER HINGI
715	8-753-208-98	s ACX530AK-1

Handle Block

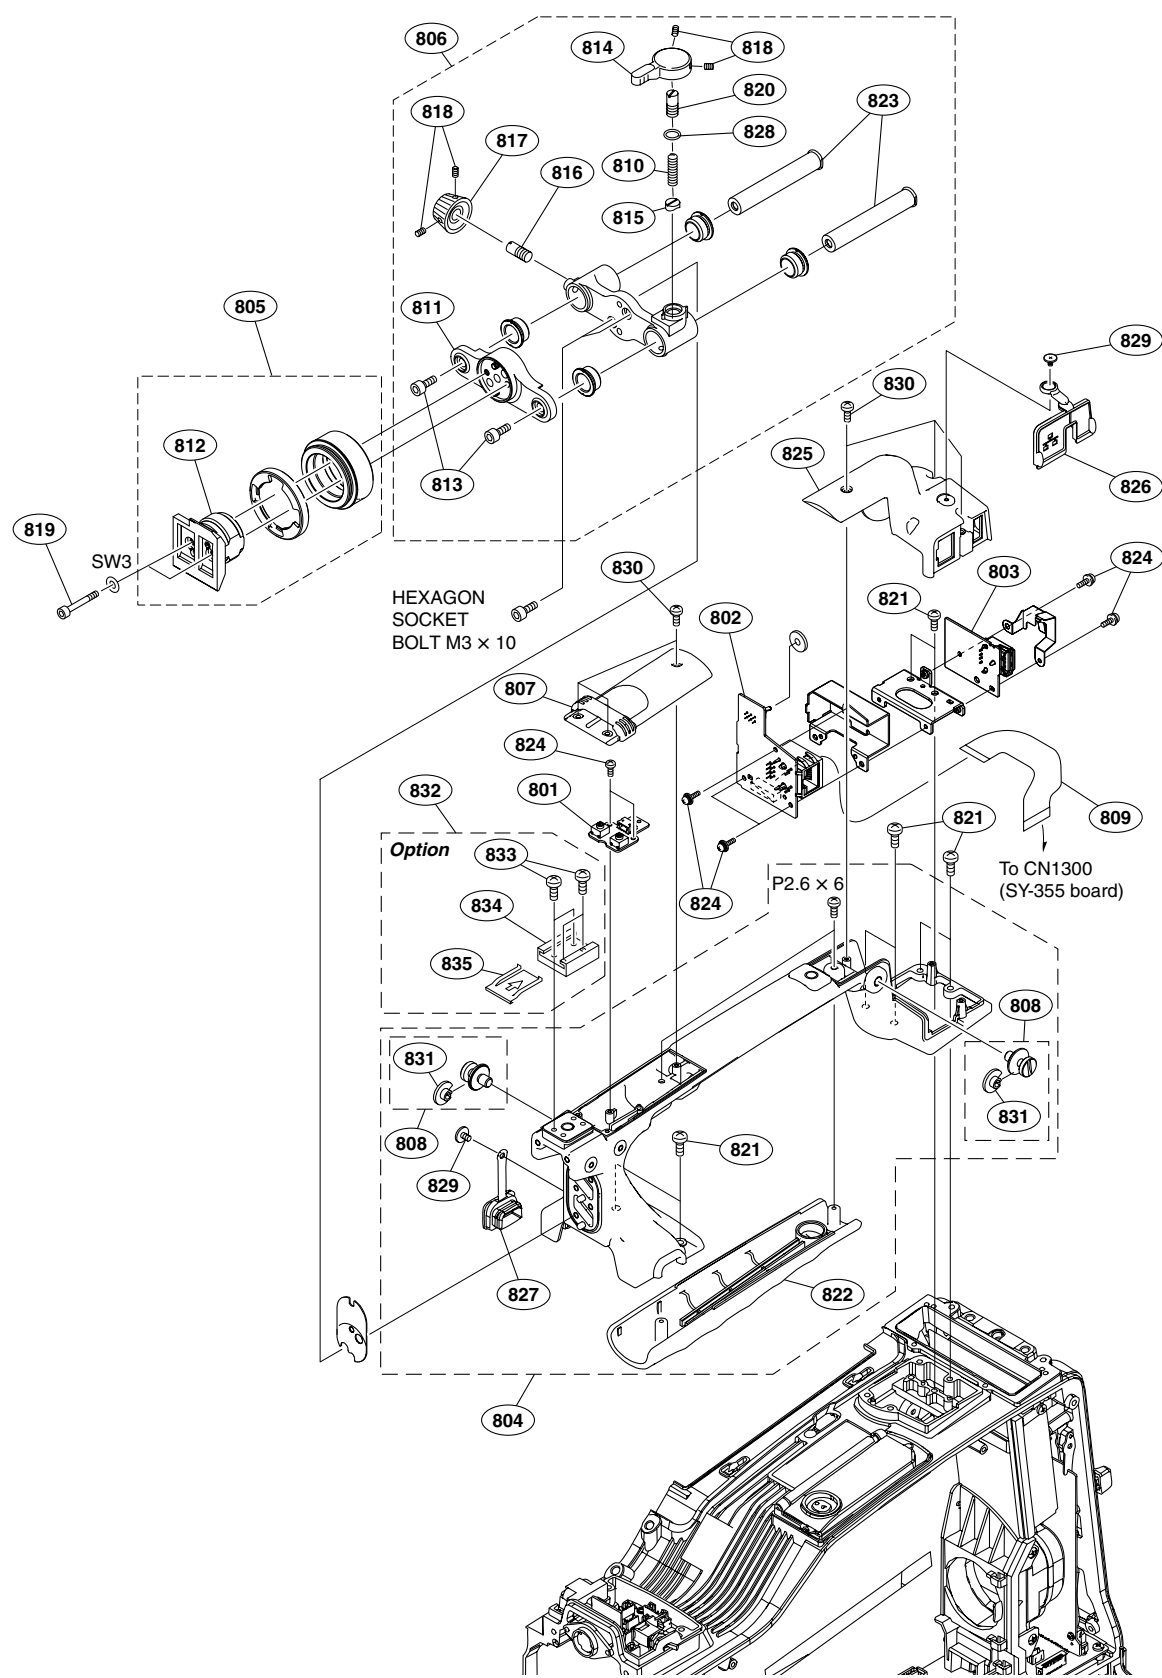


No.	Part No.	SP Description
801	A-1164-298-A	s MOUNTED CIRCUIT BOARD, SW-1249
802	A-1538-881-A	s MOUNTED CIRCUIT BOARD, CN-2946
803	A-1540-099-A	s MOUNTED CIRCUIT BOARD, CN-3026
804	A-1541-491-A	s HANDLE SUB ASSY
805	A-8278-412-J	s SHOE ASSY,VF
806	A-8279-413-G	s SLIDE ASSY(LB),VF
807	X-3608-704-2	s COVER ASSY,HANDLE
808	X-3710-037-1	s SUSPENSION ASSY (C)
809	1-876-959-11	s FPC (ETHER)
810	3-612-822-01	s SPRING,COMPRESSION
811	3-617-745-04	s FIXED TABLE(WS),VF SHOE
812	3-627-853-07	s SHOE,SLIDE
813	3-657-705-91	s BOLT (M4X8), HEXAGON HOLE
814	3-673-046-21	s LEVER, LOCK
815	3-679-702-11	s CUSION,STOPPER
816	3-690-660-02	s LOCK,SCREW
817	3-690-674-02	s KNOB,LOCK
818	3-701-507-01	s SET SCREW, DOUBLE POINT,(M3X5)
819	3-711-765-01	s BOLT (M3), HEXAGON SOCKET
820	3-711-794-12	s PIN, STOPPER
821	3-742-074-13	s SCREW (+B 3X8)
822	3-796-975-02	s COVER BOTTOM,HANDLE
823	3-826-074-01	s PIPE,VF SLIDE
824	3-855-938-01	s SCREW
825	3-870-200-01	s COVER, TALLY
826	3-870-237-01	s COVER (HANDLE), CONNECTOR
827	3-877-892-01	s LIGHT CONNECTOR COVER
828	3-895-622-01	s RING (DIA. 5), O
829	3-965-077-02	s SCREW, SPECIAL (M2)
830	4-654-273-02	s ACE (M2), LOCK
831	3-654-615-02	s COLLAR, SUSPENSION
832	X-2546-633-1	s KIT, COLD SHOE
833	3-080-203-31	s SCREW (M2), LOCK ACE, P2
834	3-688-755-13	s SHOE, ACCESSORY
835	3-688-754-11	s SPRING
	7-623-208-22	s SW 3,TYPE 2
	7-683-405-04	s BOLT,HEXAGON SOCKET 3X10
	7-685-133-11	s SCREW +P 2.6X6 TYPE2

Connector Panel

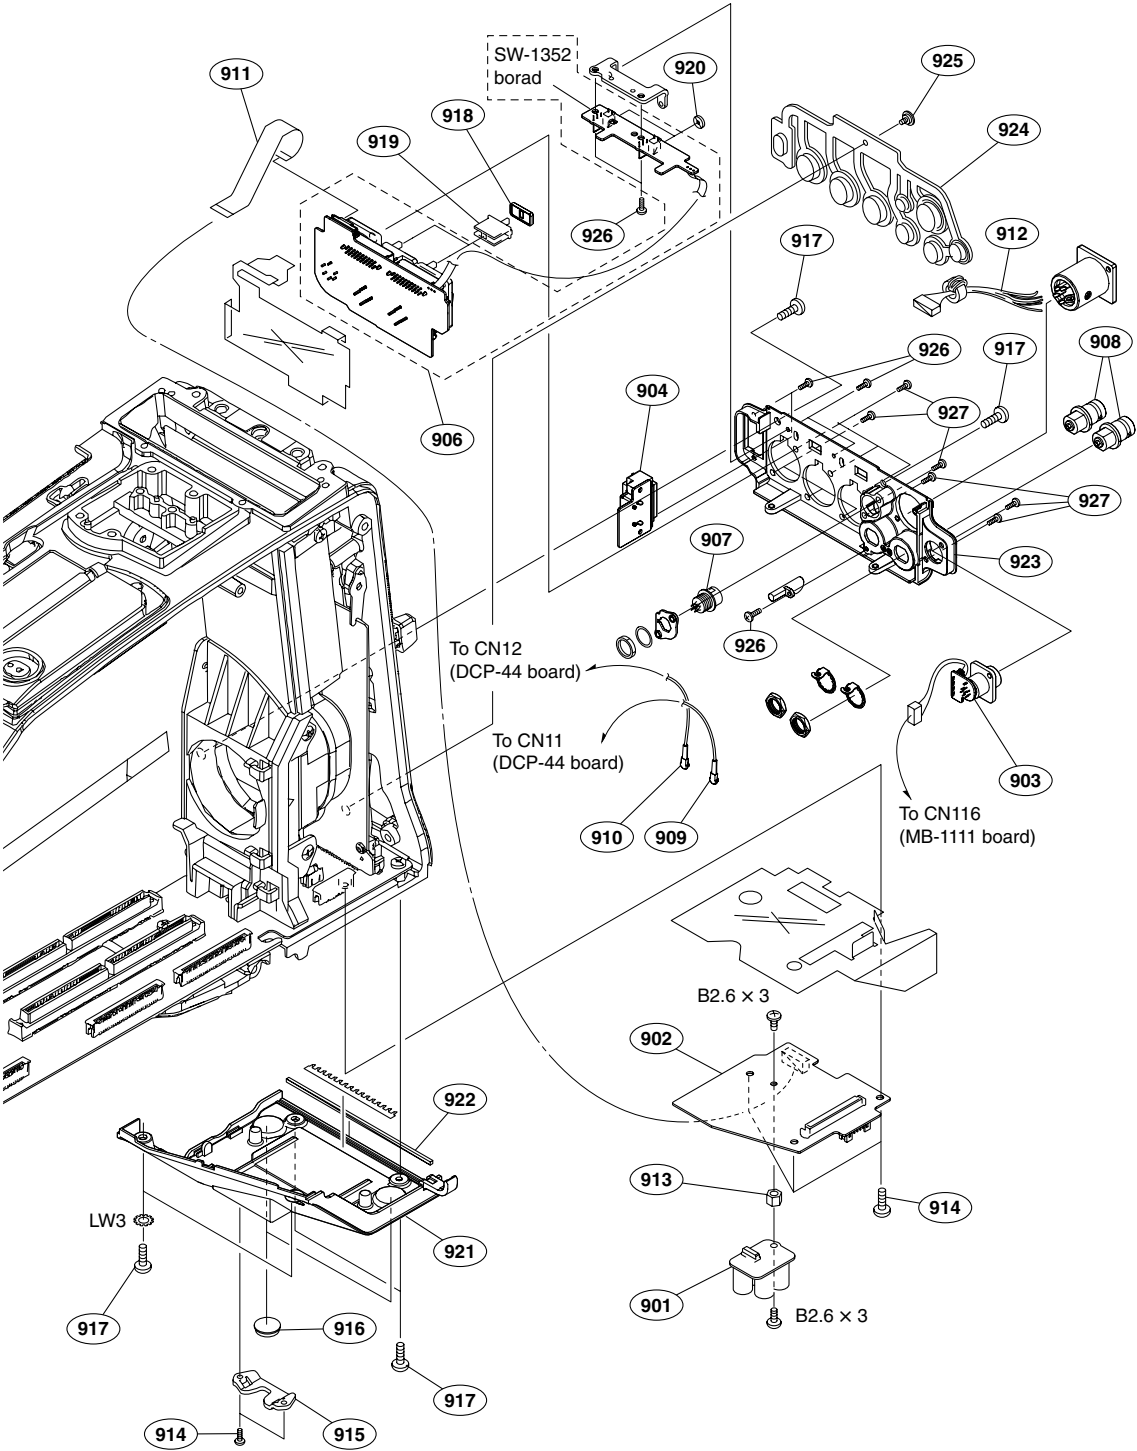


No.	Part No.	SP Description
901	A-1164-283-A	s MOUNTED CIRCUIT BOARD, PS-708
902	A-1538-882-A	s MOUNTED CIRCUIT BOARD, CNB-25
903	A-1540-121-A	s MOUNTED CIRCUIT BOARD, RM-216
904	A-1540-123-A	s MOUNTED CIRCUIT BOARD, CN-2948
906	A-1545-896-A	s MOUNTED CIRCUIT BOARD, AXM-38
907	1-565-072-12	s CONNECTOR, ROUND TYPE (RF) 4P
908	1-784-240-11	s CONVERTER, COAXIAL CONNECTOR
909	1-835-365-11	s CABLE ASSEMBLY, COAXIAL
910	1-835-369-11	s CABLE ASSEMBLY, COAXIAL
911	1-876-957-11	s FPC (CNB-AXM)
912	1-966-081-11	s HARNESS, SUB (DCIN2)
913	2-534-514-02	o SUPPORT (1)
914	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
915	3-626-781-03	s STOPPER
916	3-723-097-01	o FOOT, RUBBER
917	3-742-074-13	s SCREW (+B 3X8)
918	3-796-985-02	s CUSHION,DROP PROTECTION
919	3-796-986-01	s KNOB,SLIDE SW
920	3-796-993-01	s CUSION DROP PROTEICTION TOGGLE
921	3-870-172-01	s COVER, CONNECTOR
922	3-870-173-01	s RUBBER, SHIELD
923	3-870-174-02	s PANEL, CONNECTOR
924	3-870-246-02	s COVER (XLR), DROP PROTECTION
925	3-965-077-02	s SCREW, SPECIAL (M2)
926	4-654-273-02	s ACE (M2), LOCK
927	4-674-315-01	s SCREW (M2.6X6)
	7-621-775-08	s SCREW +B 2.6X3
	7-623-308-07	s LW3, TYPE (A)

Rear Panel

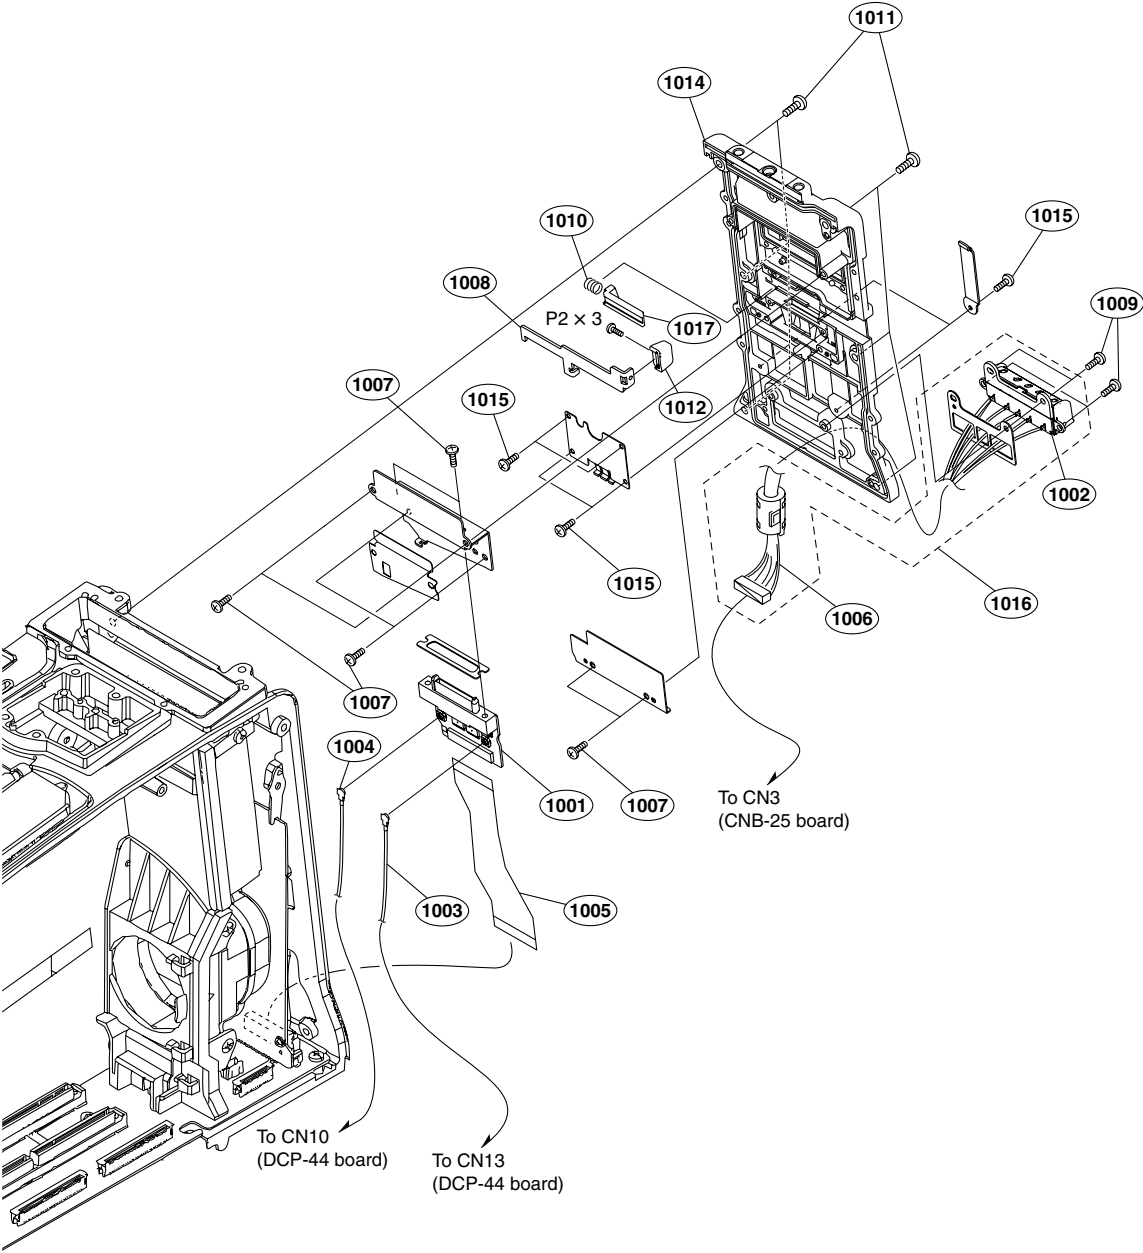


No.	Part No.	SP Description
1001	A-1540-087-A	s MOUNTED CIRCUIT BOARD, CI-37
1002	1-820-459-21	s CONNECTOR, BATTERY
1003	1-835-367-11	s CABLE ASSEMBLY, COAXIAL
1004	1-835-368-11	s CABLE ASSEMBLY, COAXIAL
1005	1-876-961-11	s FPC (CI)
1006	1-966-082-11	s HARNESS, SUB (BATT3)
1007	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
1008	3-679-688-03	s LEVER, RELEASE
1009	3-694-181-03	s TYPE1, AROCK PRECISION +P2.6X5
1010	3-704-964-01	s SPRING, COMPRESSION
1011	3-742-074-13	s SCREW (+B 3X8)
1012	3-796-949-01	s KNOB, RELEASE LEVER
1014	3-870-163-01	s PANEL, REAR
1015	4-654-273-02	s ACE (M2), LOCK
1016	A-1558-293-B	s HARNESS ASSY, BATT
1017	3-679-687-02	s LOCK, SLIDE
	7-627-553-38	s SCREW, PRECISION +P 2X3

Chassis 1

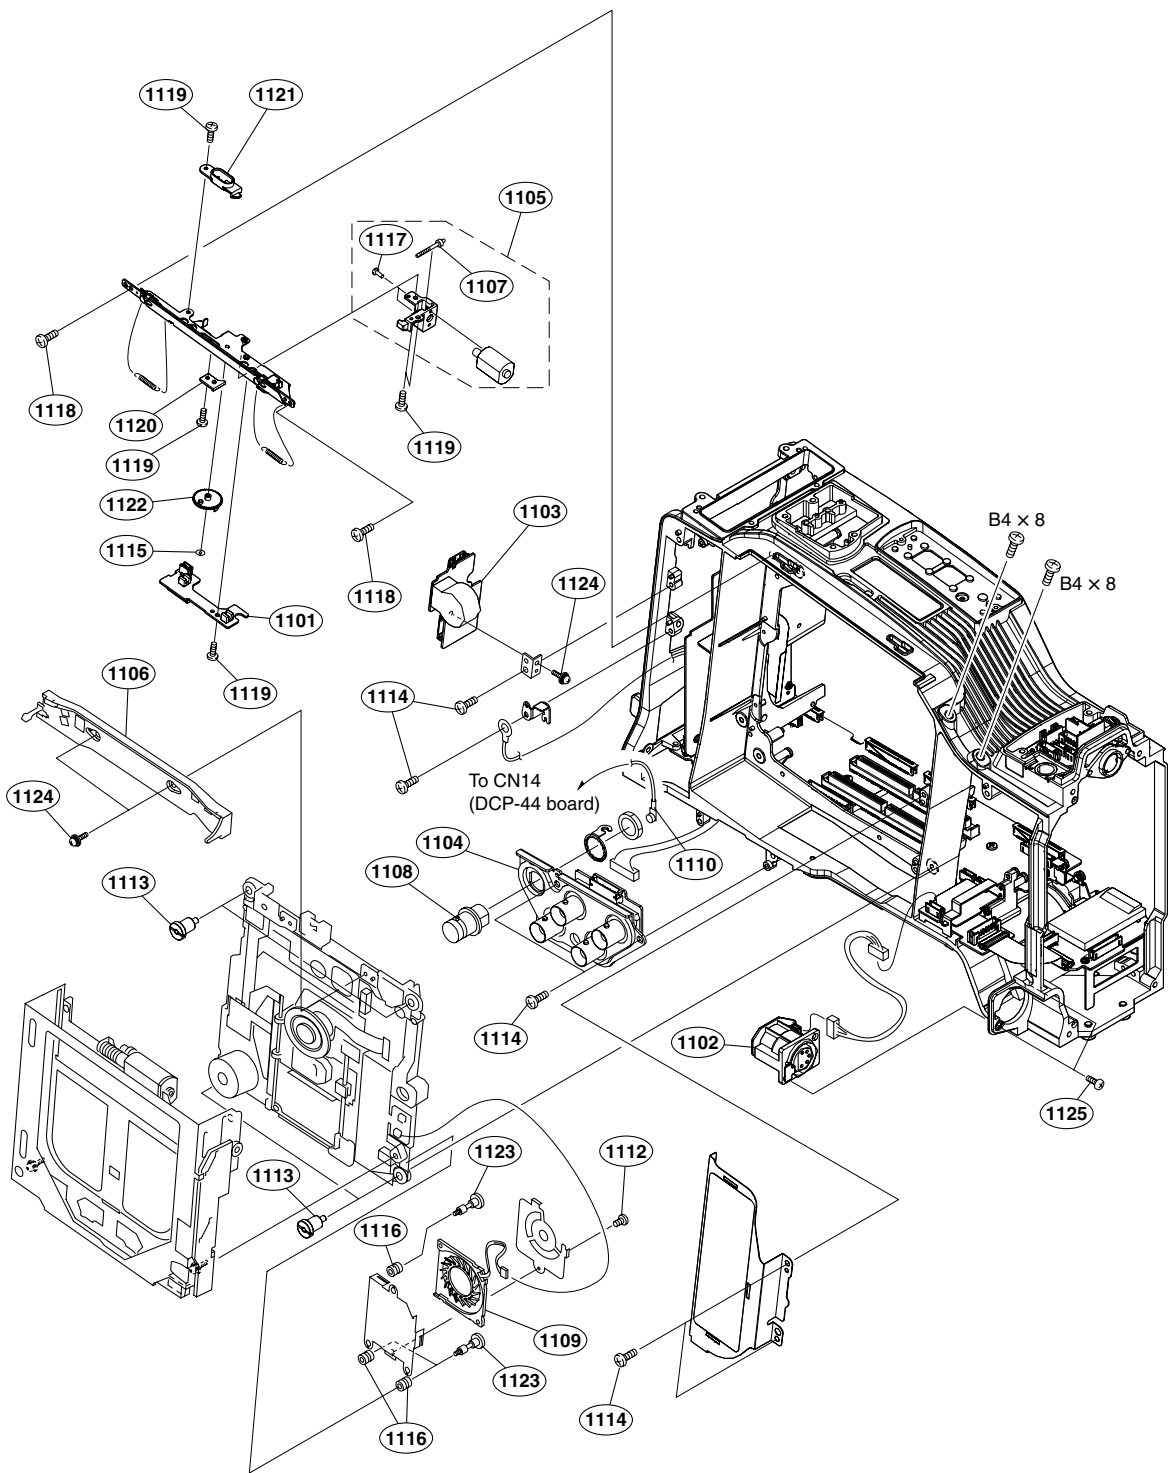


No.	Part No.	SP Description
1101	A-1317-214-A	s MOUNTED CIRCUIT BOARD, SW-1385
1102	A-1540-095-A	s MOUNTED CIRCUIT BOARD, CN-3001
1103	A-1540-112-A	s MOUNTED CIRCUIT BOARD, PS-731
1104	A-1540-124-A	s MOUNTED CIRCUIT BOARD, IO-235
1105	A-8279-912-B	s MOTOR SUB ASSY, LD
1106	X-2187-621-3	s GUARD 2 ASSY, SW
1107	X-3945-435-3	s SHAFT (12) ASSY, WORM
1108	1-784-240-11	s CONVERTER, COAXIAL CONNECTOR
1109	△ 1-787-645-12	s D.C. FAN (35 SQUARE)
1110	1-835-366-11	s CABLE ASSEMBLY, COAXIAL
1112	2-635-562-11	s SCREW (M1.7)
1113	3-277-093-01	s SCREW (DIA.9), STEP
1114	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
1115	3-559-408-11	s WASHER, POLYETHYLENE, DIA.1.2
1116	3-617-812-01	s VIBRATION PROOF, RUBBER
1117	3-703-816-45	s SCREW (M1.4X2.5), SPECIAL HEAD
1118	3-968-729-81	s SCREW (M2), LOCK ACE, P2
1119	3-729-076-11	s SCREW (+B) (2X4)
1120	3-797-030-01	s ARM, RELEASE
1121	3-797-031-03	s GUIDE, EJECT
1122	3-797-063-03	s GEAR, RELEASE
1123	3-825-467-02	s SCREW, STEP
1124	3-855-938-01	s SCREW
1125	4-674-315-01	s SCREW (M2.6X6)
	7-621-775-08	s SCREW +B 2.6X3

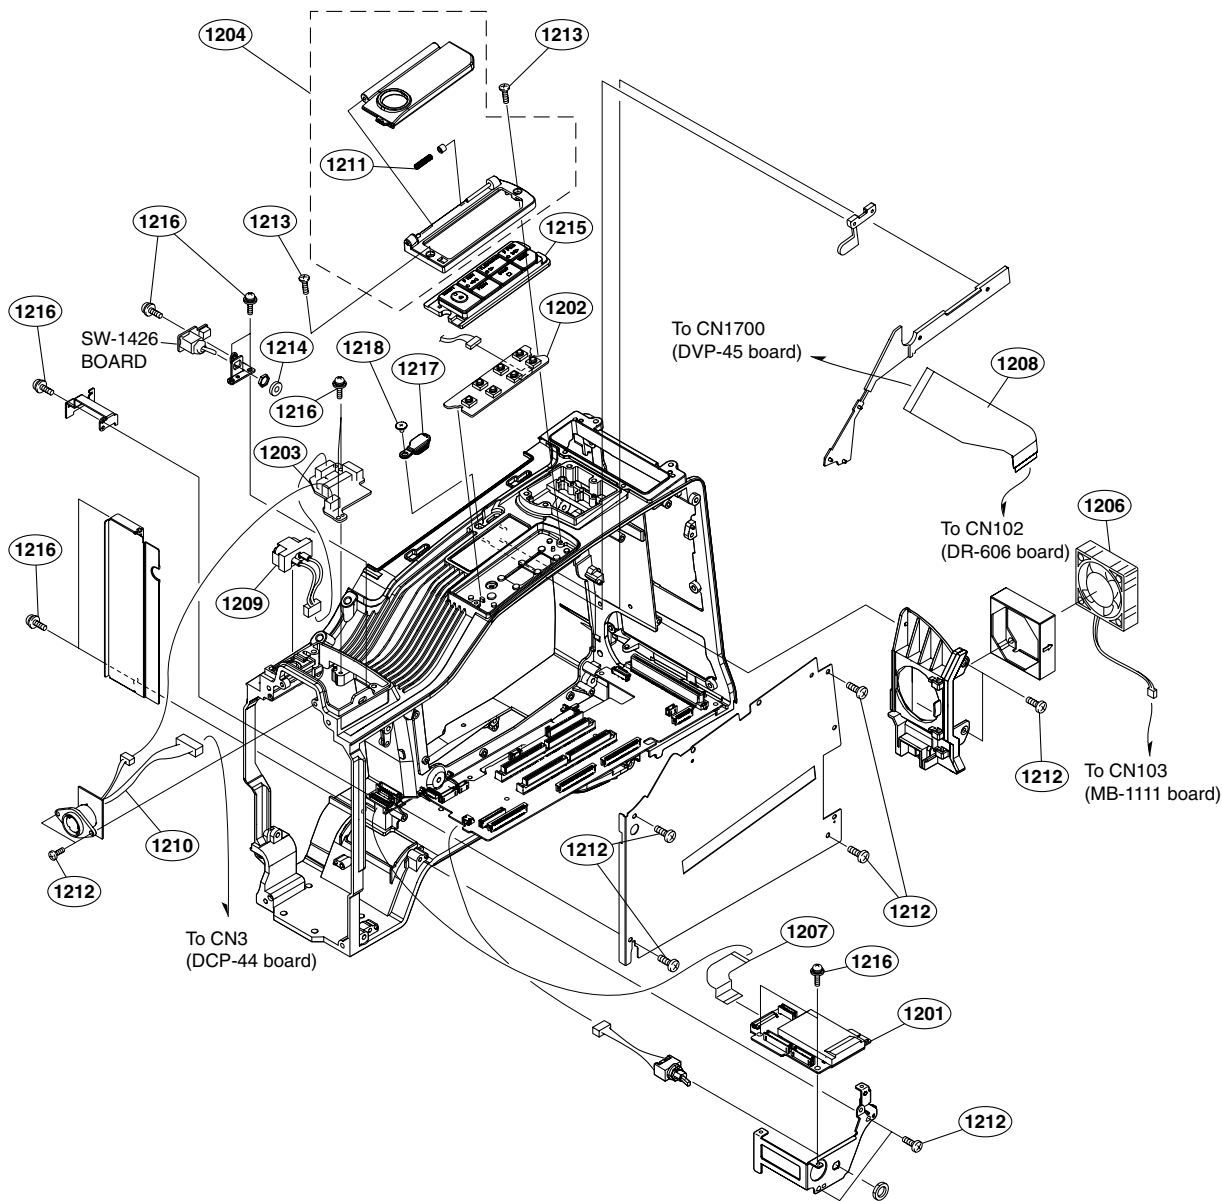


No.	Part No.	SP Description
1201	A-1540-096-A	s MOUNTED CIRCUIT BOARD, MS-86
1202	A-1540-109-A	s MOUNTED CIRCUIT BOARD, KY-623
1203	A-1540-118-A	s MOUNTED CIRCUIT BOARD, CN-3005
1204	A-1541-496-A	s KEY FRAME ASSY
1206	△ 1-787-070-21	s FAN, DC (41 SQUARE)
1207	1-876-958-11	s FPC (MS)
1208	1-876-960-11	s FPC (ATA)
1209	1-964-607-11	s HARNESS, SUB (DDOUTLGT)
1210	1-966-070-11	s HARNESS (VF)
1211	3-234-710-01	o SPRING (OPEN), COMPRESSION COIL
1212	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
1213	4-654-273-02	s ACE (M2), LOCK
1214	3-796-980-02	s DROP PROTECTION (LIGHT)
1215	3-797-024-02	s COVER, KEY SW
1216	3-855-938-01	s SCREW
1217	3-870-253-02	s CAP ME
1218	3-965-077-02	s SCREW, SPECIAL (M2)

Chassis 3

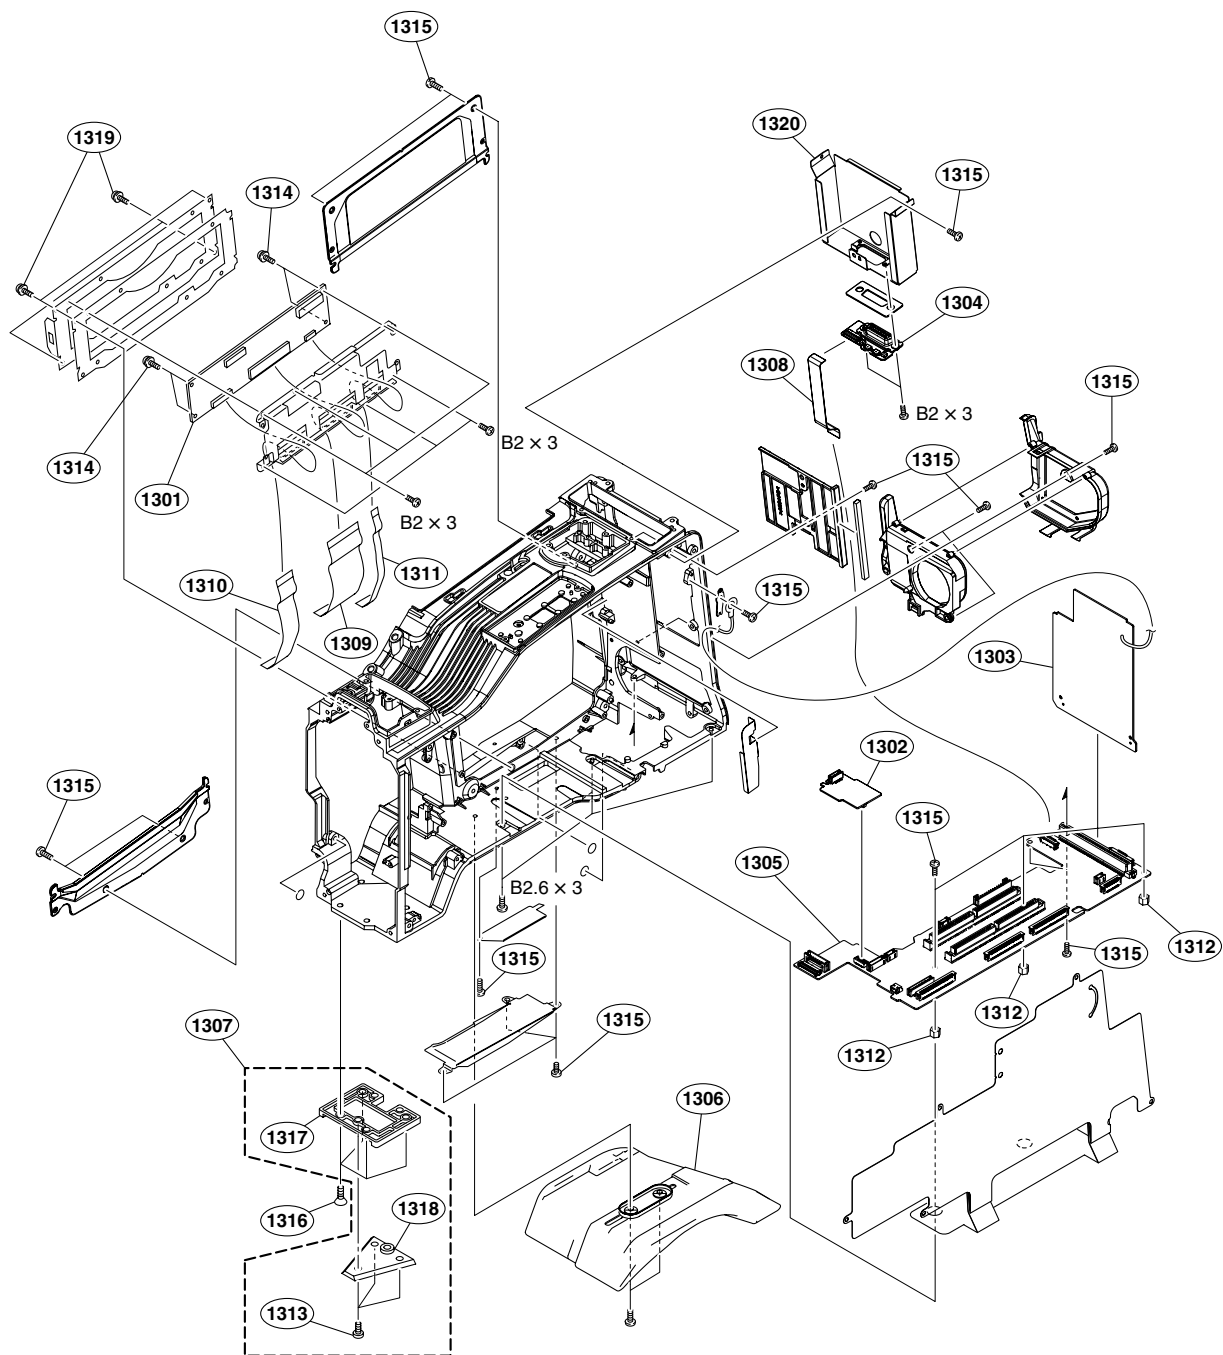


No.	Part No.	SP Description
1301	A-1418-765-A	s DR-606 (P100) COMPL (RP)
1302	A-1538-886-A	s MOUNTED CIRCUIT BOARD, MA-162
1303	A-1538-887-A	s MOUNTED CIRCUIT BOARD, RE-246
1304	A-1540-094-A	s MOUNTED CIRCUIT BOARD, RX-101
1305	A-1540-107-A	s MOUNTED CIRCUIT BOARD, MB-1111
1306	A-8279-878-G	s PAD ASSY, SHOULDER
1307	A-8279-993-C	s SHOE (D) ASSY, V
1308	1-831-111-11	s CABLE, FLEXIBLE FLAT (24 CORE)
1309	1-875-555-11	s FPC (DR-OP) P100
1310	1-875-556-11	s FPC (DR-SE857) P100
1311	1-875-557-11	s FPC (DR-SE858) P100
1312	2-534-514-02	o SUPPORT (1)
1313	3-271-563-01	s SCREW +P M4X6
1314	3-286-141-01	s +PSW 2X4
1315	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK
1316	3-729-072-02	s SCREW, +K (4X8)
1317	3-854-769-02	s SHOE (D), CAMERA
1318	3-854-770-02	s WEDGE (D), MOUNTING
1319	3-855-938-01	s SCREW
1320	3-870-190-01	s CASE, WRR
	7-621-772-08	s SCREW +B 2X3
	7-621-775-08	s SCREW +B 2.6X3

Loader Block

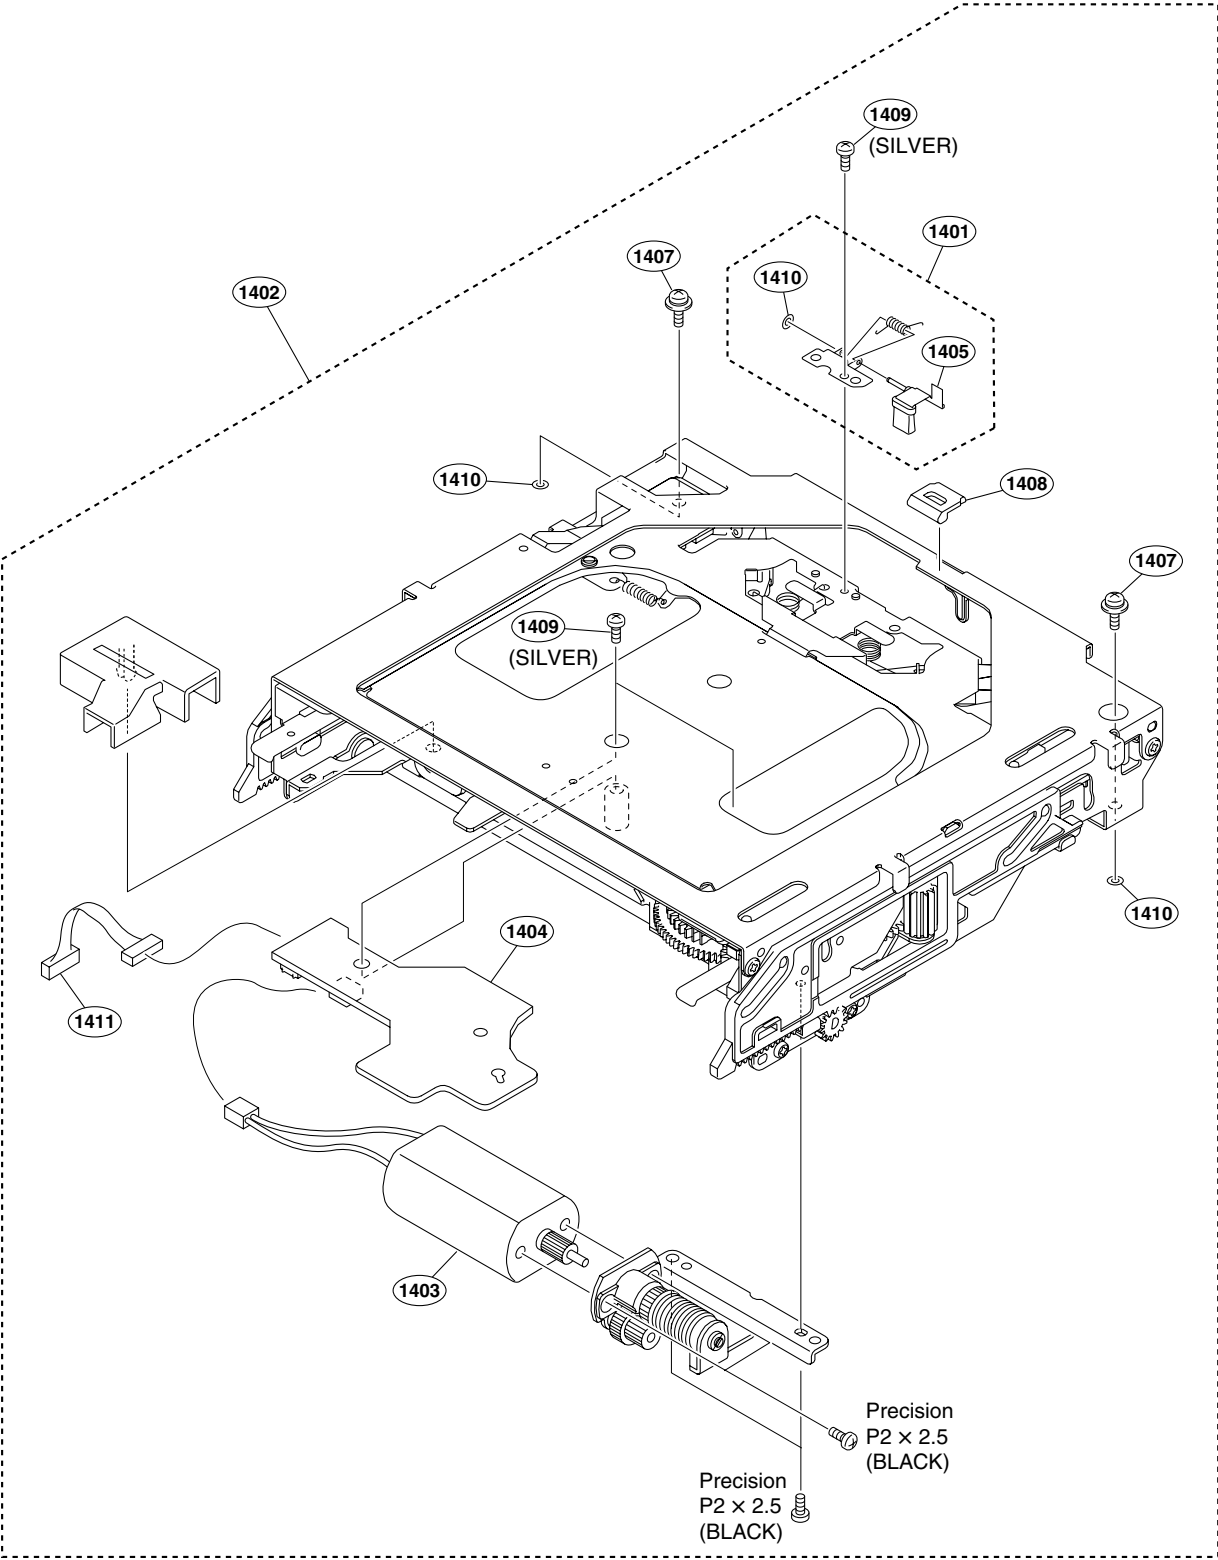

No.	Part No.	SP Description
1401	A-1256-291-A	s CLEANER (P100) ASSY
1402	A-1256-958-E	s LOADER (P100) ASSY (RP)
1403	A-8347-267-A	s MOTOR (P1) ASSY, LOADING
1404	A-8347-272-A	s MOUNTED CIRCUIT BOARD, SE-709
1405	X-2177-881-2	s BRACKET ASSY,BRUSH
1407	2-640-315-02	o SCREW (M2X5), SMALL, +P, SW
1408	3-197-718-02	s CL SPACER


No.	Part No.	SP Description
1409	3-624-231-01	s SCREW M2,SPECIAL
1410	3-669-465-01	s WASHER (1.5), STOPPER
1411	1-962-531-12	s HARNESS, SUB (HN292-SE709)
	7-627-854-08	s PRECISION SCREW +P 2X2.5 TYPE3

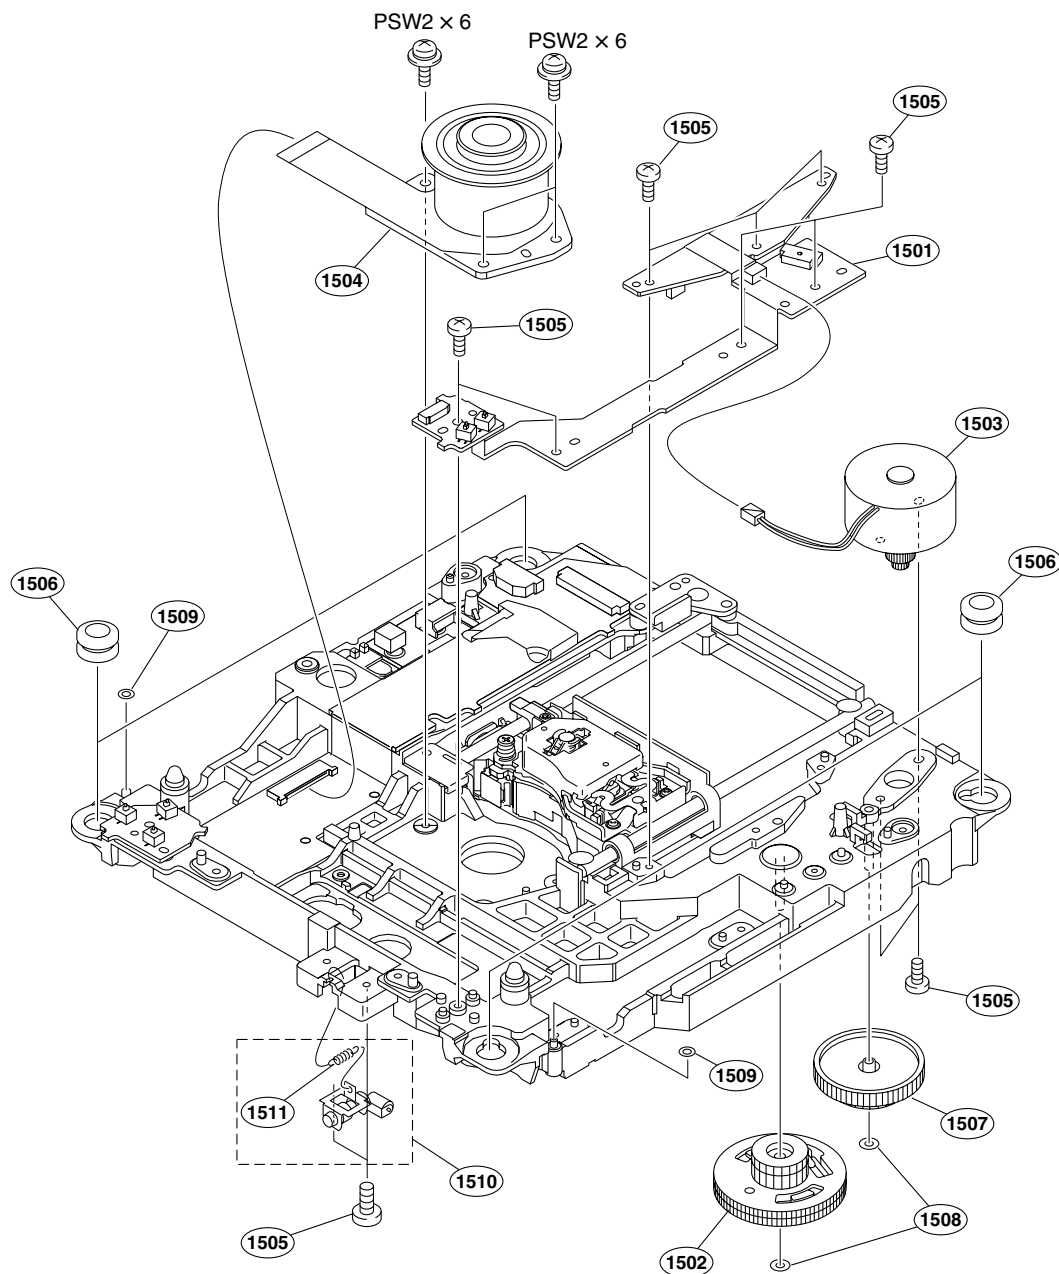

No.	Part No.	SP Description
1501	A-1366-120-A	s PRINTED WIRING BOARD, SE-858
1502	A-1369-355-A	s GEAR ASSY, NO.3
1503	A-1374-689-A	s MOTOR ASSY, SEEK
1504	△ 1-787-046-92	s MOTOR, DC (SPINDLE)
1505	2-635-562-11	s SCREW (M1.7)
1506	3-277-087-01	s DAMPER
1507	3-277-224-01	s GEAR, HELICAL, NO.2
1508	3-669-465-01	s WASHER (1.5), STOPPER

No.	Part No.	SP Description
1509	3-854-705-01	s SPACER LD
1510	A-1368-046-A	s ME ASSY
1511	3-796-403-01	s SPRING (ME), EXTENSION
	7-628-000-05	s +PSW 2X6

Drive Block 2

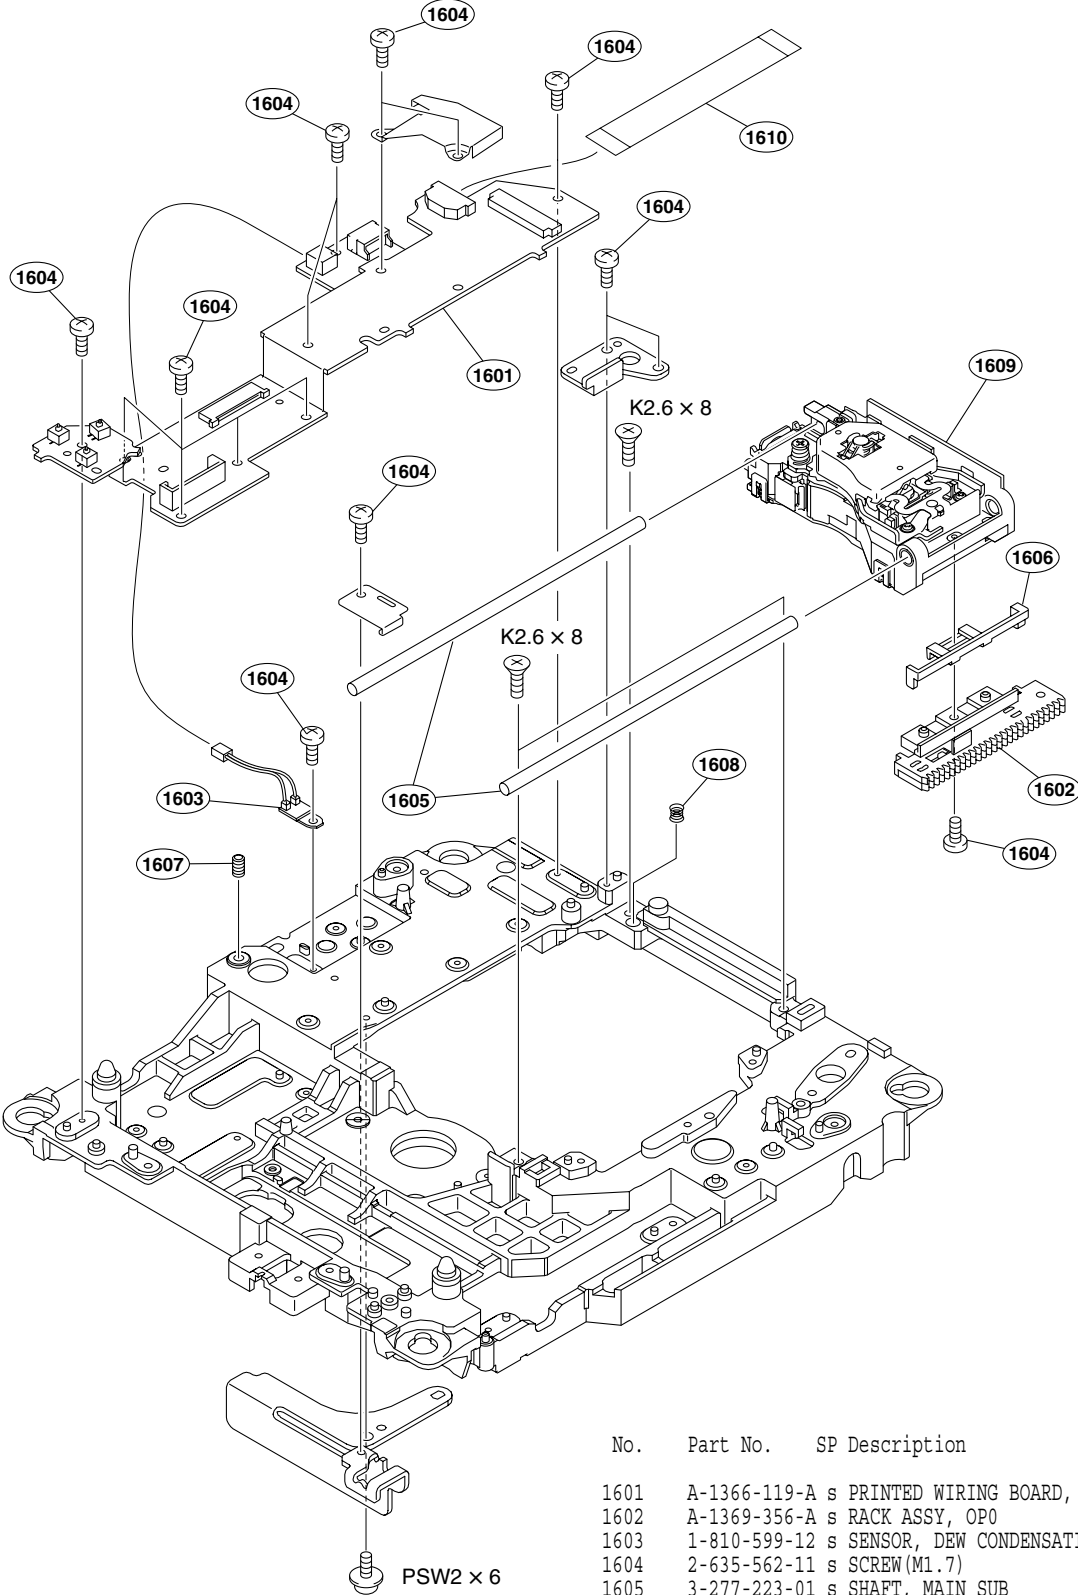

No.	Part No.	SP Description
1601	A-1366-119-A	s PRINTED WIRING BOARD, SE-857
1602	A-1369-356-A	s RACK ASSY, OP0
1603	1-810-599-12	s SENSOR, DEW CONDENSATION
1604	2-635-562-11	s SCREW(M1.7)
1605	3-277-223-01	s SHAFT, MAIN SUB
1606	3-277-227-01	s RUBBER, STOPPER, OP
1607	3-277-388-01	s SCREW, ADJUST, M2.6
1608	3-796-307-01	s SPRING(SKEW),COMPRESSION
1609	△ 8-820-389-02	s DEVICE, OPTICAL KES-330A/J1RP
1610	1-874-831-11	s FPC((P100)LOADER)

7-621-592-10 s SCREW +K 2.6X8
7-628-000-05 s +PSW 2X6

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C602	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C616	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C622	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C632	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C633	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C634	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C635	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C636	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN200	1-785-846-91	o CONNECTOR, BOARD TO BOARD 40P
CN601	1-818-579-91	s CONNECTOR, BOARD TO BOARD (60P)
CN602	1-580-789-21	s PIN, CONNECTOR (SMD) 6P
D500	8-719-989-04	s DIODE DAN222-TL
D501	8-719-989-04	s DIODE DAN222-TL
D502	8-719-989-04	s DIODE DAN222-TL
D600	8-719-989-04	s DIODE DAN222-TL
E100	1-535-877-22	s CHIP, CHECKER
E101	1-535-877-22	s CHIP, CHECKER
E102	1-535-877-22	s CHIP, CHECKER
E103	1-535-877-22	s CHIP, CHECKER
FB100	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB500	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB501	1-469-094-21	s FERRITE, EMI (SMD) (1608)
IC100	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC101	8-759-656-54	s IC TC7WH14FK (TE85R)
IC102	8-759-392-77	s IC SN74LVC245APWR
IC103	8-759-392-77	s IC SN74LVC245APWR
IC104	8-759-392-77	s IC SN74LVC245APWR
IC200	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC201	8-759-592-47	s IC TC7SZ08FU (TE85R)
IC202	8-759-683-24	s IC MAX821RUS+TG069
IC203	6-702-879-01	s IC R3112N281A-TR-FA
IC207	6-706-879-01	s IC TPS62020DRCR
IC210	8-759-337-40	s IC NJM2904V (TE2)
IC211	8-759-337-40	s IC NJM2904V (TE2)
IC212	8-759-337-40	s IC NJM2904V (TE2)
IC301	8-759-675-54	s IC TC7W53FK (TE85R)
IC307	8-759-669-43	s IC SN74LVC157APWR-12
IC311	8-759-679-55	s IC SN74LVC08APWR
IC312	8-759-679-55	s IC SN74LVC08APWR
IC400	8-759-392-77	s IC SN74LVC245APWR
IC402	6-600-060-01	s IC TC7WZ32FK (TE85R)
IC403	8-759-825-66	s IC SN74LVC139APWR
IC404	6-600-060-01	s IC TC7WZ32FK (TE85R)
IC405	8-759-669-44	s IC SN74LVC74APWR-12
IC406	8-759-598-44	s IC TC7WH08FK (TE85R)
IC407	8-759-669-42	s IC SN74LVC138APWR-12
IC408	6-702-319-01	s IC TC7WZ04FK (TE85R)
IC409	8-759-656-54	s IC TC7WH14FK (TE85R)
IC410	8-752-392-03	s IC CXD1095BR
IC411	8-759-594-17	o IC CXD9093R
IC412	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC413	6-704-099-01	s IC TC7WZ08FK (TE85R)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC414	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC415	8-759-669-44	s IC SN74LVC74APWR-12
IC416	8-759-592-47	s IC TC7SZ08FU (TE85R)
IC417	8-759-592-47	s IC TC7SZ08FU (TE85R)
IC418	8-759-592-44	s IC TC7SZ04FU (TE85R)
IC419	8-759-392-77	s IC SN74LVC245APWR
IC420	8-759-680-48	s IC TC7WH157FK (TE85R)
IC500	8-759-680-48	s IC TC7WH157FK (TE85R)
IC501	6-600-060-01	s IC TC7WZ32FK (TE85R)
IC502	8-759-675-54	s IC TC7W53FK (TE85R)
IC503	8-759-679-55	s IC SN74LVC08APWR
IC504	8-759-656-54	s IC TC7WH14FK (TE85R)
IC505	8-759-680-48	s IC TC7WH157FK (TE85R)
IC506	6-701-905-01	s IC AM26C31CDBR
IC507	6-705-514-01	s IC MAX3222IPWR
IC508	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC509	8-759-675-54	s IC TC7W53FK (TE85R)
IC510	8-759-592-48	s IC TC7SZ32FU (TE85R)
IC511	8-759-680-48	s IC TC7WH157FK (TE85R)
IC512	6-702-319-01	s IC TC7WZ04FK (TE85R)
IC601	6-600-060-01	s IC TC7WZ32FK (TE85R)
IC605	8-759-656-54	s IC TC7WH14FK (TE85R)
IC608	6-700-831-01	s IC TC7WZ74FK (TE85R)
IC610	8-759-584-32	s IC MB86189PFV-G-BND-ER-E1
IC611	6-704-099-01	s IC TC7WZ08FK (TE85R)
IC614	8-759-694-36	s IC SN74CBTLV3257PWR
IC615	8-759-679-55	s IC SN74LVC08APWR
IC618	8-759-679-55	s IC SN74LVC08APWR
IC619	6-704-099-01	s IC TC7WZ08FK (TE85R)
L100	1-419-630-21	s COIL, CHOKE 4.7UH
L101	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L200	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L201	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L202	1-416-344-21	s COIL, CHOKE 10UH
L500	1-469-555-21	s INDUCTOR, CHIP 10UH (LB2016)
L602	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L603	1-469-555-21	s INDUCTOR, CHIP 10UH (LB2016)
PH500	8-749-014-35	s IC HCPL-0630-500
Q500	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q501	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q502	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q503	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q504	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q505	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q600	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q601	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
R100	1-208-863-81	s RES, CHIP 100 (1005)
R101	1-208-943-81	s RES, CHIP 220K (1005)
R103	1-208-863-81	s RES, CHIP 100 (1005)
R104	1-208-863-81	s RES, CHIP 100 (1005)
R105	1-208-935-81	s RES, CHIP 100K (1005)
R106	1-208-935-81	s RES, CHIP 100K (1005)
R200	1-208-927-81	s RES, CHIP 47K (1005)
R201	1-208-935-81	s RES, CHIP 100K (1005)
R203	1-218-990-81	s CONDUCTOR, CHIP (1005)
R205	1-208-911-81	s RES, CHIP 10K (1005)
R206	1-208-927-81	s RES, CHIP 47K (1005)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R207	1-208-915-81	s RES, CHIP 15K (1005)
R208	1-208-887-81	s RES, CHIP 1.0K (1005)
R209	1-208-927-81	s RES, CHIP 47K (1005)
R210	1-208-911-81	s RES, CHIP 10K (1005)
R211	1-208-915-81	s RES, CHIP 15K (1005)
R212	1-208-935-81	s RES, CHIP 100K (1005)
R213	1-208-935-81	s RES, CHIP 100K (1005)
R214	1-208-927-81	s RES, CHIP 47K (1005)
R215	1-208-919-81	s RES, CHIP 22K (1005)
R216	1-208-935-81	s RES, CHIP 100K (1005)
R217	1-208-935-81	s RES, CHIP 100K (1005)
R218	1-208-935-81	s RES, CHIP 100K (1005)
R219	1-208-903-81	s RES, CHIP 4.7K (1005)
R220	1-208-903-81	s RES, CHIP 4.7K (1005)
R221	1-208-935-81	s RES, CHIP 100K (1005)
R222	1-208-927-81	s RES, CHIP 47K (1005)
R223	1-208-927-81	s RES, CHIP 47K (1005)
R228	1-208-935-81	s RES, CHIP 100K (1005)
R229	1-208-935-81	s RES, CHIP 100K (1005)
R230	1-208-935-81	s RES, CHIP 100K (1005)
R231	1-208-927-81	s RES, CHIP 47K (1005)
R233	1-208-919-81	s RES, CHIP 22K (1005)
R234	1-208-903-81	s RES, CHIP 4.7K (1005)
R235	1-208-903-81	s RES, CHIP 4.7K (1005)
R236	1-208-903-81	s RES, CHIP 4.7K (1005)
R237	1-208-887-81	s RES, CHIP 1.0K (1005)
R238	1-220-870-81	s RES, CHIP 10 (1005)
R240	1-208-927-81	s RES, CHIP 47K (1005)
R241	1-208-927-81	s RES, CHIP 47K (1005)
R242	1-208-919-81	s RES, CHIP 22K (1005)
R243	1-208-919-81	s RES, CHIP 22K (1005)
R244	1-220-870-81	s RES, CHIP 10 (1005)
R245	1-220-870-81	s RES, CHIP 10 (1005)
R246	1-208-887-81	s RES, CHIP 1.0K (1005)
R247	1-208-887-81	s RES, CHIP 1.0K (1005)
R248	1-208-887-81	s RES, CHIP 1.0K (1005)
R249	1-208-887-81	s RES, CHIP 1.0K (1005)
R251	1-218-990-81	s CONDUCTOR, CHIP (1005)
R254	1-208-863-81	s RES, CHIP 100 (1005)
R255	1-208-947-81	s RES, CHIP 330K (1005)
R256	1-208-943-81	s RES, CHIP 220K (1005)
R257	1-208-863-81	s RES, CHIP 100 (1005)
R258	1-208-863-81	s RES, CHIP 100 (1005)
R259	1-208-887-81	s RES, CHIP 1.0K (1005)
R261	1-208-903-81	s RES, CHIP 4.7K (1005)
R263	1-208-903-81	s RES, CHIP 4.7K (1005)
R265	1-208-903-81	s RES, CHIP 4.7K (1005)
R266	1-208-911-81	s RES, CHIP 10K (1005)
R267	1-208-903-81	s RES, CHIP 4.7K (1005)
R268	1-208-903-81	s RES, CHIP 4.7K (1005)
R269	1-208-903-81	s RES, CHIP 4.7K (1005)
R270	1-208-863-81	s RES, CHIP 100 (1005)
R271	1-208-863-81	s RES, CHIP 100 (1005)
R272	1-208-879-81	s RES, CHIP 470 (1005)
R273	1-208-863-81	s RES, CHIP 100 (1005)
R274	1-208-895-81	s RES, CHIP 2.2K (1005)
R275	1-208-943-81	s RES, CHIP 220K (1005)
R276	1-208-943-81	s RES, CHIP 220K (1005)
R277	1-208-919-81	s RES, CHIP 22K (1005)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R278	1-208-863-81	s RES, CHIP 100 (1005)
R279	1-208-863-81	s RES, CHIP 100 (1005)
R280	1-208-935-81	s RES, CHIP 100K (1005)
R282	1-220-870-81	s RES, CHIP 10 (1005)
R283	1-208-887-81	s RES, CHIP 1.0K (1005)
R284	1-208-943-81	s RES, CHIP 220K (1005)
R286	1-220-870-81	s RES, CHIP 10 (1005)
R287	1-220-870-81	s RES, CHIP 10 (1005)
R288	1-218-990-81	s CONDUCTOR, CHIP (1005)
R289	1-218-990-81	s CONDUCTOR, CHIP (1005)
R290	1-218-990-81	s CONDUCTOR, CHIP (1005)
R291	1-208-903-81	s RES, CHIP 4.7K (1005)
R293	1-218-990-81	s CONDUCTOR, CHIP (1005)
R294	1-208-903-81	s RES, CHIP 4.7K (1005)
R295	1-208-935-81	s RES, CHIP 100K (1005)
R297	1-208-903-81	s RES, CHIP 4.7K (1005)
R298	1-208-863-81	s RES, CHIP 100 (1005)
R299	1-208-887-81	s RES, CHIP 1.0K (1005)
R300	1-208-911-81	s RES, CHIP 10K (1005)
R303	1-218-990-81	s CONDUCTOR, CHIP (1005)
R309	1-218-990-81	s CONDUCTOR, CHIP (1005)
R312	1-208-855-81	s RES, CHIP 47 (1005)
R400	1-208-863-81	s RES, CHIP 100 (1005)
R401	1-208-863-81	s RES, CHIP 100 (1005)
R402	1-208-855-81	s RES, CHIP 47 (1005)
R403	1-208-855-81	s RES, CHIP 47 (1005)
R404	1-208-855-81	s RES, CHIP 47 (1005)
R406	1-208-855-81	s RES, CHIP 47 (1005)
R407	1-208-855-81	s RES, CHIP 47 (1005)
R408	1-208-943-81	s RES, CHIP 220K (1005)
R410	1-208-855-81	s RES, CHIP 47 (1005)
R414	1-208-863-81	s RES, CHIP 100 (1005)
R415	1-208-855-81	s RES, CHIP 47 (1005)
R416	1-208-855-81	s RES, CHIP 47 (1005)
R417	1-208-863-81	s RES, CHIP 100 (1005)
R418	1-208-943-81	s RES, CHIP 220K (1005)
R419	1-208-943-81	s RES, CHIP 220K (1005)
R420	1-208-855-81	s RES, CHIP 47 (1005)
R421	1-208-943-81	s RES, CHIP 220K (1005)
R425	1-208-855-81	s RES, CHIP 47 (1005)
R427	1-220-870-81	s RES, CHIP 10 (1005)
R500	1-208-863-81	s RES, CHIP 100 (1005)
R501	1-208-935-81	s RES, CHIP 100K (1005)
R502	1-208-863-81	s RES, CHIP 100 (1005)
R503	1-208-863-81	s RES, CHIP 100 (1005)
R504	1-208-863-81	s RES, CHIP 100 (1005)
R505	1-208-863-81	s RES, CHIP 100 (1005)
R506	1-208-943-81	s RES, CHIP 220K (1005)
R507	1-208-863-81	s RES, CHIP 100 (1005)
R508	1-208-935-81	s RES, CHIP 100K (1005)
R509	1-208-927-81	s RES, CHIP 47K (1005)
R510	1-208-935-81	s RES, CHIP 100K (1005)
R511	1-208-927-81	s RES, CHIP 47K (1005)
R512	1-208-863-81	s RES, CHIP 100 (1005)
R513	1-208-951-81	s RES, CHIP 470K (1005)
R514	1-208-951-81	s RES, CHIP 470K (1005)
R515	1-208-935-81	s RES, CHIP 100K (1005)
R516	1-208-863-81	s RES, CHIP 100 (1005)
R517	1-208-863-81	s RES, CHIP 100 (1005)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R518	1-208-911-81	s RES, CHIP 10K (1005)
R519	1-208-935-81	s RES, CHIP 100K (1005)
R520	1-208-935-81	s RES, CHIP 100K (1005)
R521	1-208-927-81	s RES, CHIP 47K (1005)
R522	1-208-911-81	s RES, CHIP 10K (1005)
R523	1-208-927-81	s RES, CHIP 47K (1005)
R524	1-208-927-81	s RES, CHIP 47K (1005)
R525	1-208-863-81	s RES, CHIP 100 (1005)
R526	1-220-870-81	s RES, CHIP 10 (1005)
R527	1-220-870-81	s RES, CHIP 10 (1005)
R600	1-208-855-81	s RES, CHIP 47 (1005)
R609	1-218-990-81	s CONDUCTOR, CHIP (1005)
R611	1-218-990-81	s CONDUCTOR, CHIP (1005)
R616	1-208-911-81	s RES, CHIP 10K (1005)
R617	1-208-911-81	s RES, CHIP 10K (1005)
R619	1-208-887-81	s RES, CHIP 1.0K (1005)
R620	1-208-911-81	s RES, CHIP 10K (1005)
R621	1-208-919-81	s RES, CHIP 22K (1005)
R622	1-208-891-81	s RES, CHIP 1.5K (1005)
R623	1-220-878-81	s RES, CHIP 22 (1005)
R624	1-220-878-81	s RES, CHIP 22 (1005)
R625	1-220-870-81	s RES, CHIP 10 (1005)
R626	1-208-855-81	s RES, CHIP 47 (1005)
R627	1-208-855-81	s RES, CHIP 47 (1005)
R629	1-208-863-81	s RES, CHIP 100 (1005)
R646	1-208-943-81	s RES, CHIP 220K (1005)
R648	1-208-863-81	s RES, CHIP 100 (1005)
R650	1-208-863-81	s RES, CHIP 100 (1005)
R651	1-208-863-81	s RES, CHIP 100 (1005)
R652	1-208-935-81	s RES, CHIP 100K (1005)
R656	1-218-990-81	s CONDUCTOR, CHIP (1005)
R657	1-218-990-81	s CONDUCTOR, CHIP (1005)
R658	1-218-990-81	s CONDUCTOR, CHIP (1005)
R661	1-218-990-81	s CONDUCTOR, CHIP (1005)
R662	1-218-990-81	s CONDUCTOR, CHIP (1005)
RB100	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB101	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB102	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB103	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB104	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB105	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB108	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB109	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB110	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB200	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB201	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB202	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB203	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB204	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB205	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB206	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB207	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB208	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB209	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB210	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB211	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB212	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB213	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB214	1-234-377-21	s RES, NETWORK 4.7K (1005X4)

(AT-177 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB215	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB216	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB217	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB300	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB301	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB402	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB403	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB404	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB406	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB407	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB408	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB409	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB410	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB411	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB412	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB413	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB414	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB415	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB416	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB417	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB418	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB419	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB420	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB421	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB500	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB602	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB603	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB607	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB609	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB610	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB611	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB612	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB613	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s RES, NETWORK 100 (1005X4)
S400	1-572-922-31	s SWITCH, SLIDE
S401	1-692-270-41	s SWITCH, SLIDE
S402	1-692-271-41	s SWITCH, SLIDE
THP600	1-803-353-21	s THERMISTOR, POSITIVE
TP200	1-535-757-21	s CHIP, CHECKER
X200	1-814-022-11	s OSCILLATOR, CRYSTAL (32MHZ)

AXM-38 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1545-896-A	s	MOUNTED CIRCUIT BOARD, AXM-38
C1	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C2	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C3	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C4	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C106	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C109	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C110	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C111	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C115	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C119	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C206	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C209	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C210	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C211	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C215	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C220	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
CN7	1-817-054-21	s	PIN, CONNECTOR 6P
CN101	1-573-594-23	s	CONNECTOR, XLR TYPE 3P
CN201	1-573-594-23	s	CONNECTOR, XLR TYPE 3P
CN302	1-774-795-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN403	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
D101	8-719-989-01	s	DIODE DA221-TL
D102	8-719-989-01	s	DIODE DA221-TL
D103	8-719-989-04	s	DIODE DAN222-TL
D201	8-719-989-01	s	DIODE DA221-TL
D202	8-719-989-01	s	DIODE DA221-TL
D203	8-719-989-04	s	DIODE DAN222-TL
D301	8-719-077-09	s	DIODE CL-196HR-CD-T

(AXM-38 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
FB101	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB201	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB303	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
IC101	6-704-931-01	s	IC MAX3281EAUT+T
IC102	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC103	8-759-422-21	s	IC NJM4580V(Te2)
IC104	8-759-675-54	s	IC TC7W53FK(Te85R)
IC201	6-704-931-01	s	IC MAX3281EAUT+T
IC202	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC203	8-759-422-21	s	IC NJM4580V(Te2)
IC204	8-759-675-54	s	IC TC7W53FK(Te85R)
L101	1-428-965-11	s	COIL, CHOKE (SMD)
L102	1-428-965-11	s	COIL, CHOKE (SMD)
L201	1-428-965-11	s	COIL, CHOKE (SMD)
L202	1-428-965-11	s	COIL, CHOKE (SMD)
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q102	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q103	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q104	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q105	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q106	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q202	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q203	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q204	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q205	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q206	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q401	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q402	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R101	1-208-943-81	s	RES, CHIP 220K (1005)
R102	1-208-943-81	s	RES, CHIP 220K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R107	1-208-915-81	s	RES, CHIP 15K (1005)
R108	1-208-872-81	s	RES, CHIP 240 (1005)
R109	1-208-872-81	s	RES, CHIP 240 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-208-943-81	s	RES, CHIP 220K (1005)
R113	1-208-911-81	s	RES, CHIP 10K (1005)
R114	1-208-911-81	s	RES, CHIP 10K (1005)
R115	1-208-899-81	s	RES, CHIP 3.3K (1005)
R116	1-208-899-81	s	RES, CHIP 3.3K (1005)
R117	1-208-899-81	s	RES, CHIP 3.3K (1005)
R118	1-208-899-81	s	RES, CHIP 3.3K (1005)
R119	1-208-923-81	s	RES, CHIP 33K (1005)
R120	1-208-879-81	s	RES, CHIP 470 (1005)
R121	1-208-879-81	s	RES, CHIP 470 (1005)
R122	1-208-879-81	s	RES, CHIP 470 (1005)
R123	1-218-863-91	s	RES, CHIP 4.7K (1608)
R124	1-218-855-91	s	RES, CHIP 2.2K (1608)
R125	1-218-855-91	s	RES, CHIP 2.2K (1608)
R126	1-218-863-91	s	RES, CHIP 4.7K (1608)
R127	1-208-943-81	s	RES, CHIP 220K (1005)
R128	1-208-891-81	s	RES, CHIP 1.5K (1005)

(AXM-38 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R129	1-208-863-81	s RES, CHIP 100 (1005)
R130	1-208-895-81	s RES, CHIP 2.2K (1005)
R131	1-208-891-81	s RES, CHIP 1.5K (1005)
R132	1-208-887-81	s RES, CHIP 1.0K (1005)
R133	1-208-899-81	s RES, CHIP 3.3K (1005)
R134	1-208-911-81	s RES, CHIP 10K (1005)
R135	1-208-911-81	s RES, CHIP 10K (1005)
R136	1-208-863-81	s RES, CHIP 100 (1005)
R137	1-208-863-81	s RES, CHIP 100 (1005)
R138	1-208-959-81	s RES, CHIP 1M (1005)
R139	1-208-863-81	s RES, CHIP 100 (1005)
R140	1-208-863-81	s RES, CHIP 100 (1005)
R141	1-208-959-81	s RES, CHIP 1M (1005)
R144	1-208-959-81	s RES, CHIP 1M (1005)
R146	1-208-883-81	s RES, CHIP 680 (1005)
R147	1-208-867-81	s RES, CHIP 150 (1005)
R148	1-208-959-81	s RES, CHIP 1M (1005)
R150	1-208-895-81	s RES, CHIP 2.2K (1005)
R151	1-208-883-81	s RES, CHIP 680 (1005)
R153	1-208-899-81	s RES, CHIP 3.3K (1005)
R154	1-208-899-81	s RES, CHIP 3.3K (1005)
R155	1-220-878-81	s RES, CHIP 22 (1005)
R201	1-208-943-81	s RES, CHIP 220K (1005)
R202	1-208-943-81	s RES, CHIP 220K (1005)
R203	1-218-990-81	s CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s CONDUCTOR, CHIP (1005)
R207	1-208-915-81	s RES, CHIP 15K (1005)
R208	1-208-872-81	s RES, CHIP 240 (1005)
R209	1-208-872-81	s RES, CHIP 240 (1005)
R210	1-218-990-81	s CONDUCTOR, CHIP (1005)
R212	1-208-943-81	s RES, CHIP 220K (1005)
R213	1-208-911-81	s RES, CHIP 10K (1005)
R214	1-208-911-81	s RES, CHIP 10K (1005)
R215	1-208-899-81	s RES, CHIP 3.3K (1005)
R216	1-208-899-81	s RES, CHIP 3.3K (1005)
R217	1-208-899-81	s RES, CHIP 3.3K (1005)
R218	1-208-899-81	s RES, CHIP 3.3K (1005)
R219	1-208-923-81	s RES, CHIP 33K (1005)
R220	1-208-879-81	s RES, CHIP 470 (1005)
R221	1-208-879-81	s RES, CHIP 470 (1005)
R222	1-208-879-81	s RES, CHIP 470 (1005)
R223	1-218-863-91	s RES, CHIP 4.7K (1608)
R224	1-218-855-91	s RES, CHIP 2.2K (1608)
R225	1-218-855-91	s RES, CHIP 2.2K (1608)
R226	1-218-863-91	s RES, CHIP 4.7K (1608)
R227	1-208-943-81	s RES, CHIP 220K (1005)
R228	1-208-891-81	s RES, CHIP 1.5K (1005)
R229	1-208-863-81	s RES, CHIP 100 (1005)
R230	1-208-895-81	s RES, CHIP 2.2K (1005)
R231	1-208-891-81	s RES, CHIP 1.5K (1005)
R232	1-208-887-81	s RES, CHIP 1.0K (1005)
R233	1-208-899-81	s RES, CHIP 3.3K (1005)
R234	1-208-911-81	s RES, CHIP 10K (1005)
R235	1-208-911-81	s RES, CHIP 10K (1005)
R236	1-208-863-81	s RES, CHIP 100 (1005)
R237	1-208-863-81	s RES, CHIP 100 (1005)
R238	1-208-959-81	s RES, CHIP 1M (1005)
R239	1-208-863-81	s RES, CHIP 100 (1005)
R240	1-208-863-81	s RES, CHIP 100 (1005)

(AXM-38 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R241	1-208-959-81	s RES, CHIP 1M (1005)
R244	1-208-959-81	s RES, CHIP 1M (1005)
R246	1-208-883-81	s RES, CHIP 680 (1005)
R247	1-208-867-81	s RES, CHIP 150 (1005)
R248	1-208-959-81	s RES, CHIP 1M (1005)
R250	1-208-895-81	s RES, CHIP 2.2K (1005)
R251	1-208-883-81	s RES, CHIP 680 (1005)
R253	1-208-899-81	s RES, CHIP 3.3K (1005)
R254	1-208-899-81	s RES, CHIP 3.3K (1005)
R255	1-220-878-81	s RES, CHIP 22 (1005)
R302	1-218-990-81	s CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s CONDUCTOR, CHIP (1005)
R401	1-208-911-81	s RES, CHIP 10K (1005)
R402	1-208-899-81	s RES, CHIP 3.3K (1005)
R403	1-208-919-81	s RES, CHIP 22K (1005)
R404	1-208-911-81	s RES, CHIP 10K (1005)
R405	1-208-899-81	s RES, CHIP 3.3K (1005)
R406	1-208-919-81	s RES, CHIP 22K (1005)
R415	1-208-855-81	s RES, CHIP 47 (1005)
R416	1-208-855-81	s RES, CHIP 47 (1005)
S101	1-572-042-11	s SWITCH, SLIDE
S201	1-572-042-11	s SWITCH, SLIDE
S203	1-786-333-21	s SWITCH, SLIDE (SMD)

AXM-38 BOARD (suffix 13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1545-896-A	s	MOUNTED CIRCUIT BOARD, AXM-38
C1	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C2	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C3	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C4	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C106	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C109	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C110	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C111	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C115	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C116	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C119	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C120	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C206	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C209	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C210	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C211	1-126-405-21	s	CAP, CHIP ELECT 10MF (6.3X5.7)
C212	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C215	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C219	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
C220	1-114-214-81	s	CAP,CHIP CERAMIC470PF CH1005
CN1	1-817-054-21	s	PIN, CONNECTOR 6P
CN7	1-817-054-21	s	PIN, CONNECTOR 6P
CN101	1-573-594-23	s	CONNECTOR, XLR TYPE 3P
CN201	1-573-594-23	s	CONNECTOR, XLR TYPE 3P
CN302	1-774-795-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN403	1-778-650-31	s	CONNECTOR, FFC/FPC(ZIF) ST 30P
D101	8-719-989-01	s	DIODE DA221-TL
D102	8-719-989-01	s	DIODE DA221-TL
D103	8-719-989-04	s	DIODE DAN222-TL
D201	8-719-989-01	s	DIODE DA221-TL
D202	8-719-989-01	s	DIODE DA221-TL

(AXM-38 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
D203	8-719-989-04	s	DIODE DAN222-TL
D301	8-719-077-09	s	DIODE CL-196HR-CD-T
FB101	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB201	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB303	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
IC101	6-704-931-01	s	IC MAX3281EAUT+T
IC102	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC103	8-759-422-21	s	IC NJM4580V(TE2)
IC104	8-759-675-54	s	IC TC7W53FK(TE85R)
IC201	6-704-931-01	s	IC MAX3281EAUT+T
IC202	6-706-489-01	s	IC TC7SH32FU(T5RSOYJF)
IC203	8-759-422-21	s	IC NJM4580V(TE2)
IC204	8-759-675-54	s	IC TC7W53FK(TE85R)
L101	1-428-965-11	s	COIL, CHOKE (SMD)
L102	1-428-965-11	s	COIL, CHOKE (SMD)
L201	1-428-965-11	s	COIL, CHOKE (SMD)
L202	1-428-965-11	s	COIL, CHOKE (SMD)
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q102	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q103	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q104	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q105	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q106	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q202	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q203	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q204	8-729-202-14	s	TRANSISTOR 2SC2713G-TE85L
Q205	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q206	8-729-012-36	s	TRANSISTOR 2SK711-BL/V-TE85L
Q401	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q402	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q408	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q409	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R101	1-208-943-81	s	RES, CHIP 220K (1005)
R102	1-208-943-81	s	RES, CHIP 220K (1005)
R103	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R104	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R107	1-208-915-81	s	RES, CHIP 15K (1005)
R108	1-208-872-81	s	RES, CHIP 240 (1005)
R109	1-208-872-81	s	RES, CHIP 240 (1005)
R110	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R112	1-208-943-81	s	RES, CHIP 220K (1005)
R113	1-208-911-81	s	RES, CHIP 10K (1005)
R114	1-208-911-81	s	RES, CHIP 10K (1005)
R115	1-208-899-81	s	RES, CHIP 3.3K (1005)
R116	1-208-899-81	s	RES, CHIP 3.3K (1005)
R117	1-208-899-81	s	RES, CHIP 3.3K (1005)
R118	1-208-899-81	s	RES, CHIP 3.3K (1005)
R119	1-208-923-81	s	RES, CHIP 33K (1005)
R120	1-208-879-81	s	RES, CHIP 470 (1005)
R121	1-208-879-81	s	RES, CHIP 470 (1005)
R122	1-208-879-81	s	RES, CHIP 470 (1005)
R123	1-218-863-91	s	RES, CHIP 4.7K (1608)
R124	1-218-855-91	s	RES, CHIP 2.2K (1608)
R125	1-218-855-91	s	RES, CHIP 2.2K (1608)
R126	1-218-863-91	s	RES, CHIP 4.7K (1608)

(AXM-38 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R127	1-208-943-81	s RES, CHIP 220K (1005)
R128	1-208-891-81	s RES, CHIP 1.5K (1005)
R129	1-208-863-81	s RES, CHIP 100 (1005)
R130	1-208-895-81	s RES, CHIP 2.2K (1005)
R131	1-208-891-81	s RES, CHIP 1.5K (1005)
R132	1-208-887-81	s RES, CHIP 1.0K (1005)
R133	1-208-899-81	s RES, CHIP 3.3K (1005)
R134	1-208-911-81	s RES, CHIP 10K (1005)
R135	1-208-911-81	s RES, CHIP 10K (1005)
R136	1-208-863-81	s RES, CHIP 100 (1005)
R137	1-208-863-81	s RES, CHIP 100 (1005)
R138	1-208-959-81	s RES, CHIP 1M (1005)
R139	1-208-863-81	s RES, CHIP 100 (1005)
R140	1-208-863-81	s RES, CHIP 100 (1005)
R141	1-208-959-81	s RES, CHIP 1M (1005)
R144	1-208-959-81	s RES, CHIP 1M (1005)
R146	1-208-883-81	s RES, CHIP 680 (1005)
R147	1-208-867-81	s RES, CHIP 150 (1005)
R148	1-208-959-81	s RES, CHIP 1M (1005)
R150	1-208-895-81	s RES, CHIP 2.2K (1005)
R151	1-208-883-81	s RES, CHIP 680 (1005)
R153	1-208-899-81	s RES, CHIP 3.3K (1005)
R154	1-208-899-81	s RES, CHIP 3.3K (1005)
R155	1-220-878-81	s RES, CHIP 22 (1005)
R201	1-208-943-81	s RES, CHIP 220K (1005)
R202	1-208-943-81	s RES, CHIP 220K (1005)
R203	1-218-990-81	s CONDUCTOR, CHIP (1005)
R204	1-218-990-81	s CONDUCTOR, CHIP (1005)
R207	1-208-915-81	s RES, CHIP 15K (1005)
R208	1-208-872-81	s RES, CHIP 240 (1005)
R209	1-208-872-81	s RES, CHIP 240 (1005)
R210	1-218-990-81	s CONDUCTOR, CHIP (1005)
R212	1-208-943-81	s RES, CHIP 220K (1005)
R213	1-208-911-81	s RES, CHIP 10K (1005)
R214	1-208-911-81	s RES, CHIP 10K (1005)
R215	1-208-899-81	s RES, CHIP 3.3K (1005)
R216	1-208-899-81	s RES, CHIP 3.3K (1005)
R217	1-208-899-81	s RES, CHIP 3.3K (1005)
R218	1-208-899-81	s RES, CHIP 3.3K (1005)
R219	1-208-923-81	s RES, CHIP 33K (1005)
R220	1-208-879-81	s RES, CHIP 470 (1005)
R221	1-208-879-81	s RES, CHIP 470 (1005)
R222	1-208-879-81	s RES, CHIP 470 (1005)
R223	1-218-863-91	s RES, CHIP 4.7K (1608)
R224	1-218-855-91	s RES, CHIP 2.2K (1608)
R225	1-218-855-91	s RES, CHIP 2.2K (1608)
R226	1-218-863-91	s RES, CHIP 4.7K (1608)
R227	1-208-943-81	s RES, CHIP 220K (1005)
R228	1-208-891-81	s RES, CHIP 1.5K (1005)
R229	1-208-863-81	s RES, CHIP 100 (1005)
R230	1-208-895-81	s RES, CHIP 2.2K (1005)
R231	1-208-891-81	s RES, CHIP 1.5K (1005)
R232	1-208-887-81	s RES, CHIP 1.0K (1005)
R233	1-208-899-81	s RES, CHIP 3.3K (1005)
R234	1-208-911-81	s RES, CHIP 10K (1005)
R235	1-208-911-81	s RES, CHIP 10K (1005)
R236	1-208-863-81	s RES, CHIP 100 (1005)
R237	1-208-863-81	s RES, CHIP 100 (1005)
R238	1-208-959-81	s RES, CHIP 1M (1005)

(AXM-38 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R239	1-208-863-81	s RES, CHIP 100 (1005)
R240	1-208-863-81	s RES, CHIP 100 (1005)
R241	1-208-959-81	s RES, CHIP 1M (1005)
R244	1-208-959-81	s RES, CHIP 1M (1005)
R246	1-208-883-81	s RES, CHIP 680 (1005)
R247	1-208-867-81	s RES, CHIP 150 (1005)
R248	1-208-959-81	s RES, CHIP 1M (1005)
R250	1-208-895-81	s RES, CHIP 2.2K (1005)
R251	1-208-883-81	s RES, CHIP 680 (1005)
R253	1-208-899-81	s RES, CHIP 3.3K (1005)
R254	1-208-899-81	s RES, CHIP 3.3K (1005)
R255	1-220-878-81	s RES, CHIP 22 (1005)
R302	1-218-990-81	s CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s CONDUCTOR, CHIP (1005)
R401	1-208-911-81	s RES, CHIP 10K (1005)
R402	1-208-899-81	s RES, CHIP 3.3K (1005)
R403	1-208-919-81	s RES, CHIP 22K (1005)
R404	1-208-911-81	s RES, CHIP 10K (1005)
R405	1-208-899-81	s RES, CHIP 3.3K (1005)
R406	1-208-919-81	s RES, CHIP 22K (1005)
R415	1-208-855-81	s RES, CHIP 47 (1005)
R416	1-208-855-81	s RES, CHIP 47 (1005)
S101	1-572-042-11	s SWITCH, SLIDE
S201	1-572-042-11	s SWITCH, SLIDE
S203	1-786-333-21	s SWITCH, SLIDE (SMD)

CI-37 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-087-A	s MOUNTED CIRCUIT BOARD, CI-37
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C12	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C16	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C17	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C18	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C20	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C21	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C22	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
CN1	1-764-243-31	o CONNECTOR (COAXIAL)
CN2	1-764-243-31	o CONNECTOR (COAXIAL)
CN3	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
FB1	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB2	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB3	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB4	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB5	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB6	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB7	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB8	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB9	1-400-834-21	s FERRITE, EMI (SMD) (1005)
IC1	8-759-392-77	s IC SN74LVC245APWR
IC2	8-759-392-77	s IC SN74LVC245APWR
IC3	8-759-183-53	s IC TL431CPK-E2
IC4	6-711-946-01	s IC GS1528BCKAE3
IC5	6-711-946-01	s IC GS1528BCKAE3
L1	1-414-838-21	s INDUCTOR, CHIP 6.8NH (1005)
L2	1-414-838-21	s INDUCTOR, CHIP 6.8NH (1005)
L3	1-414-838-21	s INDUCTOR, CHIP 6.8NH (1005)
R1	1-208-860-81	s RES, CHIP 75 (1005)
R2	1-208-887-81	s RES, CHIP 1.0K (1005)
R3	1-208-883-81	s RES, CHIP 680 (1005)
R4	1-208-860-81	s RES, CHIP 75 (1005)
R5	1-208-860-81	s RES, CHIP 75 (1005)
R6	1-208-860-81	s RES, CHIP 75 (1005)
R7	1-208-860-81	s RES, CHIP 75 (1005)
R8	1-208-860-81	s RES, CHIP 75 (1005)
R9	1-208-860-81	s RES, CHIP 75 (1005)
R10	1-208-860-81	s RES, CHIP 75 (1005)
R11	1-208-883-81	s RES, CHIP 680 (1005)
R12	1-208-860-81	s RES, CHIP 75 (1005)
R13	1-208-860-81	s RES, CHIP 75 (1005)
R14	1-208-860-81	s RES, CHIP 75 (1005)
R15	1-208-860-81	s RES, CHIP 75 (1005)
R16	1-208-860-81	s RES, CHIP 75 (1005)
R17	1-208-903-81	s RES, CHIP 4.7K (1005)
R18	1-208-887-81	s RES, CHIP 1.0K (1005)
RB1	1-234-381-21	s RES, NETWORK 100K (1005X4)

(CI-37 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB2	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB3	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB4	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB5	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB6	1-234-381-21	s RES, NETWORK 100K (1005X4)

CN-2946 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-881-A	s MOUNTED CIRCUIT BOARD, CN-2946
C1	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C6	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-816-562-31	s CONNECTOR, FFC/FPC(ZIF) ST 36P
CN2	1-815-187-11	s JACK, MODULAR
D1	8-719-077-09	s DIODE CL-196HR-CD-T
E1	1-535-757-21	s CHIP, CHECKER
E2	1-535-757-21	s CHIP, CHECKER
FB1	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB2	1-469-379-21	s FERRITE, EMI (SMD) (2012)
R2	1-208-895-81	s RES, CHIP 2.2K (1005)
R12	1-220-878-81	s RES, CHIP 22 (1005)
R13	1-220-878-81	s RES, CHIP 22 (1005)
R14	1-220-878-81	s RES, CHIP 22 (1005)
R15	1-220-878-81	s RES, CHIP 22 (1005)
R16	1-220-878-81	s RES, CHIP 22 (1005)
R17	1-218-990-81	s CONDUCTOR, CHIP (1005)
R21	1-208-903-81	s RES, CHIP 4.7K (1005)
R22	1-208-869-81	s RES, CHIP 180 (1005)
R23	1-208-856-81	s RES, CHIP 51 (1005)
R24	1-208-856-81	s RES, CHIP 51 (1005)
R25	1-208-856-81	s RES, CHIP 51 (1005)
R26	1-208-856-81	s RES, CHIP 51 (1005)
R27	1-208-875-81	s RES, CHIP 330 (1005)
R28	1-208-875-81	s RES, CHIP 330 (1005)
R30	1-208-895-81	s RES, CHIP 2.2K (1005)
R31	1-208-895-81	s RES, CHIP 2.2K (1005)
R33	1-208-891-81	s RES, CHIP 1.5K (1005)
RB1	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s RES, NETWORK 22 (1005X4)
S1	1-570-608-11	s SWITCH, TOGGLE
X1	1-813-052-21	s VIBRATOR, CRYSTAL (25 MHz)

CN-2947 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1539-040-A	s MOUNTED CIRCUIT BOARD, CN-2947
CN1	1-793-093-91	o CONNECTOR, BOARD TO BOARD 60P
CN2	1-793-093-91	o CONNECTOR, BOARD TO BOARD 60P

CN-2948 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-123-A	s MOUNTED CIRCUIT BOARD, CN-2948
2pcs	3-729-076-11	s SCREW (+B) (2X4)
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-793-304-12	s SQUARE-BUILT CONNECTOR(1394)
CN2	1-691-591-21	o PIN, CONNECTOR (1.5MM) (SMD)8P
L1	1-457-324-21	s COIL, CHOKE
R1	1-218-989-81	s RES, CHIP 1M

CN-3001 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-095-A	s MOUNTED CIRCUIT BOARD, CN-3001
C1	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C2	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C3	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C4	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C5	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C6	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C7	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C8	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
CN1	1-784-602-11	s CONNECTOR, XLR (RECEPTACLE) 5P
CN2	1-573-768-21	s PIN, CONNECTOR (1.5MM) (SMD)5P
FB1	1-400-461-21	s FERRITE, EMI (SMD) (1005)
L1	1-428-965-11	s COIL, CHOKE (SMD)
L2	1-428-965-11	s COIL, CHOKE (SMD)

CN-3005 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-118-A	s MOUNTED CIRCUIT BOARD, CN-3005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C8	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C11	1-115-340-91	s CAP, CERAMIC 0.22MF B (2012)
C16	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C17	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C18	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
C19	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
CN1	1-779-992-21	s PIN, CONNECTOR (PWB) 8P
CN2	1-691-550-21	s PIN, CONNECTOR (1.5MM) (SMD) 3P
CN3	1-695-320-21	o PIN, CONNECTOR (1.5MM) (SMD) 2P
CN4	1-764-250-21	o PIN, CONNECTOR (PC BOARD) 4P
CN5	1-764-250-21	o PIN, CONNECTOR (PC BOARD) 4P
CN6	1-770-469-21	s PIN, CONNECTOR (PC BOARD) 2P
D5	8-719-989-04	s DIODE DAN222-TL
D6	8-719-083-83	s DIODE UDZSNPTE-1715B
FL2	1-234-859-11	s FILTER, EMI REMOVAL
FL3	1-234-859-11	s FILTER, EMI REMOVAL
FL4	1-234-859-11	s FILTER, EMI REMOVAL
FL5	1-234-859-11	s FILTER, EMI REMOVAL
FL6	1-234-859-11	s FILTER, EMI REMOVAL
FL7	1-234-859-11	s FILTER, EMI REMOVAL
FL8	1-234-859-11	s FILTER, EMI REMOVAL
IC1	6-704-894-01	s IC PCA9554BS-118
IC2	6-710-018-01	s IC CAT24C02WI-GT3
IC3	8-759-436-53	s IC LTC1153CS8-E2
Q20	6-550-697-01	s TRANSISTOR HAT2164H-EL-E
R1	1-208-887-81	s RES, CHIP 1.0K (1005)
R2	1-208-887-81	s RES, CHIP 1.0K (1005)
R5	1-208-855-81	s RES, CHIP 47 (1005)
R15	1-208-903-81	s RES, CHIP 4.7K (1005)
R16	1-208-863-81	s RES, CHIP 100 (1005)
R17	1-208-863-81	s RES, CHIP 100 (1005)
R18	1-208-863-81	s RES, CHIP 100 (1005)
R19	1-208-863-81	s RES, CHIP 100 (1005)
R20	1-208-935-81	s RES, CHIP 100K (1005)
R21	1-208-935-81	s RES, CHIP 100K (1005)
R33	1-208-919-81	s RES, CHIP 22K (1005)
R37	1-219-610-21	s RES, CHIP (SQUARE TYPE) 0.022

CN-3025 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-098-A	s MOUNTED CIRCUIT BOARD, CN-3025
1pc	1-569-621-11	o HOUSING, CONNECTOR 12P
C1	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C2	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C4	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C5	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C7	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C8	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C9	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
C10	1-115-416-91	s CAP,CHIP CERAMIC1000PF CH 1608
CN2	1-562-221-31	s CONNECTOR (ROUND TYPE) (R-F)12P
FB1	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB4	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB5	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB7	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB8	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB9	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB10	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB11	1-469-108-21	s FERRITE, EMI (SMD) (1608)
FB12	1-469-108-21	s FERRITE, EMI (SMD) (1608)
FL1	1-234-859-11	s FILTER, EMI REMOVAL
FL2	1-234-859-11	s FILTER, EMI REMOVAL
JC1	1-216-864-91	s CONDUCTOR, CHIP (1608)

CN-3026 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-099-A	s MOUNTED CIRCUIT BOARD, CN-3026
1pc	1-966-080-11	s HARNESS, SUB (USB-5)
C1	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C2	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C3	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C4	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C5	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN2	1-817-109-11	s CONNECTOR, USB (A)
D1	6-500-701-01	s DIODE PGB1010603NR
D2	6-500-701-01	s DIODE PGB1010603NR
D3	6-500-701-01	s DIODE PGB1010603NR
FB1	1-469-379-21	s FERRITE, EMI (SMD) (2012)
R1	1-208-959-81	s RES, CHIP 1M (1005)

CNB-25 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-882-A	s MOUNTED CIRCUIT BOARD, CNB-25
1pc	2-534-514-02	o SUPPORT (1)
1pc	7-621-775-08	s SCREW +B 2.6X3
C1	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C8	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C9	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C10	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C11	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C12	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C13	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C14	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C15	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C16	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C17	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C18	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C19	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C20	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C21	1-126-400-21	s CAP, CHIP ELECT 22MF(6.3X5.7)
C22	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C23	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C25	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C26	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C27	1-112-320-51	s CAP, ELECT 220MF
C28	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C29	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C30	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C31	1-112-320-51	s CAP, ELECT 220MF
C32	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C33	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C34	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C35	1-112-319-11	s CAP, ELECT 4700MF
C36	1-114-236-21	s CAP, CERAMIC 22MF B (3225)
C37	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C38	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C39	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C40	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C41	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C42	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C43	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C44	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C45	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C46	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C90	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C200	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C201	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C202	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C204	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C205	1-104-652-91	s CAP, ELECT 470MF
C206	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-104-652-91	s CAP, ELECT 470MF

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C208	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-104-652-91	s CAP, ELECT 470MF
C210	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-104-652-91	s CAP, ELECT 470MF
C212	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C224	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C226	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C227	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C228	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C229	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C230	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C231	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C232	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C235	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C236	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C238	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C239	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C300	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C301	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C302	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C303	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C305	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C306	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C307	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C308	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C309	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C317	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
CN2	1-770-470-21	o PIN, CONNECTOR (PC BOARD) 6P
CN3	1-816-296-21	s PIN, CONNECTOR (PC BOARD) 9P
CN4	1-770-469-21	s PIN, CONNECTOR (PC BOARD) 2P
CN5	1-785-728-21	s PIN (PC BOARD), CONNECTOR 7P
CN6	1-779-804-21	s CONNECTOR, BOARD TO BOARD 30P
CN7	1-778-650-31	s CONNECTOR, FFC/FPC(ZIF) ST 30P
CN8	1-784-254-21	s CONNECTOR 10P
D1	8-719-991-01	s DIODE DAP222-TL
D2	8-719-072-43	s DIODE RB050L-40TE25
D3	8-719-072-43	s DIODE RB050L-40TE25
D4	8-719-991-01	s DIODE DAP222-TL
D5	8-719-991-01	s DIODE DAP222-TL
D6	8-719-077-09	s DIODE CL-196HR-CD-T
D7	8-719-077-09	s DIODE CL-196HR-CD-T
D8	8-719-077-09	s DIODE CL-196HR-CD-T
D9	6-501-124-01	s DIODE RSX101VA-30TR
D10	8-719-989-04	s DIODE DAN222-TL
D11	8-719-989-04	s DIODE DAN222-TL
D12	8-719-991-01	s DIODE DAP222-TL
D13	8-719-991-01	s DIODE DAP222-TL
D14	8-719-989-04	s DIODE DAN222-TL

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D15	6-501-124-01	s	DIODE RSX101VA-30TR
D16	8-719-989-04	s	DIODE DAN222-TL
D200	8-719-989-01	s	DIODE DA221-TL
D201	8-719-989-01	s	DIODE DA221-TL
D202	8-719-989-01	s	DIODE DA221-TL
D203	8-719-989-01	s	DIODE DA221-TL
D300	8-719-083-59	s	DIODE UDZSNPTE-174.3B
D301	8-719-083-59	s	DIODE UDZSNPTE-174.3B
D302	8-719-083-59	s	DIODE UDZSNPTE-174.3B
D303	8-719-991-01	s	DIODE DAP222-TL
FB1	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB3	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB4	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB5	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB6	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB8	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
IC1	6-808-309-01	s	IC EPM3032ATC44-CN25-V10
IC2	6-702-879-01	s	IC R3112N281A-TR-FA
IC3	6-706-488-01	s	IC TC7SH14FU(T5RSOYJF)
IC4	6-710-067-01	s	IC LT1933ES6#TR
IC5	8-759-588-01	s	IC LTC1473CGN-E2
IC6	6-709-322-01	s	IC TC7WH123FK(TE85R)
IC18	8-759-273-87	s	IC NJM2901V(TE2)
IC200	8-759-194-97	s	IC NJM4560M-D(TE2)
IC201	8-759-194-97	s	IC NJM4560M-D(TE2)
IC202	6-702-481-01	s	IC PCA9555DB-118
IC301	8-759-185-42	s	IC LM4040AIM3-2.5
IC304	8-759-327-01	s	IC NJM062V(TE2)
IC305	8-759-327-01	s	IC NJM062V(TE2)
L1	1-414-406-41	s	INDUCTOR (SMD) 220.0UH
L2	1-414-854-41	s	INDUCTOR (SMD) 1000.0UH
L3	1-469-555-21	s	INDUCTOR, CHIP 10UH (LB2016)
L4	1-416-919-21	s	COIL, CHOKE 150UH
L5	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L10	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L200	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L201	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q2	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q3	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q4	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q5	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q6	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q7	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q8	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q9	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q10	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q11	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q12	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q13	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q14	6-551-266-01	s	TRANSISTOR SI2304BDS-T1
Q15	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q16	6-550-697-01	s	TRANSISTOR HAT2164H-EL-E
Q17	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q200	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q201	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q202	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q203	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q211	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q212	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q214	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q215	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q216	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q217	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q218	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q219	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q220	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q221	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q222	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q300	8-729-054-35	s	TRANSISTOR HAT2070R-EL
Q301	8-729-053-97	s	TRANSISTOR 2SB1449R/S-DL
Q302	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
R1	1-208-935-81	s	RES, CHIP 100K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-935-81	s	RES, CHIP 100K (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-915-81	s	RES, CHIP 15K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-919-81	s	RES, CHIP 22K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R10	1-208-917-81	s	RES, CHIP 18K (1005)
R11	1-208-919-81	s	RES, CHIP 22K (1005)
R12	1-208-919-81	s	RES, CHIP 22K (1005)
R13	1-208-911-81	s	RES, CHIP 10K (1005)
R14	1-208-887-81	s	RES, CHIP 1.0K (1005)
R15	1-208-887-81	s	RES, CHIP 1.0K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R17	1-208-887-81	s	RES, CHIP 1.0K (1005)
R18	1-208-863-81	s	RES, CHIP 100 (1005)
R19	1-208-923-81	s	RES, CHIP 33K (1005)
R20	1-208-919-81	s	RES, CHIP 22K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R22	1-208-903-81	s	RES, CHIP 4.7K (1005)
R23	1-208-919-81	s	RES, CHIP 22K (1005)
R24	1-208-887-81	s	RES, CHIP 1.0K (1005)
R25	1-208-917-81	s	RES, CHIP 18K (1005)
R26	1-208-891-81	s	RES, CHIP 1.5K (1005)
R27	1-208-891-81	s	RES, CHIP 1.5K (1005)
R28	1-208-911-81	s	RES, CHIP 10K (1005)
R29	1-208-911-81	s	RES, CHIP 10K (1005)
R30	1-208-887-81	s	RES, CHIP 1.0K (1005)
R31	1-208-887-81	s	RES, CHIP 1.0K (1005)
R32	1-208-891-81	s	RES, CHIP 1.5K (1005)
R33	1-208-863-81	s	RES, CHIP 100 (1005)
R34	1-208-863-81	s	RES, CHIP 100 (1005)
R35	1-208-887-81	s	RES, CHIP 1.0K (1005)
R36	1-208-927-81	s	RES, CHIP 47K (1005)
R37	1-208-863-81	s	RES, CHIP 100 (1005)
R38	1-208-863-81	s	RES, CHIP 100 (1005)
R39	1-208-887-81	s	RES, CHIP 1.0K (1005)
R40	1-208-887-81	s	RES, CHIP 1.0K (1005)
R41	1-208-863-81	s	RES, CHIP 100 (1005)
R42	1-208-863-81	s	RES, CHIP 100 (1005)
R43	1-208-887-81	s	RES, CHIP 1.0K (1005)
R44	1-208-887-81	s	RES, CHIP 1.0K (1005)

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R45	1-208-919-81	s RES, CHIP 22K (1005)
R46	1-208-919-81	s RES, CHIP 22K (1005)
R47	1-208-907-81	s RES, CHIP 6.8K (1005)
R48	1-208-887-81	s RES, CHIP 1.0K (1005)
R49	1-208-915-81	s RES, CHIP 15K (1005)
R50	1-208-891-81	s RES, CHIP 1.5K (1005)
R51	1-208-907-81	s RES, CHIP 6.8K (1005)
R52	1-208-911-81	s RES, CHIP 10K (1005)
R53	1-208-935-81	s RES, CHIP 100K (1005)
R54	1-208-911-81	s RES, CHIP 10K (1005)
R55	1-208-919-81	s RES, CHIP 22K (1005)
R56	1-208-911-81	s RES, CHIP 10K (1005)
R57	1-208-919-81	s RES, CHIP 22K (1005)
R58	1-208-887-81	s RES, CHIP 1.0K (1005)
R59	1-208-887-81	s RES, CHIP 1.0K (1005)
R60	1-208-887-81	s RES, CHIP 1.0K (1005)
R61	1-208-903-81	s RES, CHIP 4.7K (1005)
R62	1-208-935-81	s RES, CHIP 100K (1005)
R63	1-208-887-81	s RES, CHIP 1.0K (1005)
R64	1-208-879-81	s RES, CHIP 470 (1005)
R65	1-208-903-81	s RES, CHIP 4.7K (1005)
R66	1-208-915-81	s RES, CHIP 15K (1005)
R67	1-208-915-81	s RES, CHIP 15K (1005)
R68	1-208-911-81	s RES, CHIP 10K (1005)
R69	1-208-911-81	s RES, CHIP 10K (1005)
R70	1-219-611-21	s RES, CHIP (SQUARE TYPE) 0.047
R71	1-219-611-21	s RES, CHIP (SQUARE TYPE) 0.047
R72	1-219-611-21	s RES, CHIP (SQUARE TYPE) 0.047
R74	1-208-863-81	s RES, CHIP 100 (1005)
R75	1-208-935-81	s RES, CHIP 100K (1005)
R76	1-208-935-81	s RES, CHIP 100K (1005)
R77	1-208-935-81	s RES, CHIP 100K (1005)
R78	1-208-863-81	s RES, CHIP 100 (1005)
R79	1-208-959-81	s RES, CHIP 1M (1005)
R80	1-208-951-81	s RES, CHIP 470K (1005)
R81	1-208-887-81	s RES, CHIP 1.0K (1005)
R82	1-208-887-81	s RES, CHIP 1.0K (1005)
R83	1-208-931-81	s RES, CHIP 68K (1005)
R84	1-208-931-81	s RES, CHIP 68K (1005)
R85	1-208-947-81	s RES, CHIP 330K (1005)
R86	1-208-887-81	s RES, CHIP 1.0K (1005)
R87	1-208-927-81	s RES, CHIP 47K (1005)
R88	1-208-887-81	s RES, CHIP 1.0K (1005)
R89	1-208-911-81	s RES, CHIP 10K (1005)
R202	1-208-903-81	s RES, CHIP 4.7K (1005)
R203	1-208-915-81	s RES, CHIP 15K (1005)
R204	1-208-903-81	s RES, CHIP 4.7K (1005)
R205	1-208-903-81	s RES, CHIP 4.7K (1005)
R206	1-208-923-81	s RES, CHIP 33K (1005)
R207	1-208-907-81	s RES, CHIP 6.8K (1005)
R208	1-208-907-81	s RES, CHIP 6.8K (1005)
R209	1-208-903-81	s RES, CHIP 4.7K (1005)
R210	1-208-903-81	s RES, CHIP 4.7K (1005)
R211	1-208-903-81	s RES, CHIP 4.7K (1005)
R212	1-208-923-81	s RES, CHIP 33K (1005)
R213	1-208-903-81	s RES, CHIP 4.7K (1005)
R214	1-208-903-81	s RES, CHIP 4.7K (1005)
R215	1-208-923-81	s RES, CHIP 33K (1005)
R216	1-208-903-81	s RES, CHIP 4.7K (1005)

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R217	1-208-903-81	s RES, CHIP 4.7K (1005)
R218	1-208-903-81	s RES, CHIP 4.7K (1005)
R219	1-208-903-81	s RES, CHIP 4.7K (1005)
R220	1-208-887-81	s RES, CHIP 1.0K (1005)
R221	1-208-887-81	s RES, CHIP 1.0K (1005)
R222	1-208-919-81	s RES, CHIP 22K (1005)
R223	1-208-887-81	s RES, CHIP 1.0K (1005)
R224	1-208-887-81	s RES, CHIP 1.0K (1005)
R225	1-208-923-81	s RES, CHIP 33K (1005)
R226	1-208-855-81	s RES, CHIP 47 (1005)
R227	1-208-915-81	s RES, CHIP 15K (1005)
R228	1-218-990-81	s CONDUCTOR, CHIP (1005)
R229	1-218-990-81	s CONDUCTOR, CHIP (1005)
R230	1-208-919-81	s RES, CHIP 22K (1005)
R231	1-208-919-81	s RES, CHIP 22K (1005)
R232	1-208-855-81	s RES, CHIP 47 (1005)
R233	1-208-915-81	s RES, CHIP 15K (1005)
R234	1-208-907-81	s RES, CHIP 6.8K (1005)
R235	1-208-907-81	s RES, CHIP 6.8K (1005)
R236	1-208-915-81	s RES, CHIP 15K (1005)
R237	1-218-990-81	s CONDUCTOR, CHIP (1005)
R238	1-218-990-81	s CONDUCTOR, CHIP (1005)
R239	1-208-855-81	s RES, CHIP 47 (1005)
R240	1-208-919-81	s RES, CHIP 22K (1005)
R241	1-208-919-81	s RES, CHIP 22K (1005)
R242	1-208-855-81	s RES, CHIP 47 (1005)
R243	1-208-935-81	s RES, CHIP 100K (1005)
R244	1-208-887-81	s RES, CHIP 1.0K (1005)
R245	1-208-887-81	s RES, CHIP 1.0K (1005)
R246	1-208-935-81	s RES, CHIP 100K (1005)
R247	1-208-887-81	s RES, CHIP 1.0K (1005)
R248	1-208-887-81	s RES, CHIP 1.0K (1005)
R249	1-208-935-81	s RES, CHIP 100K (1005)
R251	1-208-863-81	s RES, CHIP 100 (1005)
R252	1-208-863-81	s RES, CHIP 100 (1005)
R253	1-208-887-81	s RES, CHIP 1.0K (1005)
R254	1-208-887-81	s RES, CHIP 1.0K (1005)
R255	1-208-887-81	s RES, CHIP 1.0K (1005)
R256	1-208-887-81	s RES, CHIP 1.0K (1005)
R257	1-208-887-81	s RES, CHIP 1.0K (1005)
R258	1-208-887-81	s RES, CHIP 1.0K (1005)
R259	1-208-887-81	s RES, CHIP 1.0K (1005)
R260	1-208-911-81	s RES, CHIP 10K (1005)
R264	1-208-903-81	s RES, CHIP 4.7K (1005)
R267	1-208-919-81	s RES, CHIP 22K (1005)
R268	1-208-911-81	s RES, CHIP 10K (1005)
R269	1-208-915-81	s RES, CHIP 15K (1005)
R270	1-208-903-81	s RES, CHIP 4.7K (1005)
R271	1-208-927-81	s RES, CHIP 47K (1005)
R272	1-208-927-81	s RES, CHIP 47K (1005)
R273	1-208-899-81	s RES, CHIP 3.3K (1005)
R274	1-208-935-81	s RES, CHIP 100K (1005)
R275	1-208-935-81	s RES, CHIP 100K (1005)
R276	1-208-911-81	s RES, CHIP 10K (1005)
R277	1-208-911-81	s RES, CHIP 10K (1005)
R278	1-208-935-81	s RES, CHIP 100K (1005)
R279	1-208-911-81	s RES, CHIP 10K (1005)
R280	1-208-935-81	s RES, CHIP 100K (1005)
R281	1-208-911-81	s RES, CHIP 10K (1005)

(CNB-25 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R300	1-208-925-81	s RES, CHIP 39K (1005)
R301	1-208-887-81	s RES, CHIP 1.0K (1005)
R302	1-208-931-81	s RES, CHIP 68K (1005)
R303	1-219-706-21	s RES, CHIP (SQUARE TYPE) 0.10
R304	1-208-925-81	s RES, CHIP 39K (1005)
R305	1-208-931-81	s RES, CHIP 68K (1005)
R306	1-208-931-81	s RES, CHIP 68K (1005)
R307	1-208-925-81	s RES, CHIP 39K (1005)
R308	1-208-855-81	s RES, CHIP 47 (1005)
R309	1-208-863-81	s RES, CHIP 100 (1005)
R310	1-208-927-81	s RES, CHIP 47K (1005)
R311	1-208-917-81	s RES, CHIP 18K (1005)
R312	1-208-899-81	s RES, CHIP 3.3K (1005)
R313	1-208-947-81	s RES, CHIP 330K (1005)
R314	1-208-947-81	s RES, CHIP 330K (1005)
R315	1-208-879-81	s RES, CHIP 470 (1005)
R316	1-208-911-81	s RES, CHIP 10K (1005)
R317	1-208-935-81	s RES, CHIP 100K (1005)
R318	1-208-935-81	s RES, CHIP 100K (1005)
THP1	△ 1-802-063-21	s THERMISTOR, POSITIVE
THP2	△ 1-802-063-21	s THERMISTOR, POSITIVE
TP1	1-535-757-21	s CHIP, CHECKER
TP2	1-535-757-21	s CHIP, CHECKER

DCP-44 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-883-A	s MOUNTED CIRCUIT BOARD, DCP-44
3pcs	3-855-938-01	s SCREW
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C201	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C204	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C210	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C213	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C217	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C221	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C224	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C232	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C240	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C244	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C269	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
C275	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C279	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C281	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-421-21 s	CAP, ELECT 220MF (6.3X5.9)
C304	1-100-421-21 s	CAP, ELECT 220MF (6.3X5.9)
C305	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C313	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C325	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C326	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C327	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C339	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C340	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C341	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C342	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C343	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C345	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C346	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C347	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C348	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C349	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C350	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C352	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C355	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C363	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C364	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C365	1-165-884-91 s	CAP, CERAMIC 2.2MF (1608)
C366	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C370	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C371	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C372	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C373	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C374	1-165-989-91 s	CAP, CERAMIC 10MF (2012)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
C375	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C376	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C377	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-165-872-21 s	CAP, ELECT 47MF (5.0X6.5)
C379	1-165-872-21 s	CAP, ELECT 47MF (5.0X6.5)
C380	1-165-872-21 s	CAP, ELECT 47MF (5.0X6.5)
C381	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C382	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C383	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C384	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C385	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C386	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C387	1-165-871-21 s	CAP, ELECT 22MF (4.0X5.5)
C388	1-165-871-21 s	CAP, ELECT 22MF (4.0X5.5)
C389	1-165-871-21 s	CAP, ELECT 22MF (4.0X5.5)
C400	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C401	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C402	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C403	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C404	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C405	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C406	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C407	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C408	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-100-055-21 s	CAP, CHIP CERAMIC 22MF B 3225
C412	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C417	1-164-935-81 s	CAP, CHIP CERAMIC 470PF B 1005
C418	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C419	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C420	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C421	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C422	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C423	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C424	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C428	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C429	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C430	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C431	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C432	1-112-015-91 s	CAP, CHIP CERAMIC 47MF B 3225
C433	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C436	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C441	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C442	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C446	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C625	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C626	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C627	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C628	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C629	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C630	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C631	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C632	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C633	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C634	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C635	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C636	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C637	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C638	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C639	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C640	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C641	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C642	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C643	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C644	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C645	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C646	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C647	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C666	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C737	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C738	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C739	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C740	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C741	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C742	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C743	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C744	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C745	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C746	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C747	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C750	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C753	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C754	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C755	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C756	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C757	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C758	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C759	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C760	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C761	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C762	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C763	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C765	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C766	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C800	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C801	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C802	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C803	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C804	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C805	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C806	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C810	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C816	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C878	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C880	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C881	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C882	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C883	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C884	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C885	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C886	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C887	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C888	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C889	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C890	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C891	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C892	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C893	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C895	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C897	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C898	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C899	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C900	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C901	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C902	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C903	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C904	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C905	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C906	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C907	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C908	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C915	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C916	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
C1116	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1117	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1118	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1119	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1121	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1129	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1135	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1136	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1137	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1138	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1141	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1142	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1143	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1144	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1145	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1146	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1147	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1148	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1153	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1154	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1155	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1159	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1160	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1161	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1166	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1167	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1168	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1169	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1172	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1174	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1177	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1178	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1181	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C1183	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1184	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1185	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1186	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1187	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1188	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1189	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1302	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1303	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1304	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
C1305	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1306	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1307	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1308	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1309	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1310	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1311	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1312	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1315	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1316	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1317	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1318	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1321	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1322	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1323	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1324	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1325	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1326	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1327	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1328	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1329	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1330	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1331	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1332	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1333	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1334	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1335	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1336	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1339	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C1340	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1341	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C1342	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1345	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1346	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1347	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1348	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1349	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C1350	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C1353	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1355	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1356	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1357	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C1359	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C1361	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1362	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C1363	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1364	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1533	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1539	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1545	1-164-860-81	s	CAP, CHIP CERAMIC 27PF CH 1005
C1546	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1551	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1562	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1563	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1567	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1570	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1576	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1580	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C1581	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
C1582	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1583	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1584	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1585	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1586	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1587	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1588	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1589	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1590	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C1591	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1592	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1593	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1594	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1595	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1596	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1597	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1599	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1605	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1606	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1608	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1612	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1617	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1618	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1619	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1620	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1622	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1623	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1624	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1625	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1626	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C1627	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1628	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1629	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1630	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1631	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C1632	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1633	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1634	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1635	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1636	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1637	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C1639	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C1640	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C1641	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
CN2	1-818-579-91	s CONNECTOR, BOARD TO BOARD(60P)
CN3	1-691-591-21	o PIN, CONNECTOR (1.5MM) (SMD)8P
CN6	1-815-175-11	o CONNECTOR, BOARD TO BOARD 20P
CN10	1-764-243-31	o CONNECTOR (COAXIAL)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
CN11	1-764-243-31	o CONNECTOR (COAXIAL)
CN12	1-764-243-31	o CONNECTOR (COAXIAL)
CN13	1-764-243-31	o CONNECTOR (COAXIAL)
CN14	1-764-243-31	o CONNECTOR (COAXIAL)
CN15	1-764-243-31	o CONNECTOR (COAXIAL)
CN100	1-784-254-21	s CONNECTOR 10P
D1	8-719-069-28	s DIODE 1SS400TE-61
D200	8-719-989-04	s DIODE DAN222-TL
D400	8-719-083-60	s DIODE UDZSNPTE-174.7B
D401	8-719-083-60	s DIODE UDZSNPTE-174.7B
D402	8-719-083-60	s DIODE UDZSNPTE-174.7B
D403	8-719-083-60	s DIODE UDZSNPTE-174.7B
D404	8-719-989-01	s DIODE DA221-TL
D405	8-719-989-01	s DIODE DA221-TL
D406	8-719-989-01	s DIODE DA221-TL
D500	8-719-991-01	s DIODE DAP222-TL
D501	8-719-991-01	s DIODE DAP222-TL
D1300	8-719-991-01	s DIODE DAP222-TL
D1301	8-719-991-01	s DIODE DAP222-TL
D1500	8-719-989-04	s DIODE DAN222-TL
E201	1-535-877-22	s CHIP, CHECKER
E400	1-535-877-22	s CHIP, CHECKER
E401	1-535-877-22	s CHIP, CHECKER
E1000	1-535-877-22	s CHIP, CHECKER
E1001	1-535-877-22	s CHIP, CHECKER
E1002	1-535-877-22	s CHIP, CHECKER
E1003	1-535-877-22	s CHIP, CHECKER
FB202	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB300	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB301	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB302	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB303	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB304	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB305	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB800	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB803	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB804	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB805	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB806	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB807	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB808	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB809	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB810	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB811	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB812	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB813	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB814	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1300	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1301	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1302	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1303	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1304	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1305	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1306	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1307	1-400-462-21	s FERRITE, EMI (SMD) (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
FB1308	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1309	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1310	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1311	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1312	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1313	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1314	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1315	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1316	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1317	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1318	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1319	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1320	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1321	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB1322	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FL300	1-813-541-11	s	FILTER, LOW PASS
FL301	1-813-541-11	s	FILTER, LOW PASS
FL302	1-813-541-11	s	FILTER, LOW PASS
FL1500	1-233-742-21	s	FILTER, LOW PASS
IC1	6-706-476-01	s	IC TC7SET04FU (T5RSOJF)
IC2	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC4	8-759-346-27	s	IC LM45BIM3X
IC6	8-759-327-01	s	IC NJM062V (TE2)
IC8	6-712-526-01	s	IC CAT24C32WI-GT3 (E)
IC9	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC10	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC14	6-704-350-01	s	IC SN74LVC1G66DCKR
IC16	6-704-350-01	s	IC SN74LVC1G66DCKR
IC19	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC200	6-711-696-01	s	IC CY62256VNL-70ZXT
IC202	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC203	8-759-672-76	s	IC AK9813BF-E2
IC210	6-700-225-01	s	IC TC74VCX157FT (EL)
IC220	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC222	8-759-669-67	s	IC TL074CPWR-12
IC223	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC224	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC225	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC226	6-707-414-01	s	IC DS90LV011ATMF
IC227	6-707-414-01	s	IC DS90LV011ATMF
IC228	6-711-852-01	s	IC LTC1844ES5-BYP
IC229	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC230	6-711-852-01	s	IC LTC1844ES5-BYP
IC301	6-707-884-01	s	IC TC74VHCT04AFT (EKJ)
IC303	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC304	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC305	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC306	8-759-675-54	s	IC TC7W53FK (TE85R)
IC307	8-759-675-54	s	IC TC7W53FK (TE85R)
IC308	8-759-675-54	s	IC TC7W53FK (TE85R)
IC312	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC313	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC314	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC318	6-711-361-01	s	IC LTC2249CUH#TR
IC319	6-711-361-01	s	IC LTC2249CUH#TR
IC320	6-711-361-01	s	IC LTC2249CUH#TR
IC322	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC323	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC324	6-704-350-01	s	IC SN74LVC1G66DCKR

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC325	6-704-350-01	s	IC SN74LVC1G66DCKR
IC326	6-704-350-01	s	IC SN74LVC1G66DCKR
IC331	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC332	8-759-592-44	s	IC TC7SZ04FU (TE85R)
IC333	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC336	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC337	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC338	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC400	8-759-327-01	s	IC NJM062V (TE2)
IC401	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC402	8-759-327-01	s	IC NJM062V (TE2)
IC403	8-759-327-01	s	IC NJM062V (TE2)
IC404	8-759-485-24	s	IC MC74HC4046ADTR2
IC406	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC407	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC408	8-759-675-54	s	IC TC7W53FK (TE85R)
IC410	8-759-675-47	s	IC SN74LVC04APWR
IC411	6-701-877-01	s	IC SM8707EV-G-E2
IC412	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC413	6-706-136-01	s	IC LTC3412EFE#TR
IC414	6-706-136-01	s	IC LTC3412EFE#TR
IC415	8-759-675-54	s	IC TC7W53FK (TE85R)
IC416	6-711-852-01	s	IC LTC1844ES5-BYP
IC417	8-759-327-01	s	IC NJM062V (TE2)
IC418	8-759-669-66	s	IC TLC272CPWR-12
IC419	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC501	6-706-088-01	s	IC UPD6467GR-560-E2
IC502	6-706-088-01	s	IC UPD6467GR-560-E2
IC503	6-706-088-01	s	IC UPD6467GR-560-E2
IC504	6-706-088-01	s	IC UPD6467GR-560-E2
IC506	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC507	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC508	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC801	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC901	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC902	6-709-435-01	s	IC IS42S32200C1-6TL-TR
IC1102	8-759-669-43	s	IC SN74LVC157APWR-12
IC1104	6-712-298-01	s	IC GS1524ACKDE3
IC1105	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC1109	6-711-946-01	s	IC GS1528BCKAE3
IC1112	6-711-946-01	s	IC GS1528BCKAE3
IC1113	6-711-946-01	s	IC GS1528BCKAE3
IC1116	6-706-220-01	s	IC LTC3411EMS#TR
IC1119	6-712-297-01	s	IC PCA9555DBR
IC1120	6-707-891-01	s	IC TC74VHCT245AFT (EKJ)
IC1121	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC1300	6-706-220-01	s	IC LTC3411EMS#TR
IC1301	6-706-220-01	s	IC LTC3411EMS#TR
IC1302	6-706-220-01	s	IC LTC3411EMS#TR
IC1303	6-706-220-01	s	IC LTC3411EMS#TR
IC1304	8-759-337-40	s	IC NJM2904V (TE2)
IC1305	6-708-346-01	s	IC DAC7512N
IC1306	6-707-891-01	s	IC TC74VHCT245AFT (EKJ)
IC1308	8-759-669-43	s	IC SN74LVC157APWR-12
IC1309	6-708-920-01	o	IC K4M28323LH-HN75T
IC1310	6-706-136-01	s	IC LTC3412EFE#TR
IC1311	6-703-848-01	s	IC SN74CB3T3306DCUR
IC1312	6-703-848-01	s	IC SN74CB3T3306DCUR
IC1313	6-706-220-01	s	IC LTC3411EMS#TR

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC1314	8-759-592-47	s	IC TC7S208FU (TE85R)
IC1315	8-759-592-47	s	IC TC7S208FU (TE85R)
IC1316	8-759-592-47	s	IC TC7S208FU (TE85R)
IC1500	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1501	8-759-669-66	s	IC TLC272CPWR-12
IC1502	8-759-675-54	s	IC TC7W53FK (TE85R)
IC1503	8-759-669-66	s	IC TLC272CPWR-12
IC1504	8-759-327-14	s	IC TL712CPSR
IC1505	8-759-327-14	s	IC TL712CPSR
IC1506	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1508	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1509	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1510	8-759-184-65	s	IC TC4W66FU (TE12R)
IC1511	8-759-398-57	s	IC LM1881MX NOPB
IC1512	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC1513	6-706-471-01	s	IC THS5661AIPWR
IC1514	6-707-865-01	s	IC TC74VHC125FT (EKJ)
IC1515	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1516	8-759-327-01	s	IC NJM062V (TE2)
IC1517	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1518	6-707-997-01	s	IC ADV7320KSTZ
IC1519	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1520	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1521	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1522	8-759-672-76	s	IC AK9813BF-E2
IC1523	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1524	6-707-997-01	s	IC ADV7320KSTZ
IC1525	6-707-997-01	s	IC ADV7320KSTZ
IC1526	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1527	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1528	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC1529	8-759-675-54	s	IC TC7W53FK (TE85R)
IC1530	8-759-675-54	s	IC TC7W53FK (TE85R)
IC1531	6-704-350-01	s	IC SN74LVC1G66DCKR
IC1532	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
L200	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L400	1-416-344-21	s	COIL, CHOKE 10UH
L401	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L402	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L403	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L404	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L405	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L406	1-424-723-21	s	COIL, CHOKE 1.0UH
L407	1-424-723-21	s	COIL, CHOKE 1.0UH
L408	1-416-344-21	s	COIL, CHOKE 10UH
L409	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L410	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L411	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L412	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L413	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L414	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L416	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L417	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L600	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s	INDUCTOR (SMD) 1.0UH

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
L604	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L605	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L800	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L801	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L802	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L803	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L804	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L805	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L806	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1100	1-414-836-21	s	INDUCTOR, CHIP 4.7NH (1005)
L1103	1-414-801-21	s	INDUCTOR 5.6NH (1005)
L1104	1-414-801-21	s	INDUCTOR 5.6NH (1005)
L1106	1-414-801-21	s	INDUCTOR 5.6NH (1005)
L1107	1-419-630-21	s	COIL, CHOKE 4.7UH
L1300	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1301	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1302	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1303	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1306	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1307	1-419-630-21	s	COIL, CHOKE 4.7UH
L1500	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1501	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1504	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L1505	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1506	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1507	1-412-981-41	s	INDUCTOR, SMALL TYPE 1.5UH
L1508	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1510	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1511	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1512	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1513	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1514	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L1515	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1516	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L1517	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L1518	1-412-947-21	s	INDUCTOR 4.7UH (2520)
L1519	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L1520	1-412-979-41	s	INDUCTOR, SMALL TYPE 1.0UH
L1521	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
Q300	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q301	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q400	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q401	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q402	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q404	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q405	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q406	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q408	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q409	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q410	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q411	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q414	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q501	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q505	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q506	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1105	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1106	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1107	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1108	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
Q1300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1301	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1500	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1501	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1503	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1504	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1505	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1506	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1507	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1509	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1510	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1511	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1512	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1513	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1514	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1515	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-208-855-81	s	RES, CHIP 47 (1005)
R4	1-208-855-81	s	RES, CHIP 47 (1005)
R5	1-208-855-81	s	RES, CHIP 47 (1005)
R6	1-208-855-81	s	RES, CHIP 47 (1005)
R7	1-208-855-81	s	RES, CHIP 47 (1005)
R8	1-208-855-81	s	RES, CHIP 47 (1005)
R9	1-208-855-81	s	RES, CHIP 47 (1005)
R10	1-208-855-81	s	RES, CHIP 47 (1005)
R11	1-208-855-81	s	RES, CHIP 47 (1005)
R12	1-208-855-81	s	RES, CHIP 47 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R19	1-208-855-81	s	RES, CHIP 47 (1005)
R20	1-208-855-81	s	RES, CHIP 47 (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)
R22	1-208-855-81	s	RES, CHIP 47 (1005)
R23	1-208-855-81	s	RES, CHIP 47 (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-935-81	s	RES, CHIP 100K (1005)
R29	1-208-863-81	s	RES, CHIP 100 (1005)
R30	1-208-863-81	s	RES, CHIP 100 (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R33	1-208-887-81	s	RES, CHIP 1.0K (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-863-81	s	RES, CHIP 100 (1005)
R41	1-208-855-81	s	RES, CHIP 47 (1005)
R42	1-208-855-81	s	RES, CHIP 47 (1005)
R51	1-208-855-81	s	RES, CHIP 47 (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
R52	1-208-855-81	s	RES, CHIP 47 (1005)
R53	1-208-855-81	s	RES, CHIP 47 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R57	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-208-919-81	s	RES, CHIP 22K (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-879-81	s	RES, CHIP 470 (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-879-81	s	RES, CHIP 470 (1005)
R210	1-208-895-81	s	RES, CHIP 2.2K (1005)
R211	1-208-879-81	s	RES, CHIP 470 (1005)
R213	1-208-860-81	s	RES, CHIP 75 (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-860-81	s	RES, CHIP 75 (1005)
R216	1-208-860-81	s	RES, CHIP 75 (1005)
R217	1-208-895-81	s	RES, CHIP 2.2K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-923-81	s	RES, CHIP 33K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-871-81	s	RES, CHIP 220 (1005)
R228	1-208-875-81	s	RES, CHIP 330 (1005)
R229	1-208-895-81	s	RES, CHIP 2.2K (1005)
R230	1-220-870-81	s	RES, CHIP 10 (1005)
R231	1-208-935-81	s	RES, CHIP 100K (1005)
R232	1-208-879-81	s	RES, CHIP 470 (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-935-81	s	RES, CHIP 100K (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R243	1-208-935-81	s	RES, CHIP 100K (1005)
R247	1-220-878-81	s	RES, CHIP 22 (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-220-878-81	s	RES, CHIP 22 (1005)
R254	1-220-878-81	s	RES, CHIP 22 (1005)
R255	1-220-878-81	s	RES, CHIP 22 (1005)
R259	1-220-878-81	s	RES, CHIP 22 (1005)
R260	1-220-878-81	s	RES, CHIP 22 (1005)
R261	1-208-855-81	s	RES, CHIP 47 (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R264	1-208-855-81	s	RES, CHIP 47 (1005)
R265	1-208-855-81	s	RES, CHIP 47 (1005)
R266	1-208-855-81	s	RES, CHIP 47 (1005)
R267	1-208-855-81	s	RES, CHIP 47 (1005)
R268	1-208-855-81	s	RES, CHIP 47 (1005)
R269	1-208-887-81	s	RES, CHIP 1.0K (1005)
R270	1-208-887-81	s	RES, CHIP 1.0K (1005)
R271	1-208-887-81	s	RES, CHIP 1.0K (1005)
R272	1-208-887-81	s	RES, CHIP 1.0K (1005)
R273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R274	1-208-879-81	s	RES, CHIP 470 (1005)
R275	1-220-870-81	s	RES, CHIP 10 (1005)
R276	1-220-870-81	s	RES, CHIP 10 (1005)
R277	1-220-870-81	s	RES, CHIP 10 (1005)
R278	1-220-878-81	s	RES, CHIP 22 (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R279	1-220-878-81	s RES, CHIP 22 (1005)
R280	1-208-915-81	s RES, CHIP 15K (1005)
R281	1-208-911-81	s RES, CHIP 10K (1005)
R282	1-208-935-81	s RES, CHIP 100K (1005)
R283	1-218-990-81	s CONDUCTOR, CHIP (1005)
R284	1-208-887-81	s RES, CHIP 1.0K (1005)
R285	1-208-887-81	s RES, CHIP 1.0K (1005)
R286	1-208-895-81	s RES, CHIP 2.2K (1005)
R287	1-208-863-81	s RES, CHIP 100 (1005)
R288	1-208-863-81	s RES, CHIP 100 (1005)
R289	1-208-871-81	s RES, CHIP 220 (1005)
R290	1-208-899-81	s RES, CHIP 3.3K (1005)
R291	1-208-895-81	s RES, CHIP 2.2K (1005)
R292	1-208-927-81	s RES, CHIP 47K (1005)
R293	1-208-863-81	s RES, CHIP 100 (1005)
R294	1-218-990-81	s CONDUCTOR, CHIP (1005)
R295	1-218-990-81	s CONDUCTOR, CHIP (1005)
R296	1-208-863-81	s RES, CHIP 100 (1005)
R297	1-218-990-81	s CONDUCTOR, CHIP (1005)
R298	1-218-990-81	s CONDUCTOR, CHIP (1005)
R308	1-208-879-81	s RES, CHIP 470 (1005)
R311	1-208-879-81	s RES, CHIP 470 (1005)
R313	1-208-879-81	s RES, CHIP 470 (1005)
R319	1-208-879-81	s RES, CHIP 470 (1005)
R321	1-208-879-81	s RES, CHIP 470 (1005)
R323	1-208-879-81	s RES, CHIP 470 (1005)
R324	1-208-887-81	s RES, CHIP 1.0K (1005)
R325	1-208-887-81	s RES, CHIP 1.0K (1005)
R326	1-208-887-81	s RES, CHIP 1.0K (1005)
R327	1-208-887-81	s RES, CHIP 1.0K (1005)
R328	1-208-887-81	s RES, CHIP 1.0K (1005)
R329	1-208-887-81	s RES, CHIP 1.0K (1005)
R332	1-208-887-81	s RES, CHIP 1.0K (1005)
R333	1-208-887-81	s RES, CHIP 1.0K (1005)
R334	1-208-887-81	s RES, CHIP 1.0K (1005)
R335	1-208-887-81	s RES, CHIP 1.0K (1005)
R337	1-208-887-81	s RES, CHIP 1.0K (1005)
R338	1-208-887-81	s RES, CHIP 1.0K (1005)
R345	1-208-875-81	s RES, CHIP 330 (1005)
R346	1-208-875-81	s RES, CHIP 330 (1005)
R347	1-208-875-81	s RES, CHIP 330 (1005)
R348	1-208-903-81	s RES, CHIP 4.7K (1005)
R349	1-208-903-81	s RES, CHIP 4.7K (1005)
R350	1-208-903-81	s RES, CHIP 4.7K (1005)
R351	1-208-903-81	s RES, CHIP 4.7K (1005)
R352	1-208-903-81	s RES, CHIP 4.7K (1005)
R353	1-208-903-81	s RES, CHIP 4.7K (1005)
R354	1-208-935-81	s RES, CHIP 100K (1005)
R356	1-208-935-81	s RES, CHIP 100K (1005)
R358	1-208-935-81	s RES, CHIP 100K (1005)
R359	1-208-859-81	s RES, CHIP 68 (1005)
R360	1-208-859-81	s RES, CHIP 68 (1005)
R361	1-208-859-81	s RES, CHIP 68 (1005)
R363	1-208-875-81	s RES, CHIP 330 (1005)
R364	1-208-875-81	s RES, CHIP 330 (1005)
R365	1-208-875-81	s RES, CHIP 330 (1005)
R366	1-208-883-81	s RES, CHIP 680 (1005)
R367	1-208-879-81	s RES, CHIP 470 (1005)
R368	1-208-883-81	s RES, CHIP 680 (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R369	1-208-911-81	s RES, CHIP 10K (1005)
R370	1-208-911-81	s RES, CHIP 10K (1005)
R371	1-220-878-81	s RES, CHIP 22 (1005)
R372	1-218-990-81	s CONDUCTOR, CHIP (1005)
R373	1-208-863-81	s RES, CHIP 100 (1005)
R374	1-218-990-81	s CONDUCTOR, CHIP (1005)
R375	1-220-878-81	s RES, CHIP 22 (1005)
R376	1-220-878-81	s RES, CHIP 22 (1005)
R377	1-220-878-81	s RES, CHIP 22 (1005)
R378	1-208-855-81	s RES, CHIP 47 (1005)
R379	1-208-855-81	s RES, CHIP 47 (1005)
R380	1-208-855-81	s RES, CHIP 47 (1005)
R381	1-218-990-81	s CONDUCTOR, CHIP (1005)
R382	1-218-990-81	s CONDUCTOR, CHIP (1005)
R383	1-218-990-81	s CONDUCTOR, CHIP (1005)
R384	1-208-911-81	s RES, CHIP 10K (1005)
R385	1-208-911-81	s RES, CHIP 10K (1005)
R386	1-208-911-81	s RES, CHIP 10K (1005)
R387	1-208-903-81	s RES, CHIP 4.7K (1005)
R388	1-208-919-81	s RES, CHIP 22K (1005)
R389	1-208-887-81	s RES, CHIP 1.0K (1005)
R390	1-208-919-81	s RES, CHIP 22K (1005)
R392	1-218-990-81	s CONDUCTOR, CHIP (1005)
R393	1-208-935-81	s RES, CHIP 100K (1005)
R395	1-208-863-81	s RES, CHIP 100 (1005)
R396	1-218-990-81	s CONDUCTOR, CHIP (1005)
R397	1-220-878-81	s RES, CHIP 22 (1005)
R398	1-220-878-81	s RES, CHIP 22 (1005)
R399	1-220-878-81	s RES, CHIP 22 (1005)
R400	1-208-863-81	s RES, CHIP 100 (1005)
R401	1-208-871-81	s RES, CHIP 220 (1005)
R403	1-218-990-81	s CONDUCTOR, CHIP (1005)
R404	1-208-939-81	s RES, CHIP 150K (1005)
R405	1-208-939-81	s RES, CHIP 150K (1005)
R406	1-208-923-81	s RES, CHIP 33K (1005)
R407	1-208-923-81	s RES, CHIP 33K (1005)
R408	1-208-903-81	s RES, CHIP 4.7K (1005)
R410	1-208-871-81	s RES, CHIP 220 (1005)
R411	1-208-959-81	s RES, CHIP 1M (1005)
R412	1-208-959-81	s RES, CHIP 1M (1005)
R413	1-208-887-81	s RES, CHIP 1.0K (1005)
R414	1-208-903-81	s RES, CHIP 4.7K (1005)
R415	1-208-915-81	s RES, CHIP 15K (1005)
R417	1-208-931-81	s RES, CHIP 68K (1005)
R418	1-218-990-81	s CONDUCTOR, CHIP (1005)
R419	1-208-931-81	s RES, CHIP 68K (1005)
R420	1-208-923-81	s RES, CHIP 33K (1005)
R421	1-208-923-81	s RES, CHIP 33K (1005)
R422	1-208-903-81	s RES, CHIP 4.7K (1005)
R423	1-208-939-81	s RES, CHIP 150K (1005)
R424	1-208-939-81	s RES, CHIP 150K (1005)
R425	1-208-943-81	s RES, CHIP 220K (1005)
R426	1-208-927-81	s RES, CHIP 47K (1005)
R427	1-208-943-81	s RES, CHIP 220K (1005)
R428	1-208-927-81	s RES, CHIP 47K (1005)
R430	1-208-911-81	s RES, CHIP 10K (1005)
R431	1-208-935-81	s RES, CHIP 100K (1005)
R432	1-208-919-81	s RES, CHIP 22K (1005)
R433	1-208-935-81	s RES, CHIP 100K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R434	1-208-911-81 s	RES, CHIP 10K (1005)
R435	1-208-935-81 s	RES, CHIP 100K (1005)
R436	1-208-931-81 s	RES, CHIP 68K (1005)
R437	1-208-947-81 s	RES, CHIP 330K (1005)
R438	1-208-935-81 s	RES, CHIP 100K (1005)
R439	1-208-935-81 s	RES, CHIP 100K (1005)
R440	1-208-915-81 s	RES, CHIP 15K (1005)
R441	1-208-903-81 s	RES, CHIP 4.7K (1005)
R442	1-208-903-81 s	RES, CHIP 4.7K (1005)
R443	1-208-883-81 s	RES, CHIP 680 (1005)
R447	1-208-927-81 s	RES, CHIP 47K (1005)
R448	1-208-915-81 s	RES, CHIP 15K (1005)
R449	1-208-903-81 s	RES, CHIP 4.7K (1005)
R450	1-208-919-81 s	RES, CHIP 22K (1005)
R451	1-208-919-81 s	RES, CHIP 22K (1005)
R452	1-208-903-81 s	RES, CHIP 4.7K (1005)
R453	1-208-919-81 s	RES, CHIP 22K (1005)
R454	1-208-931-81 s	RES, CHIP 68K (1005)
R455	1-208-911-81 s	RES, CHIP 10K (1005)
R456	1-208-863-81 s	RES, CHIP 100 (1005)
R457	1-208-911-81 s	RES, CHIP 10K (1005)
R458	1-208-863-81 s	RES, CHIP 100 (1005)
R459	1-208-863-81 s	RES, CHIP 100 (1005)
R460	1-208-863-81 s	RES, CHIP 100 (1005)
R461	1-208-863-81 s	RES, CHIP 100 (1005)
R462	1-208-863-81 s	RES, CHIP 100 (1005)
R463	1-208-895-81 s	RES, CHIP 2.2K (1005)
R464	1-208-895-81 s	RES, CHIP 2.2K (1005)
R465	1-208-927-81 s	RES, CHIP 47K (1005)
R466	1-208-915-81 s	RES, CHIP 15K (1005)
R467	1-208-911-81 s	RES, CHIP 10K (1005)
R468	1-208-895-81 s	RES, CHIP 2.2K (1005)
R470	1-208-919-81 s	RES, CHIP 22K (1005)
R471	1-208-911-81 s	RES, CHIP 10K (1005)
R472	1-208-863-81 s	RES, CHIP 100 (1005)
R473	1-208-927-81 s	RES, CHIP 47K (1005)
R474	1-208-935-81 s	RES, CHIP 100K (1005)
R475	1-208-927-81 s	RES, CHIP 47K (1005)
R476	1-208-895-81 s	RES, CHIP 2.2K (1005)
R477	1-208-887-81 s	RES, CHIP 1.0K (1005)
R478	1-208-895-81 s	RES, CHIP 2.2K (1005)
R479	1-208-911-81 s	RES, CHIP 10K (1005)
R480	1-220-870-81 s	RES, CHIP 10 (1005)
R481	1-208-911-81 s	RES, CHIP 10K (1005)
R482	1-220-870-81 s	RES, CHIP 10 (1005)
R483	1-208-919-81 s	RES, CHIP 22K (1005)
R484	1-220-870-81 s	RES, CHIP 10 (1005)
R485	1-208-959-81 s	RES, CHIP 1M (1005)
R486	1-208-887-81 s	RES, CHIP 1.0K (1005)
R487	1-208-911-81 s	RES, CHIP 10K (1005)
R488	1-208-863-81 s	RES, CHIP 100 (1005)
R489	1-220-870-81 s	RES, CHIP 10 (1005)
R490	1-208-855-81 s	RES, CHIP 47 (1005)
R491	1-208-863-81 s	RES, CHIP 100 (1005)
R492	1-208-943-81 s	RES, CHIP 220K (1005)
R500	1-208-863-81 s	RES, CHIP 100 (1005)
R501	1-208-863-81 s	RES, CHIP 100 (1005)
R502	1-208-911-81 s	RES, CHIP 10K (1005)
R503	1-208-911-81 s	RES, CHIP 10K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R505	1-208-863-81 s	RES, CHIP 100 (1005)
R506	1-208-863-81 s	RES, CHIP 100 (1005)
R507	1-208-927-81 s	RES, CHIP 47K (1005)
R508	1-208-927-81 s	RES, CHIP 47K (1005)
R511	1-208-863-81 s	RES, CHIP 100 (1005)
R513	1-208-863-81 s	RES, CHIP 100 (1005)
R514	1-208-863-81 s	RES, CHIP 100 (1005)
R515	1-208-863-81 s	RES, CHIP 100 (1005)
R519	1-208-863-81 s	RES, CHIP 100 (1005)
R520	1-208-863-81 s	RES, CHIP 100 (1005)
R524	1-220-878-81 s	RES, CHIP 22 (1005)
R526	1-220-878-81 s	RES, CHIP 22 (1005)
R528	1-220-878-81 s	RES, CHIP 22 (1005)
R537	1-208-863-81 s	RES, CHIP 100 (1005)
R545	1-208-863-81 s	RES, CHIP 100 (1005)
R600	1-208-863-81 s	RES, CHIP 100 (1005)
R601	1-208-895-81 s	RES, CHIP 2.2K (1005)
R602	1-208-895-81 s	RES, CHIP 2.2K (1005)
R604	1-208-855-81 s	RES, CHIP 47 (1005)
R605	1-208-855-81 s	RES, CHIP 47 (1005)
R606	1-208-863-81 s	RES, CHIP 100 (1005)
R607	1-208-863-81 s	RES, CHIP 100 (1005)
R608	1-208-863-81 s	RES, CHIP 100 (1005)
R609	1-208-855-81 s	RES, CHIP 47 (1005)
R610	1-208-911-81 s	RES, CHIP 10K (1005)
R611	1-208-863-81 s	RES, CHIP 100 (1005)
R612	1-208-863-81 s	RES, CHIP 100 (1005)
R613	1-208-863-81 s	RES, CHIP 100 (1005)
R614	1-208-863-81 s	RES, CHIP 100 (1005)
R615	1-208-863-81 s	RES, CHIP 100 (1005)
R619	1-208-863-81 s	RES, CHIP 100 (1005)
R800	1-208-863-81 s	RES, CHIP 100 (1005)
R801	1-208-863-81 s	RES, CHIP 100 (1005)
R802	1-208-863-81 s	RES, CHIP 100 (1005)
R803	1-208-863-81 s	RES, CHIP 100 (1005)
R804	1-208-863-81 s	RES, CHIP 100 (1005)
R805	1-208-863-81 s	RES, CHIP 100 (1005)
R806	1-208-911-81 s	RES, CHIP 10K (1005)
R807	1-208-911-81 s	RES, CHIP 10K (1005)
R808	1-208-863-81 s	RES, CHIP 100 (1005)
R809	1-208-863-81 s	RES, CHIP 100 (1005)
R810	1-208-863-81 s	RES, CHIP 100 (1005)
R811	1-208-863-81 s	RES, CHIP 100 (1005)
R812	1-208-911-81 s	RES, CHIP 10K (1005)
R813	1-208-911-81 s	RES, CHIP 10K (1005)
R814	1-208-911-81 s	RES, CHIP 10K (1005)
R815	1-208-863-81 s	RES, CHIP 100 (1005)
R816	1-208-863-81 s	RES, CHIP 100 (1005)
R817	1-208-911-81 s	RES, CHIP 10K (1005)
R818	1-208-911-81 s	RES, CHIP 10K (1005)
R819	1-208-863-81 s	RES, CHIP 100 (1005)
R820	1-208-863-81 s	RES, CHIP 100 (1005)
R821	1-208-911-81 s	RES, CHIP 10K (1005)
R822	1-208-863-81 s	RES, CHIP 100 (1005)
R823	1-208-863-81 s	RES, CHIP 100 (1005)
R824	1-208-911-81 s	RES, CHIP 10K (1005)
R825	1-208-863-81 s	RES, CHIP 100 (1005)
R826	1-208-863-81 s	RES, CHIP 100 (1005)
R827	1-208-911-81 s	RES, CHIP 10K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R828	1-208-863-81	s RES, CHIP 100 (1005)
R829	1-208-863-81	s RES, CHIP 100 (1005)
R830	1-208-863-81	s RES, CHIP 100 (1005)
R1001	1-208-863-81	s RES, CHIP 100 (1005)
R1002	1-208-863-81	s RES, CHIP 100 (1005)
R1003	1-220-870-81	s RES, CHIP 10 (1005)
R1004	1-220-870-81	s RES, CHIP 10 (1005)
R1006	1-208-863-81	s RES, CHIP 100 (1005)
R1008	1-208-863-81	s RES, CHIP 100 (1005)
R1009	1-208-863-81	s RES, CHIP 100 (1005)
R1010	1-208-863-81	s RES, CHIP 100 (1005)
R1011	1-208-863-81	s RES, CHIP 100 (1005)
R1012	1-208-863-81	s RES, CHIP 100 (1005)
R1013	1-208-863-81	s RES, CHIP 100 (1005)
R1015	1-220-870-81	s RES, CHIP 10 (1005)
R1016	1-208-863-81	s RES, CHIP 100 (1005)
R1017	1-208-863-81	s RES, CHIP 100 (1005)
R1018	1-208-863-81	s RES, CHIP 100 (1005)
R1019	1-208-863-81	s RES, CHIP 100 (1005)
R1022	1-208-863-81	s RES, CHIP 100 (1005)
R1024	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1026	1-208-935-81	s RES, CHIP 100K (1005)
R1029	1-220-870-81	s RES, CHIP 10 (1005)
R1100	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1101	1-208-863-81	s RES, CHIP 100 (1005)
R1102	1-208-863-81	s RES, CHIP 100 (1005)
R1103	1-208-943-81	s RES, CHIP 220K (1005)
R1104	1-220-870-81	s RES, CHIP 10 (1005)
R1105	1-208-863-81	s RES, CHIP 100 (1005)
R1106	1-208-863-81	s RES, CHIP 100 (1005)
R1107	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1108	1-208-935-81	s RES, CHIP 100K (1005)
R1109	1-208-863-81	s RES, CHIP 100 (1005)
R1110	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1111	1-208-911-81	s RES, CHIP 10K (1005)
R1112	1-208-911-81	s RES, CHIP 10K (1005)
R1113	1-208-903-81	s RES, CHIP 4.7K (1005)
R1114	1-208-903-81	s RES, CHIP 4.7K (1005)
R1115	1-208-875-81	s RES, CHIP 330 (1005)
R1116	1-208-903-81	s RES, CHIP 4.7K (1005)
R1118	1-208-903-81	s RES, CHIP 4.7K (1005)
R1119	1-208-903-81	s RES, CHIP 4.7K (1005)
R1120	1-208-863-81	s RES, CHIP 100 (1005)
R1121	1-208-863-81	s RES, CHIP 100 (1005)
R1122	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1123	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1124	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1125	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1126	1-208-860-81	s RES, CHIP 75 (1005)
R1127	1-208-943-81	s RES, CHIP 220K (1005)
R1128	1-208-855-81	s RES, CHIP 47 (1005)
R1129	1-220-870-81	s RES, CHIP 10 (1005)
R1130	1-208-860-81	s RES, CHIP 75 (1005)
R1133	1-220-882-81	s RES, CHIP 33 (1005)
R1134	1-208-887-81	s RES, CHIP 1.0K (1005)
R1135	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1137	1-208-863-81	s RES, CHIP 100 (1005)
R1138	1-208-943-81	s RES, CHIP 220K (1005)
R1139	1-208-943-81	s RES, CHIP 220K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1140	1-208-943-81	s RES, CHIP 220K (1005)
R1141	1-208-943-81	s RES, CHIP 220K (1005)
R1146	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1147	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1148	1-208-911-81	s RES, CHIP 10K (1005)
R1149	1-208-915-81	s RES, CHIP 15K (1005)
R1150	1-208-887-81	s RES, CHIP 1.0K (1005)
R1151	1-220-878-81	s RES, CHIP 22 (1005)
R1155	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1156	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1166	1-220-882-81	s RES, CHIP 33 (1005)
R1167	1-220-882-81	s RES, CHIP 33 (1005)
R1172	1-208-856-81	s RES, CHIP 51 (1005)
R1173	1-208-856-81	s RES, CHIP 51 (1005)
R1174	1-208-856-81	s RES, CHIP 51 (1005)
R1175	1-208-856-81	s RES, CHIP 51 (1005)
R1178	1-220-878-81	s RES, CHIP 22 (1005)
R1179	1-208-883-81	s RES, CHIP 680 (1005)
R1180	1-220-878-81	s RES, CHIP 22 (1005)
R1181	1-208-883-81	s RES, CHIP 680 (1005)
R1182	1-208-860-81	s RES, CHIP 75 (1005)
R1183	1-208-860-81	s RES, CHIP 75 (1005)
R1184	1-208-860-81	s RES, CHIP 75 (1005)
R1185	1-208-860-81	s RES, CHIP 75 (1005)
R1186	1-208-867-81	s RES, CHIP 150 (1005)
R1187	1-208-867-81	s RES, CHIP 150 (1005)
R1192	1-208-911-81	s RES, CHIP 10K (1005)
R1193	1-208-911-81	s RES, CHIP 10K (1005)
R1194	1-220-882-81	s RES, CHIP 33 (1005)
R1198	1-208-856-81	s RES, CHIP 51 (1005)
R1200	1-208-856-81	s RES, CHIP 51 (1005)
R1203	1-220-878-81	s RES, CHIP 22 (1005)
R1204	1-208-883-81	s RES, CHIP 680 (1005)
R1205	1-208-860-81	s RES, CHIP 75 (1005)
R1206	1-208-860-81	s RES, CHIP 75 (1005)
R1207	1-208-867-81	s RES, CHIP 150 (1005)
R1210	1-208-911-81	s RES, CHIP 10K (1005)
R1213	1-208-959-81	s RES, CHIP 1M (1005)
R1214	1-208-959-81	s RES, CHIP 1M (1005)
R1215	1-208-915-81	s RES, CHIP 15K (1005)
R1216	1-208-887-81	s RES, CHIP 1.0K (1005)
R1217	1-208-935-81	s RES, CHIP 100K (1005)
R1218	1-208-943-81	s RES, CHIP 220K (1005)
R1219	1-208-935-81	s RES, CHIP 100K (1005)
R1220	1-208-927-81	s RES, CHIP 47K (1005)
R1221	1-208-935-81	s RES, CHIP 100K (1005)
R1222	1-208-927-81	s RES, CHIP 47K (1005)
R1223	1-220-878-81	s RES, CHIP 22 (1005)
R1224	1-220-878-81	s RES, CHIP 22 (1005)
R1231	1-208-860-81	s RES, CHIP 75 (1005)
R1232	1-208-943-81	s RES, CHIP 220K (1005)
R1233	1-208-943-81	s RES, CHIP 220K (1005)
R1234	1-208-943-81	s RES, CHIP 220K (1005)
R1235	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1300	1-208-959-81	s RES, CHIP 1M (1005)
R1301	1-208-959-81	s RES, CHIP 1M (1005)
R1302	1-208-959-81	s RES, CHIP 1M (1005)
R1303	1-208-959-81	s RES, CHIP 1M (1005)
R1304	1-208-915-81	s RES, CHIP 15K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1305	1-208-887-81	s RES, CHIP 1.0K (1005)
R1306	1-208-915-81	s RES, CHIP 15K (1005)
R1307	1-208-887-81	s RES, CHIP 1.0K (1005)
R1308	1-208-935-81	s RES, CHIP 100K (1005)
R1309	1-208-943-81	s RES, CHIP 220K (1005)
R1310	1-208-935-81	s RES, CHIP 100K (1005)
R1311	1-208-935-81	s RES, CHIP 100K (1005)
R1312	1-208-943-81	s RES, CHIP 220K (1005)
R1313	1-208-935-81	s RES, CHIP 100K (1005)
R1314	1-208-935-81	s RES, CHIP 100K (1005)
R1315	1-208-935-81	s RES, CHIP 100K (1005)
R1316	1-208-935-81	s RES, CHIP 100K (1005)
R1317	1-208-935-81	s RES, CHIP 100K (1005)
R1318	1-208-911-81	s RES, CHIP 10K (1005)
R1319	1-208-895-81	s RES, CHIP 2.2K (1005)
R1320	1-208-935-81	s RES, CHIP 100K (1005)
R1321	1-208-959-81	s RES, CHIP 1M (1005)
R1322	1-208-959-81	s RES, CHIP 1M (1005)
R1323	1-208-915-81	s RES, CHIP 15K (1005)
R1324	1-208-887-81	s RES, CHIP 1.0K (1005)
R1325	1-208-959-81	s RES, CHIP 1M (1005)
R1326	1-208-959-81	s RES, CHIP 1M (1005)
R1327	1-208-915-81	s RES, CHIP 15K (1005)
R1328	1-208-887-81	s RES, CHIP 1.0K (1005)
R1329	1-208-935-81	s RES, CHIP 100K (1005)
R1330	1-208-943-81	s RES, CHIP 220K (1005)
R1331	1-208-935-81	s RES, CHIP 100K (1005)
R1332	1-208-935-81	s RES, CHIP 100K (1005)
R1333	1-208-943-81	s RES, CHIP 220K (1005)
R1334	1-208-935-81	s RES, CHIP 100K (1005)
R1335	1-208-935-81	s RES, CHIP 100K (1005)
R1336	1-208-935-81	s RES, CHIP 100K (1005)
R1337	1-208-935-81	s RES, CHIP 100K (1005)
R1338	1-208-935-81	s RES, CHIP 100K (1005)
R1339	1-208-935-81	s RES, CHIP 100K (1005)
R1340	1-208-935-81	s RES, CHIP 100K (1005)
R1341	1-208-919-81	s RES, CHIP 22K (1005)
R1342	1-208-855-81	s RES, CHIP 47 (1005)
R1343	1-208-903-81	s RES, CHIP 4.7K (1005)
R1345	1-208-903-81	s RES, CHIP 4.7K (1005)
R1346	1-208-903-81	s RES, CHIP 4.7K (1005)
R1347	1-208-907-81	s RES, CHIP 6.8K (1005)
R1348	1-208-863-81	s RES, CHIP 100 (1005)
R1349	1-208-887-81	s RES, CHIP 1.0K (1005)
R1350	1-208-959-81	s RES, CHIP 1M (1005)
R1351	1-208-863-81	s RES, CHIP 100 (1005)
R1352	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1354	1-208-927-81	s RES, CHIP 47K (1005)
R1355	1-208-915-81	s RES, CHIP 15K (1005)
R1357	1-208-959-81	s RES, CHIP 1M (1005)
R1358	1-208-959-81	s RES, CHIP 1M (1005)
R1359	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1360	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1361	1-208-935-81	s RES, CHIP 100K (1005)
R1362	1-208-935-81	s RES, CHIP 100K (1005)
R1363	1-208-911-81	s RES, CHIP 10K (1005)
R1364	1-208-911-81	s RES, CHIP 10K (1005)
R1365	1-208-943-81	s RES, CHIP 220K (1005)
R1366	1-208-927-81	s RES, CHIP 47K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1367	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1368	1-208-887-81	s RES, CHIP 1.0K (1005)
R1369	1-208-891-81	s RES, CHIP 1.5K (1005)
R1371	1-208-935-81	s RES, CHIP 100K (1005)
R1372	1-208-863-81	s RES, CHIP 100 (1005)
R1373	1-220-870-81	s RES, CHIP 10 (1005)
R1374	1-208-903-81	s RES, CHIP 4.7K (1005)
R1375	1-208-903-81	s RES, CHIP 4.7K (1005)
R1376	1-208-943-81	s RES, CHIP 220K (1005)
R1377	1-208-863-81	s RES, CHIP 100 (1005)
R1378	1-208-903-81	s RES, CHIP 4.7K (1005)
R1379	1-208-903-81	s RES, CHIP 4.7K (1005)
R1380	1-208-903-81	s RES, CHIP 4.7K (1005)
R1381	1-208-903-81	s RES, CHIP 4.7K (1005)
R1382	1-208-911-81	s RES, CHIP 10K (1005)
R1383	1-208-911-81	s RES, CHIP 10K (1005)
R1384	1-208-903-81	s RES, CHIP 4.7K (1005)
R1385	1-208-903-81	s RES, CHIP 4.7K (1005)
R1386	1-208-863-81	s RES, CHIP 100 (1005)
R1387	1-208-863-81	s RES, CHIP 100 (1005)
R1388	1-208-863-81	s RES, CHIP 100 (1005)
R1389	1-208-863-81	s RES, CHIP 100 (1005)
R1391	1-208-887-81	s RES, CHIP 1.0K (1005)
R1392	1-208-959-81	s RES, CHIP 1M (1005)
R1393	1-208-943-81	s RES, CHIP 220K (1005)
R1395	1-208-903-81	s RES, CHIP 4.7K (1005)
R1396	1-208-903-81	s RES, CHIP 4.7K (1005)
R1397	1-208-903-81	s RES, CHIP 4.7K (1005)
R1398	1-208-927-81	s RES, CHIP 47K (1005)
R1399	1-208-927-81	s RES, CHIP 47K (1005)
R1401	1-208-863-81	s RES, CHIP 100 (1005)
R1402	1-208-927-81	s RES, CHIP 47K (1005)
R1501	1-208-863-81	s RES, CHIP 100 (1005)
R1502	1-208-903-81	s RES, CHIP 4.7K (1005)
R1503	1-208-863-81	s RES, CHIP 100 (1005)
R1505	1-208-903-81	s RES, CHIP 4.7K (1005)
R1506	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1507	1-208-863-81	s RES, CHIP 100 (1005)
R1508	1-208-923-81	s RES, CHIP 33K (1005)
R1509	1-208-879-81	s RES, CHIP 470 (1005)
R1510	1-208-867-81	s RES, CHIP 150 (1005)
R1511	1-208-895-81	s RES, CHIP 2.2K (1005)
R1512	1-208-899-81	s RES, CHIP 3.3K (1005)
R1513	1-208-899-81	s RES, CHIP 3.3K (1005)
R1514	1-208-879-81	s RES, CHIP 470 (1005)
R1515	1-208-875-81	s RES, CHIP 330 (1005)
R1516	1-208-863-81	s RES, CHIP 100 (1005)
R1517	1-208-883-81	s RES, CHIP 680 (1005)
R1518	1-208-911-81	s RES, CHIP 10K (1005)
R1519	1-208-871-81	s RES, CHIP 220 (1005)
R1521	1-208-887-81	s RES, CHIP 1.0K (1005)
R1522	1-208-907-81	s RES, CHIP 6.8K (1005)
R1523	1-208-879-81	s RES, CHIP 470 (1005)
R1524	1-220-878-81	s RES, CHIP 22 (1005)
R1525	1-208-863-81	s RES, CHIP 100 (1005)
R1526	1-208-863-81	s RES, CHIP 100 (1005)
R1527	1-208-863-81	s RES, CHIP 100 (1005)
R1528	1-208-863-81	s RES, CHIP 100 (1005)
R1529	1-208-903-81	s RES, CHIP 4.7K (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1530	1-208-935-81	s RES, CHIP 100K (1005)
R1531	1-220-878-81	s RES, CHIP 22 (1005)
R1532	1-220-870-81	s RES, CHIP 10 (1005)
R1533	1-220-878-81	s RES, CHIP 22 (1005)
R1535	1-208-871-81	s RES, CHIP 220 (1005)
R1536	1-208-863-81	s RES, CHIP 100 (1005)
R1539	1-220-878-81	s RES, CHIP 22 (1005)
R1540	1-220-878-81	s RES, CHIP 22 (1005)
R1541	1-208-887-81	s RES, CHIP 1.0K (1005)
R1542	1-208-955-81	s RES, CHIP 680K (1005)
R1543	1-208-891-81	s RES, CHIP 1.5K (1005)
R1544	1-208-855-81	s RES, CHIP 47 (1005)
R1545	1-208-903-81	s RES, CHIP 4.7K (1005)
R1546	1-208-903-81	s RES, CHIP 4.7K (1005)
R1547	1-208-887-81	s RES, CHIP 1.0K (1005)
R1548	1-208-891-81	s RES, CHIP 1.5K (1005)
R1549	1-208-955-81	s RES, CHIP 680K (1005)
R1550	1-208-947-81	s RES, CHIP 330K (1005)
R1551	1-208-903-81	s RES, CHIP 4.7K (1005)
R1554	1-208-875-81	s RES, CHIP 330 (1005)
R1555	1-208-873-81	s RES, CHIP 270 (1005)
R1556	1-208-855-81	s RES, CHIP 47 (1005)
R1557	1-208-887-81	s RES, CHIP 1.0K (1005)
R1558	1-220-882-81	s RES, CHIP 33 (1005)
R1559	1-208-903-81	s RES, CHIP 4.7K (1005)
R1560	1-208-863-81	s RES, CHIP 100 (1005)
R1561	1-208-863-81	s RES, CHIP 100 (1005)
R1562	1-208-863-81	s RES, CHIP 100 (1005)
R1563	1-208-911-81	s RES, CHIP 10K (1005)
R1564	1-208-911-81	s RES, CHIP 10K (1005)
R1565	1-220-878-81	s RES, CHIP 22 (1005)
R1566	1-208-903-81	s RES, CHIP 4.7K (1005)
R1567	1-208-863-81	s RES, CHIP 100 (1005)
R1568	1-208-863-81	s RES, CHIP 100 (1005)
R1569	1-208-863-81	s RES, CHIP 100 (1005)
R1570	1-208-863-81	s RES, CHIP 100 (1005)
R1571	1-220-878-81	s RES, CHIP 22 (1005)
R1572	1-208-887-81	s RES, CHIP 1.0K (1005)
R1573	1-208-891-81	s RES, CHIP 1.5K (1005)
R1574	1-208-903-81	s RES, CHIP 4.7K (1005)
R1575	1-208-903-81	s RES, CHIP 4.7K (1005)
R1576	1-208-887-81	s RES, CHIP 1.0K (1005)
R1577	1-208-891-81	s RES, CHIP 1.5K (1005)
R1578	1-208-863-81	s RES, CHIP 100 (1005)
R1579	1-208-863-81	s RES, CHIP 100 (1005)
R1580	1-208-860-81	s RES, CHIP 75 (1005)
R1581	1-208-923-81	s RES, CHIP 33K (1005)
R1582	1-208-860-81	s RES, CHIP 75 (1005)
R1583	1-208-959-81	s RES, CHIP 1M (1005)
R1584	1-208-887-81	s RES, CHIP 1.0K (1005)
R1585	1-208-899-81	s RES, CHIP 3.3K (1005)
R1586	1-208-919-81	s RES, CHIP 22K (1005)
R1587	1-208-923-81	s RES, CHIP 33K (1005)
R1588	1-208-923-81	s RES, CHIP 33K (1005)
R1589	1-208-895-81	s RES, CHIP 2.2K (1005)
R1590	1-208-959-81	s RES, CHIP 1M (1005)
R1591	1-208-911-81	s RES, CHIP 10K (1005)
R1592	1-208-927-81	s RES, CHIP 47K (1005)
R1593	1-208-855-81	s RES, CHIP 47 (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1594	1-208-935-81	s RES, CHIP 100K (1005)
R1595	1-208-895-81	s RES, CHIP 2.2K (1005)
R1596	1-208-855-81	s RES, CHIP 47 (1005)
R1597	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1598	1-208-935-81	s RES, CHIP 100K (1005)
R1599	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1600	1-208-887-81	s RES, CHIP 1.0K (1005)
R1601	1-208-903-81	s RES, CHIP 4.7K (1005)
R1602	1-208-895-81	s RES, CHIP 2.2K (1005)
R1603	1-208-883-81	s RES, CHIP 680 (1005)
R1604	1-208-887-81	s RES, CHIP 1.0K (1005)
R1605	1-208-903-81	s RES, CHIP 4.7K (1005)
R1606	1-208-899-81	s RES, CHIP 3.3K (1005)
R1607	1-208-899-81	s RES, CHIP 3.3K (1005)
R1608	1-208-899-81	s RES, CHIP 3.3K (1005)
R1609	1-208-875-81	s RES, CHIP 330 (1005)
R1610	1-208-895-81	s RES, CHIP 2.2K (1005)
R1611	1-208-895-81	s RES, CHIP 2.2K (1005)
R1612	1-208-875-81	s RES, CHIP 330 (1005)
R1613	1-208-887-81	s RES, CHIP 1.0K (1005)
R1614	1-208-903-81	s RES, CHIP 4.7K (1005)
R1615	1-208-887-81	s RES, CHIP 1.0K (1005)
R1616	1-208-903-81	s RES, CHIP 4.7K (1005)
R1617	1-208-883-81	s RES, CHIP 680 (1005)
R1618	1-208-875-81	s RES, CHIP 330 (1005)
R1619	1-208-887-81	s RES, CHIP 1.0K (1005)
R1620	1-208-871-81	s RES, CHIP 220 (1005)
R1621	1-208-871-81	s RES, CHIP 220 (1005)
R1622	1-208-871-81	s RES, CHIP 220 (1005)
R1623	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1624	1-220-878-81	s RES, CHIP 22 (1005)
R1626	1-208-863-81	s RES, CHIP 100 (1005)
R1627	1-208-860-81	s RES, CHIP 75 (1005)
R1628	1-208-903-81	s RES, CHIP 4.7K (1005)
R1629	1-220-878-81	s RES, CHIP 22 (1005)
R1630	1-220-878-81	s RES, CHIP 22 (1005)
R1631	1-208-887-81	s RES, CHIP 1.0K (1005)
R1632	1-208-891-81	s RES, CHIP 1.5K (1005)
R1633	1-208-903-81	s RES, CHIP 4.7K (1005)
R1634	1-208-887-81	s RES, CHIP 1.0K (1005)
R1635	1-208-903-81	s RES, CHIP 4.7K (1005)
R1636	1-208-891-81	s RES, CHIP 1.5K (1005)
R1637	1-208-903-81	s RES, CHIP 4.7K (1005)
R1638	1-208-903-81	s RES, CHIP 4.7K (1005)
R1639	1-208-887-81	s RES, CHIP 1.0K (1005)
R1640	1-208-891-81	s RES, CHIP 1.5K (1005)
R1642	1-208-879-81	s RES, CHIP 470 (1005)
R1643	1-208-887-81	s RES, CHIP 1.0K (1005)
R1644	1-208-891-81	s RES, CHIP 1.5K (1005)
R1645	1-220-878-81	s RES, CHIP 22 (1005)
R1646	1-208-903-81	s RES, CHIP 4.7K (1005)
R1647	1-220-878-81	s RES, CHIP 22 (1005)
R1648	1-208-887-81	s RES, CHIP 1.0K (1005)
R1649	1-208-891-81	s RES, CHIP 1.5K (1005)
R1650	1-208-903-81	s RES, CHIP 4.7K (1005)
R1651	1-208-903-81	s RES, CHIP 4.7K (1005)
R1652	1-208-887-81	s RES, CHIP 1.0K (1005)
R1653	1-208-891-81	s RES, CHIP 1.5K (1005)
R1654	1-208-860-81	s RES, CHIP 75 (1005)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB506	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB600	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB601	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB602	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB603	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB604	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB605	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB609	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB610	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB611	1-234-373-21	s	RES, NETWORK 220 (1005X4)
RB612	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB613	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB619	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB800	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB801	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB803	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB804	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB805	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB806	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB807	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB808	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB809	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB810	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB811	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB812	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB813	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB814	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB815	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB816	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB817	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB818	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB819	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB820	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB821	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB822	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB823	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB824	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB825	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB826	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB827	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB828	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB829	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB830	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB831	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB832	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB833	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB834	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB835	1-234-371-21	s	RES, NETWORK 47 (1005X4)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description		
RB1014	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1015	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1016	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1018	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1019	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1020	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1021	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1022	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1023	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1024	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1025	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1026	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1027	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1028	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1029	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1030	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1031	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1032	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1033	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1034	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1035	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1036	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1037	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1038	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1039	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1045	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1046	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1047	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1048	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1100	1-234-375-21	s	RES, NETWORK	1K	(1005X4)
RB1101	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1104	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1105	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1106	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1107	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1108	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1109	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1110	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1111	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1112	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1113	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1115	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1116	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1117	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1118	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1119	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1120	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1300	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1301	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1302	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1309	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1313	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1328	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1329	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1330	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1331	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1332	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1333	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1334	1-234-372-21	s	RES, NETWORK	100	(1005X4)

(DCP-44 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB1335	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB1336	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1337	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1338	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1339	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1340	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB1341	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1503	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1504	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1505	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1506	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1507	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1509	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1514	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1515	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1516	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP400	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1300	1-535-877-22	s	CHIP, CHECKER
TP1500	1-535-877-22	s	CHIP, CHECKER
VDR1	1-802-245-11	s	ESD SUPPRESSOR
VDR2	1-802-245-11	s	ESD SUPPRESSOR
VDR3	1-802-245-11	s	ESD SUPPRESSOR
VDR4	1-802-245-11	s	ESD SUPPRESSOR
X400	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO) 3.3V

DCP-44 BOARD (suffix 13)

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-883-B	s	MOUNTED CIRCUIT BOARD, DCP-44
3pcs	3-855-938-01	s	SCREW
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C240	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C273	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
C275	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C279	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C281	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C304	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C305	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C313	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C325	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C326	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C327	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C329	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C330	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C331	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C338	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C339	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C340	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C341	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C343	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C345	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C348	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C349	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C350	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C352	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C355	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C363	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C364	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C365	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C366	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C370	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C371	1-165-989-91	s CAP, CERAMIC 10MF (2012)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
C372	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C373	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C374	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C375	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C376	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C377	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C379	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C380	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C381	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C382	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C383	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C384	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C385	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C386	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C387	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C388	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C389	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C400	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C401	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C402	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C403	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C404	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C405	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C406	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C407	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C408	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C412	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C417	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C418	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C419	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C420	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C421	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C422	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C423	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C424	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C428	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C429	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C430	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C431	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C432	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C433	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C436	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C441	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C442	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
C444	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C445	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C446	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C447	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C448	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C449	1-164-840-81	s	CAP, CHIP CERAMIC 1PF CK 1005
C451	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C452	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C455	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C458	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C460	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C461	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C463	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C464	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C465	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C466	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C467	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C468	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C469	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C470	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C471	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C472	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C473	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C474	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C475	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C476	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C477	1-112-015-91	s	CAP, CHIP CERAMIC 47MF B 3225
C478	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C479	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C480	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C481	1-127-956-21	s	CAP, CHIP FILM 0.1MF (3225)
C482	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C483	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C484	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C485	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C486	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C487	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C488	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C489	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C491	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C492	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C493	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C494	1-100-880-91	s	CAP, CERAMIC 100MF C (3225)
C500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C601	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C625	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C626	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C627	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C628	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C629	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C630	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C631	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C632	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C633	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C634	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C635	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C636	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C637	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C638	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C639	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C640	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C641	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C642	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C643	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C644	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C645	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C646	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C647	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
C723	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C724	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C725	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C737	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C738	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C739	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C740	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C741	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C742	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C743	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C744	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C745	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C746	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C747	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C750	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C753	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C754	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C755	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C756	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C757	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C758	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C759	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C760	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C761	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C762	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C763	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C765	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C766	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C800	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C801	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C802	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C803	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C804	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C805	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C806	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C810	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
C875	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C876	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C877	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C878	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C880	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C881	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C882	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C883	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C884	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C885	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C886	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C887	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C888	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C889	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C890	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C891	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C892	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C893	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C894	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C895	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C896	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C897	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C898	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C899	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C900	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C901	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C902	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C903	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C904	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C905	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C906	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C907	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C908	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C915	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C916	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C921	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-100-421-21	s	ELECT 220MF (6.3X5.9)
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
C1112	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1114	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1117	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1118	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1119	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1120	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1121	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1122	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1123	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1129	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1134	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1135	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1136	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1137	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1138	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1140	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1141	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1142	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1143	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1144	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1145	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1146	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1147	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1148	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1153	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1154	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1155	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1156	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1157	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1158	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1159	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1160	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1161	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1162	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1165	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1166	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1167	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1168	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1169	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1172	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1173	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1174	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1177	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1178	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1180	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1181	1-112-746-91 s	CAP, CERAMIC 4.7MF B (1608)
C1183	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1184	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1185	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1186	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1187	1-164-874-81 s	CAP,CHIP CERAMIC 100PF CH 1005
C1188	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1189	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
C1302	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1303	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1304	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1305	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1306	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1307	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1308	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1309	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1310	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1311	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1312	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1315	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1316	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1317	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1318	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1321	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1322	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1323	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1324	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1325	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1326	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1327	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1328	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1329	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1330	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1331	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1332	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1333	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1334	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1335	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1336	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1339	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1340	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1341	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C1342	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1345	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1346	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1347	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1348	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1349	1-115-339-91 s	CAP, CERAMIC 0.1MF B (2012)
C1350	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-115-339-91 s	CAP, CERAMIC 0.1MF B (2012)
C1353	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1355	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1356	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1357	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1359	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C1361	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
C1516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1533	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1539	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1545	1-164-860-81	s	CAP, CHIP CERAMIC 27PF CH 1005
C1546	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1551	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1562	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1563	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1567	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1570	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1576	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1577	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1578	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1579	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
C1580	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C1581	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1582	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1583	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1584	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1585	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1586	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1587	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1588	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1589	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1590	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C1591	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1592	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1593	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1594	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1595	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1596	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1597	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1599	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1605	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1606	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1608	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1612	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1617	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1618	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1619	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1620	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1622	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1623	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1624	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1625	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C1626	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C1627	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1628	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C1629	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1630	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1631	1-164-845-81	s CAP, CHIP CERAMIC 5PF CH 1005
C1632	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C1633	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1634	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1635	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1636	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1637	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-164-862-81	s CAP, CHIP CERAMIC 33PF CH 1005
C1639	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C1640	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C1641	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C1642	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1643	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
C1644	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN2	1-818-579-91	s CONNECTOR, BOARD TO BOARD(60P)
CN3	1-691-591-21	o PIN, CONNECTOR (1.5MM) (SMD)8P
CN10	1-764-243-31	o CONNECTOR (COAXIAL)
CN11	1-764-243-31	o CONNECTOR (COAXIAL)
CN12	1-764-243-31	o CONNECTOR (COAXIAL)
CN13	1-764-243-31	o CONNECTOR (COAXIAL)
CN14	1-764-243-31	o CONNECTOR (COAXIAL)
CN15	1-764-243-31	o CONNECTOR (COAXIAL)
CN100	1-784-254-21	s CONNECTOR 10P
D1	8-719-069-28	s DIODE 1SS400TE-61
D200	8-719-989-04	s DIODE DAN222-TL
D400	8-719-083-60	s DI UDZSNPTE-174.7B
D401	8-719-083-60	s DI UDZSNPTE-174.7B
D402	8-719-083-60	s DI UDZSNPTE-174.7B
D403	8-719-083-60	s DI UDZSNPTE-174.7B
D404	8-719-989-01	s DIODE DA221-TL
D405	8-719-989-01	s DIODE DA221-TL
D500	8-719-991-01	s DIODE DAP222-TL
D501	8-719-991-01	s DIODE DAP222-TL
D1300	8-719-991-01	s DIODE DAP222-TL
D1301	8-719-991-01	s DIODE DAP222-TL
D1500	8-719-989-04	s DIODE DAN222-TL
E201	1-535-877-22	s CHIP, CHECKER
E400	1-535-877-22	s CHIP, CHECKER
E1000	1-535-877-22	s CHIP, CHECKER
E1001	1-535-877-22	s CHIP, CHECKER
E1002	1-535-877-22	s CHIP, CHECKER
E1003	1-535-877-22	s CHIP, CHECKER
FB202	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB300	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB301	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB302	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB303	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB304	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB305	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB800	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB803	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB804	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB805	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB806	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB807	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB808	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB809	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB810	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB811	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB812	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB813	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB814	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1300	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1301	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1302	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1303	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1304	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1305	1-400-462-21	s FERRITE, EMI (SMD) (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
FB1306	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1307	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1308	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1309	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1310	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1311	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1312	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1313	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1314	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1315	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1316	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1317	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1318	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1319	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1320	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1321	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB1322	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FL300	1-813-541-11	s	FILTER, LOW PASS
FL301	1-813-541-11	s	FILTER, LOW PASS
FL302	1-813-541-11	s	FILTER, LOW PASS
FL1500	1-233-742-21	s	FILTER, LOW PASS
IC1	6-706-476-01	s	IC TC7SET04FU (T5RSOJF)
IC2	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC4	8-759-346-27	s	IC LM45BIM3X
IC6	8-759-327-01	s	IC NJM062V (TE2)
IC8	6-712-526-01	s	IC CAT24C32WI-GT3 (E)
IC9	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC10	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC14	6-704-350-01	s	IC SN74LVC1G66DCKR
IC16	6-704-350-01	s	IC SN74LVC1G66DCKR
IC19	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC200	6-711-696-01	s	IC CY62256VNNL-70ZXCT
IC202	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC203	8-759-672-76	s	IC AK9813BF-E2
IC210	6-700-225-01	s	IC TC74VCX157FT (EL)
IC220	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC222	8-759-669-67	s	IC TL074CPWR-12
IC223	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC224	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC225	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC226	6-707-414-01	s	IC DS90LV011ATMF
IC227	6-707-414-01	s	IC DS90LV011ATMF
IC228	6-711-852-01	s	IC LTC1844ES5-BYP
IC229	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC230	6-711-852-01	s	IC LTC1844ES5-BYP
IC301	6-707-884-01	s	IC TC74VHCT04AFT (EKJ)
IC303	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC304	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC305	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC306	8-759-675-54	s	IC TC7W53FK (TE85R)
IC307	8-759-675-54	s	IC TC7W53FK (TE85R)
IC308	8-759-675-54	s	IC TC7W53FK (TE85R)
IC312	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC313	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC314	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC318	6-711-361-01	s	IC LTC2249CUH#TR
IC319	6-711-361-01	s	IC LTC2249CUH#TR
IC320	6-711-361-01	s	IC LTC2249CUH#TR

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
IC322	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC323	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC324	6-704-350-01	s	IC SN74LVC1G66DCKR
IC325	6-704-350-01	s	IC SN74LVC1G66DCKR
IC326	6-704-350-01	s	IC SN74LVC1G66DCKR
IC331	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC332	8-759-592-44	s	IC TC7SZ04FU (TE85R)
IC333	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC336	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC337	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC338	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC400	8-759-327-01	s	IC NJM062V (TE2)
IC401	6-704-976-01	s	IC AD8014ARTZ-REEL7
IC402	8-759-327-01	s	IC NJM062V (TE2)
IC403	8-759-327-01	s	IC NJM062V (TE2)
IC404	8-759-485-24	s	IC MC74HC4046ADTR2
IC406	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC407	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC408	8-759-675-54	s	IC TC7W53FK (TE85R)
IC410	8-759-675-47	s	IC SN74LVC04APWR
IC411	6-701-877-01	s	IC SM8707EV-G-E2
IC412	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC413	6-706-136-01	s	IC LTC3412EFE#TR
IC414	6-706-136-01	s	IC LTC3412EFE#TR
IC415	8-759-675-54	s	IC TC7W53FK (TE85R)
IC416	6-711-852-01	s	IC LTC1844ES5-BYP
IC417	8-759-327-01	s	IC NJM062V (TE2)
IC418	8-759-669-66	s	IC TLC272CPWR-12
IC419	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC501	6-706-088-01	s	IC UPD6467GR-560-E2
IC502	6-706-088-01	s	IC UPD6467GR-560-E2
IC503	6-706-088-01	s	IC UPD6467GR-560-E2
IC504	6-706-088-01	s	IC UPD6467GR-560-E2
IC506	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC507	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC508	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC801	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC901	6-713-495-01	s	IC W9864G2GH-6-W-ER10
IC902	6-713-495-01	s	IC W9864G2GH-6-W-ER10
IC1102	8-759-669-43	s	IC SN74LVC157APWR-12
IC1104	6-712-298-01	s	IC GS1524ACKDE3
IC1105	6-705-968-01	s	IC S-89431ACNC-HBV-TFG
IC1109	6-711-946-01	s	IC GS1528BCKAE3
IC1112	6-711-946-01	s	IC GS1528BCKAE3
IC1113	6-711-946-01	s	IC GS1528BCKAE3
IC1116	6-706-220-01	s	IC LTC3411EMS#TR
IC1119	6-702-481-01	s	IC PCA9555DB-118
IC1120	6-707-891-01	s	IC TC74VHCT245AFT (EKJ)
IC1121	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC1300	6-706-220-01	s	IC LTC3411EMS#TR
IC1301	6-706-220-01	s	IC LTC3411EMS#TR
IC1302	6-706-220-01	s	IC LTC3411EMS#TR
IC1303	6-706-220-01	s	IC LTC3411EMS#TR
IC1304	8-759-337-40	s	IC NJM2904V (TE2)
IC1305	6-708-346-01	s	IC DAC7512N
IC1306	6-707-891-01	s	IC TC74VHCT245AFT (EKJ)
IC1308	8-759-669-43	s	IC SN74LVC157APWR-12
IC1310	6-706-136-01	s	IC LTC3412EFE#TR

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
IC1311	6-703-848-01	s IC SN74CB3T3306DCUR
IC1312	6-703-848-01	s IC SN74CB3T3306DCUR
IC1313	6-706-220-01	s IC LTC3411EMS#TR
IC1314	8-759-592-47	s IC TC7SZ08FU (TE85R)
IC1315	8-759-592-47	s IC TC7SZ08FU (TE85R)
IC1316	8-759-592-47	s IC TC7SZ08FU (TE85R)
IC1500	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1501	8-759-669-66	s IC TLC272CPWR-12
IC1502	8-759-675-54	s IC TC7W53FK (TE85R)
IC1503	8-759-669-66	s IC TLC272CPWR-12
IC1504	8-759-327-14	s IC TL712CPSR
IC1505	8-759-327-14	s IC TL712CPSR
IC1506	6-704-350-01	s IC SN74LVC1G66DCKR
IC1508	6-704-350-01	s IC SN74LVC1G66DCKR
IC1509	6-704-350-01	s IC SN74LVC1G66DCKR
IC1511	8-759-398-57	s IC LM1881MX NOPB
IC1512	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC1513	6-706-471-01	s IC THS5661AIPWR
IC1514	6-707-865-01	s IC TC74VHC125FT (EKJ)
IC1515	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1516	8-759-327-01	s IC NJM062V (TE2)
IC1517	6-704-350-01	s IC SN74LVC1G66DCKR
IC1518	6-707-997-01	s IC ADV7320KSTZ
IC1519	6-704-350-01	s IC SN74LVC1G66DCKR
IC1520	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1521	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1522	8-759-672-76	s IC AK9813BF-E2
IC1523	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1524	6-707-997-01	s IC ADV7320KSTZ
IC1525	6-707-997-01	s IC ADV7320KSTZ
IC1526	6-704-350-01	s IC SN74LVC1G66DCKR
IC1527	6-704-350-01	s IC SN74LVC1G66DCKR
IC1528	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1529	8-759-675-54	s IC TC7W53FK (TE85R)
IC1530	8-759-675-54	s IC TC7W53FK (TE85R)
IC1531	6-704-350-01	s IC SN74LVC1G66DCKR
IC1532	6-706-484-01	s IC TC7SH04FU (T5RSOYJF)
IC1533	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1534	6-704-350-01	s IC SN74LVC1G66DCKR
L200	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L400	1-416-344-21	s COIL, CHOKE 10UH
L401	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L402	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L403	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L404	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L405	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L406	1-424-723-21	s COIL, CHOKE 1.0UH
L407	1-424-723-21	s COIL, CHOKE 1.0UH
L408	1-416-344-21	s COIL, CHOKE 10UH
L409	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L410	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L411	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L412	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L413	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L414	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L416	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L417	1-414-398-41	s INDUCTOR (SMD) 10.0UH

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
L600	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L604	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L605	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L800	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L801	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L802	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L803	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L804	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L805	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L806	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1100	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1103	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1104	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1106	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1107	1-419-630-21	s COIL, CHOKE 4.7UH
L1300	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1301	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1302	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1303	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1306	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1307	1-419-630-21	s COIL, CHOKE 4.7UH
L1500	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1501	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1504	1-412-947-21	s INDUCTOR 4.7UH (2520)
L1505	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1506	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1507	1-412-981-41	s INDUCTOR, SMALL TYPE 1.5UH
L1508	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1510	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1511	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1512	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1513	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1514	1-412-979-41	s INDUCTOR, SMALL TYPE 1.0UH
L1515	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1516	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1517	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1518	1-412-947-21	s INDUCTOR 4.7UH (2520)
L1519	1-412-979-41	s INDUCTOR, SMALL TYPE 1.0UH
L1520	1-412-979-41	s INDUCTOR, SMALL TYPE 1.0UH
L1521	1-412-955-21	s INDUCTOR, SMALL TYPE 22UH 2520
Q300	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q301	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q400	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q401	6-550-632-01	s TRANSISTOR 2SC4672-T100-Q
Q402	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q404	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q405	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q406	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q408	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q409	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q410	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q414	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q501	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q505	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q506	8-729-928-28	s TRANSISTOR DTA144EE-TL

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
Q1105	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1106	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1107	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1108	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1301	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1500	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1501	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1503	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1504	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1505	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1506	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1507	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1509	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1510	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1511	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1512	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q1513	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1514	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q1515	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-208-855-81	s	RES, CHIP 47 (1005)
R4	1-208-855-81	s	RES, CHIP 47 (1005)
R5	1-208-855-81	s	RES, CHIP 47 (1005)
R6	1-208-855-81	s	RES, CHIP 47 (1005)
R7	1-208-855-81	s	RES, CHIP 47 (1005)
R8	1-208-855-81	s	RES, CHIP 47 (1005)
R9	1-208-855-81	s	RES, CHIP 47 (1005)
R10	1-208-855-81	s	RES, CHIP 47 (1005)
R11	1-208-855-81	s	RES, CHIP 47 (1005)
R12	1-208-855-81	s	RES, CHIP 47 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-208-855-81	s	RES, CHIP 47 (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)
R22	1-208-855-81	s	RES, CHIP 47 (1005)
R23	1-208-855-81	s	RES, CHIP 47 (1005)
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-935-81	s	RES, CHIP 100K (1005)
R29	1-208-863-81	s	RES, CHIP 100 (1005)
R30	1-208-863-81	s	RES, CHIP 100 (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R33	1-208-887-81	s	RES, CHIP 1.0K (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-863-81	s	RES, CHIP 100 (1005)
R41	1-208-855-81	s	RES, CHIP 47 (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
R42	1-208-855-81	s	RES, CHIP 47 (1005)
R51	1-208-855-81	s	RES, CHIP 47 (1005)
R52	1-208-855-81	s	RES, CHIP 47 (1005)
R53	1-208-855-81	s	RES, CHIP 47 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R57	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-208-919-81	s	RES, CHIP 22K (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-879-81	s	RES, CHIP 470 (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-879-81	s	RES, CHIP 470 (1005)
R210	1-208-895-81	s	RES, CHIP 2.2K (1005)
R211	1-208-879-81	s	RES, CHIP 470 (1005)
R213	1-208-860-81	s	RES, CHIP 75 (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-860-81	s	RES, CHIP 75 (1005)
R216	1-208-860-81	s	RES, CHIP 75 (1005)
R217	1-208-895-81	s	RES, CHIP 2.2K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-923-81	s	RES, CHIP 33K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-871-81	s	RES, CHIP 220 (1005)
R228	1-208-875-81	s	RES, CHIP 330 (1005)
R229	1-208-895-81	s	RES, CHIP 2.2K (1005)
R230	1-220-870-81	s	RES, CHIP 10 (1005)
R231	1-208-935-81	s	RES, CHIP 100K (1005)
R232	1-208-879-81	s	RES, CHIP 470 (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-935-81	s	RES, CHIP 100K (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R243	1-208-935-81	s	RES, CHIP 100K (1005)
R247	1-220-878-81	s	RES, CHIP 22 (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-220-878-81	s	RES, CHIP 22 (1005)
R254	1-220-878-81	s	RES, CHIP 22 (1005)
R255	1-220-878-81	s	RES, CHIP 22 (1005)
R259	1-220-878-81	s	RES, CHIP 22 (1005)
R260	1-220-878-81	s	RES, CHIP 22 (1005)
R261	1-208-855-81	s	RES, CHIP 47 (1005)
R262	1-220-878-81	s	RES, CHIP 22 (1005)
R264	1-208-855-81	s	RES, CHIP 47 (1005)
R265	1-208-855-81	s	RES, CHIP 47 (1005)
R266	1-208-855-81	s	RES, CHIP 47 (1005)
R267	1-208-855-81	s	RES, CHIP 47 (1005)
R268	1-208-855-81	s	RES, CHIP 47 (1005)
R269	1-208-887-81	s	RES, CHIP 1.0K (1005)
R270	1-208-887-81	s	RES, CHIP 1.0K (1005)
R271	1-208-887-81	s	RES, CHIP 1.0K (1005)
R272	1-208-887-81	s	RES, CHIP 1.0K (1005)
R273	1-208-887-81	s	RES, CHIP 1.0K (1005)
R274	1-208-879-81	s	RES, CHIP 470 (1005)
R275	1-220-870-81	s	RES, CHIP 10 (1005)
R276	1-220-870-81	s	RES, CHIP 10 (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R277	1-220-870-81 s	RES, CHIP 10 (1005)
R278	1-220-878-81 s	RES, CHIP 22 (1005)
R279	1-220-878-81 s	RES, CHIP 22 (1005)
R280	1-208-915-81 s	RES, CHIP 15K (1005)
R281	1-208-911-81 s	RES, CHIP 10K (1005)
R282	1-208-935-81 s	RES, CHIP 100K (1005)
R283	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R284	1-208-887-81 s	RES, CHIP 1.0K (1005)
R285	1-208-887-81 s	RES, CHIP 1.0K (1005)
R286	1-208-895-81 s	RES, CHIP 2.2K (1005)
R287	1-208-863-81 s	RES, CHIP 100 (1005)
R288	1-208-863-81 s	RES, CHIP 100 (1005)
R289	1-208-871-81 s	RES, CHIP 220 (1005)
R290	1-208-899-81 s	RES, CHIP 3.3K (1005)
R291	1-208-895-81 s	RES, CHIP 2.2K (1005)
R292	1-208-927-81 s	RES, CHIP 47K (1005)
R293	1-208-863-81 s	RES, CHIP 100 (1005)
R294	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R295	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R296	1-208-863-81 s	RES, CHIP 100 (1005)
R297	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R298	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R308	1-208-879-81 s	RES, CHIP 470 (1005)
R311	1-208-879-81 s	RES, CHIP 470 (1005)
R313	1-208-879-81 s	RES, CHIP 470 (1005)
R319	1-208-879-81 s	RES, CHIP 470 (1005)
R321	1-208-879-81 s	RES, CHIP 470 (1005)
R323	1-208-879-81 s	RES, CHIP 470 (1005)
R324	1-208-887-81 s	RES, CHIP 1.0K (1005)
R325	1-208-887-81 s	RES, CHIP 1.0K (1005)
R326	1-208-887-81 s	RES, CHIP 1.0K (1005)
R327	1-208-887-81 s	RES, CHIP 1.0K (1005)
R328	1-208-887-81 s	RES, CHIP 1.0K (1005)
R329	1-208-887-81 s	RES, CHIP 1.0K (1005)
R331	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R332	1-208-887-81 s	RES, CHIP 1.0K (1005)
R333	1-208-887-81 s	RES, CHIP 1.0K (1005)
R334	1-208-887-81 s	RES, CHIP 1.0K (1005)
R335	1-208-887-81 s	RES, CHIP 1.0K (1005)
R337	1-208-887-81 s	RES, CHIP 1.0K (1005)
R338	1-208-887-81 s	RES, CHIP 1.0K (1005)
R339	1-208-895-81 s	RES, CHIP 2.2K (1005)
R340	1-208-911-81 s	RES, CHIP 10K (1005)
R341	1-208-919-81 s	RES, CHIP 22K (1005)
R345	1-208-875-81 s	RES, CHIP 330 (1005)
R346	1-208-875-81 s	RES, CHIP 330 (1005)
R347	1-208-875-81 s	RES, CHIP 330 (1005)
R348	1-208-903-81 s	RES, CHIP 4.7K (1005)
R349	1-208-903-81 s	RES, CHIP 4.7K (1005)
R350	1-208-903-81 s	RES, CHIP 4.7K (1005)
R351	1-208-903-81 s	RES, CHIP 4.7K (1005)
R352	1-208-903-81 s	RES, CHIP 4.7K (1005)
R353	1-208-903-81 s	RES, CHIP 4.7K (1005)
R354	1-208-935-81 s	RES, CHIP 100K (1005)
R356	1-208-935-81 s	RES, CHIP 100K (1005)
R358	1-208-935-81 s	RES, CHIP 100K (1005)
R359	1-208-859-81 s	RES, CHIP 68 (1005)
R360	1-208-859-81 s	RES, CHIP 68 (1005)
R361	1-208-859-81 s	RES, CHIP 68 (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R363	1-208-875-81 s	RES, CHIP 330 (1005)
R364	1-208-875-81 s	RES, CHIP 330 (1005)
R365	1-208-875-81 s	RES, CHIP 330 (1005)
R366	1-208-883-81 s	RES, CHIP 680 (1005)
R367	1-208-879-81 s	RES, CHIP 470 (1005)
R368	1-208-883-81 s	RES, CHIP 680 (1005)
R369	1-208-911-81 s	RES, CHIP 10K (1005)
R370	1-208-911-81 s	RES, CHIP 10K (1005)
R371	1-220-878-81 s	RES, CHIP 22 (1005)
R372	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R373	1-208-863-81 s	RES, CHIP 100 (1005)
R374	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R375	1-220-878-81 s	RES, CHIP 22 (1005)
R376	1-220-878-81 s	RES, CHIP 22 (1005)
R377	1-220-878-81 s	RES, CHIP 22 (1005)
R378	1-208-855-81 s	RES, CHIP 47 (1005)
R379	1-208-855-81 s	RES, CHIP 47 (1005)
R380	1-208-855-81 s	RES, CHIP 47 (1005)
R381	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R382	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R383	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R384	1-208-911-81 s	RES, CHIP 10K (1005)
R385	1-208-911-81 s	RES, CHIP 10K (1005)
R386	1-208-911-81 s	RES, CHIP 10K (1005)
R387	1-208-903-81 s	RES, CHIP 4.7K (1005)
R388	1-208-919-81 s	RES, CHIP 22K (1005)
R389	1-208-919-81 s	RES, CHIP 22K (1005)
R390	1-208-919-81 s	RES, CHIP 22K (1005)
R392	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R393	1-208-935-81 s	RES, CHIP 100K (1005)
R395	1-208-863-81 s	RES, CHIP 100 (1005)
R396	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R397	1-220-878-81 s	RES, CHIP 22 (1005)
R398	1-220-878-81 s	RES, CHIP 22 (1005)
R399	1-220-878-81 s	RES, CHIP 22 (1005)
R400	1-208-863-81 s	RES, CHIP 100 (1005)
R401	1-208-871-81 s	RES, CHIP 220 (1005)
R403	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R405	1-208-939-81 s	RES, CHIP 150K (1005)
R406	1-208-923-81 s	RES, CHIP 33K (1005)
R407	1-208-923-81 s	RES, CHIP 33K (1005)
R408	1-208-903-81 s	RES, CHIP 4.7K (1005)
R410	1-208-871-81 s	RES, CHIP 220 (1005)
R411	1-208-959-81 s	RES, CHIP 1M (1005)
R412	1-208-959-81 s	RES, CHIP 1M (1005)
R413	1-208-887-81 s	RES, CHIP 1.0K (1005)
R414	1-208-911-81 s	RES, CHIP 10K (1005)
R415	1-208-915-81 s	RES, CHIP 15K (1005)
R417	1-208-931-81 s	RES, CHIP 68K (1005)
R418	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R419	1-208-931-81 s	RES, CHIP 68K (1005)
R420	1-208-923-81 s	RES, CHIP 33K (1005)
R421	1-208-923-81 s	RES, CHIP 33K (1005)
R422	1-208-903-81 s	RES, CHIP 4.7K (1005)
R423	1-208-943-81 s	RES, CHIP 220K (1005)
R424	1-208-939-81 s	RES, CHIP 150K (1005)
R425	1-208-943-81 s	RES, CHIP 220K (1005)
R426	1-208-927-81 s	RES, CHIP 47K (1005)
R427	1-208-943-81 s	RES, CHIP 220K (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R428	1-208-927-81	s RES, CHIP 47K (1005)
R431	1-208-915-81	s RES, CHIP 15K (1005)
R432	1-208-911-81	s RES, CHIP 10K (1005)
R433	1-208-935-81	s RES, CHIP 100K (1005)
R434	1-208-911-81	s RES, CHIP 10K (1005)
R435	1-208-909-81	s RES, CHIP 8.2K (1005)
R436	1-208-931-81	s RES, CHIP 68K (1005)
R437	1-208-947-81	s RES, CHIP 330K (1005)
R438	1-208-911-81	s RES, CHIP 10K (1005)
R439	1-208-935-81	s RES, CHIP 100K (1005)
R440	1-208-915-81	s RES, CHIP 15K (1005)
R441	1-208-903-81	s RES, CHIP 4.7K (1005)
R442	1-208-903-81	s RES, CHIP 4.7K (1005)
R447	1-208-927-81	s RES, CHIP 47K (1005)
R448	1-208-915-81	s RES, CHIP 15K (1005)
R449	1-208-903-81	s RES, CHIP 4.7K (1005)
R450	1-208-919-81	s RES, CHIP 22K (1005)
R451	1-208-919-81	s RES, CHIP 22K (1005)
R452	1-208-903-81	s RES, CHIP 4.7K (1005)
R453	1-208-919-81	s RES, CHIP 22K (1005)
R454	1-208-931-81	s RES, CHIP 68K (1005)
R455	1-208-911-81	s RES, CHIP 10K (1005)
R456	1-208-863-81	s RES, CHIP 100 (1005)
R457	1-208-911-81	s RES, CHIP 10K (1005)
R458	1-208-863-81	s RES, CHIP 100 (1005)
R459	1-208-863-81	s RES, CHIP 100 (1005)
R460	1-208-863-81	s RES, CHIP 100 (1005)
R461	1-208-863-81	s RES, CHIP 100 (1005)
R462	1-208-863-81	s RES, CHIP 100 (1005)
R463	1-208-895-81	s RES, CHIP 2.2K (1005)
R464	1-208-895-81	s RES, CHIP 2.2K (1005)
R465	1-208-927-81	s RES, CHIP 47K (1005)
R466	1-208-915-81	s RES, CHIP 15K (1005)
R467	1-208-907-81	s RES, CHIP 6.8K (1005)
R468	1-208-895-81	s RES, CHIP 2.2K (1005)
R470	1-208-919-81	s RES, CHIP 22K (1005)
R471	1-208-911-81	s RES, CHIP 10K (1005)
R472	1-208-863-81	s RES, CHIP 100 (1005)
R473	1-208-927-81	s RES, CHIP 47K (1005)
R474	1-208-935-81	s RES, CHIP 100K (1005)
R475	1-208-927-81	s RES, CHIP 47K (1005)
R476	1-208-895-81	s RES, CHIP 2.2K (1005)
R477	1-208-887-81	s RES, CHIP 1.0K (1005)
R478	1-208-895-81	s RES, CHIP 2.2K (1005)
R479	1-208-911-81	s RES, CHIP 10K (1005)
R480	1-220-870-81	s RES, CHIP 10 (1005)
R481	1-208-911-81	s RES, CHIP 10K (1005)
R482	1-220-870-81	s RES, CHIP 10 (1005)
R483	1-208-919-81	s RES, CHIP 22K (1005)
R484	1-220-870-81	s RES, CHIP 10 (1005)
R487	1-208-911-81	s RES, CHIP 10K (1005)
R488	1-208-863-81	s RES, CHIP 100 (1005)
R489	1-220-870-81	s RES, CHIP 10 (1005)
R490	1-208-855-81	s RES, CHIP 47 (1005)
R491	1-208-863-81	s RES, CHIP 100 (1005)
R492	1-208-943-81	s RES, CHIP 220K (1005)
R500	1-208-863-81	s RES, CHIP 100 (1005)
R501	1-208-863-81	s RES, CHIP 100 (1005)
R502	1-208-911-81	s RES, CHIP 10K (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R503	1-208-911-81	s RES, CHIP 10K (1005)
R505	1-208-863-81	s RES, CHIP 100 (1005)
R506	1-208-863-81	s RES, CHIP 100 (1005)
R507	1-208-927-81	s RES, CHIP 47K (1005)
R508	1-208-927-81	s RES, CHIP 47K (1005)
R511	1-208-863-81	s RES, CHIP 100 (1005)
R513	1-208-863-81	s RES, CHIP 100 (1005)
R514	1-208-863-81	s RES, CHIP 100 (1005)
R515	1-208-863-81	s RES, CHIP 100 (1005)
R519	1-208-863-81	s RES, CHIP 100 (1005)
R520	1-208-863-81	s RES, CHIP 100 (1005)
R524	1-220-878-81	s RES, CHIP 22 (1005)
R526	1-220-878-81	s RES, CHIP 22 (1005)
R528	1-220-878-81	s RES, CHIP 22 (1005)
R537	1-208-863-81	s RES, CHIP 100 (1005)
R545	1-208-863-81	s RES, CHIP 100 (1005)
R600	1-208-863-81	s RES, CHIP 100 (1005)
R601	1-208-895-81	s RES, CHIP 2.2K (1005)
R602	1-208-895-81	s RES, CHIP 2.2K (1005)
R604	1-208-855-81	s RES, CHIP 47 (1005)
R605	1-208-855-81	s RES, CHIP 47 (1005)
R606	1-208-863-81	s RES, CHIP 100 (1005)
R607	1-208-863-81	s RES, CHIP 100 (1005)
R608	1-208-863-81	s RES, CHIP 100 (1005)
R609	1-208-855-81	s RES, CHIP 47 (1005)
R610	1-208-911-81	s RES, CHIP 10K (1005)
R611	1-208-863-81	s RES, CHIP 100 (1005)
R612	1-208-863-81	s RES, CHIP 100 (1005)
R613	1-208-863-81	s RES, CHIP 100 (1005)
R614	1-208-863-81	s RES, CHIP 100 (1005)
R615	1-208-863-81	s RES, CHIP 100 (1005)
R619	1-208-863-81	s RES, CHIP 100 (1005)
R800	1-208-863-81	s RES, CHIP 100 (1005)
R801	1-208-863-81	s RES, CHIP 100 (1005)
R802	1-208-863-81	s RES, CHIP 100 (1005)
R803	1-208-863-81	s RES, CHIP 100 (1005)
R804	1-208-863-81	s RES, CHIP 100 (1005)
R805	1-208-863-81	s RES, CHIP 100 (1005)
R806	1-208-911-81	s RES, CHIP 10K (1005)
R807	1-208-911-81	s RES, CHIP 10K (1005)
R808	1-208-863-81	s RES, CHIP 100 (1005)
R809	1-208-863-81	s RES, CHIP 100 (1005)
R810	1-208-863-81	s RES, CHIP 100 (1005)
R811	1-208-863-81	s RES, CHIP 100 (1005)
R812	1-208-911-81	s RES, CHIP 10K (1005)
R813	1-208-911-81	s RES, CHIP 10K (1005)
R814	1-208-911-81	s RES, CHIP 10K (1005)
R815	1-208-863-81	s RES, CHIP 100 (1005)
R816	1-208-863-81	s RES, CHIP 100 (1005)
R817	1-208-911-81	s RES, CHIP 10K (1005)
R818	1-208-911-81	s RES, CHIP 10K (1005)
R819	1-208-863-81	s RES, CHIP 100 (1005)
R820	1-208-863-81	s RES, CHIP 100 (1005)
R821	1-208-911-81	s RES, CHIP 10K (1005)
R822	1-208-863-81	s RES, CHIP 100 (1005)
R823	1-208-863-81	s RES, CHIP 100 (1005)
R824	1-208-911-81	s RES, CHIP 10K (1005)
R825	1-208-863-81	s RES, CHIP 100 (1005)
R826	1-208-863-81	s RES, CHIP 100 (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R827	1-208-911-81	s RES, CHIP 10K (1005)
R828	1-208-863-81	s RES, CHIP 100 (1005)
R829	1-208-863-81	s RES, CHIP 100 (1005)
R830	1-208-863-81	s RES, CHIP 100 (1005)
R1001	1-208-863-81	s RES, CHIP 100 (1005)
R1002	1-208-863-81	s RES, CHIP 100 (1005)
R1003	1-220-870-81	s RES, CHIP 10 (1005)
R1004	1-220-870-81	s RES, CHIP 10 (1005)
R1006	1-208-863-81	s RES, CHIP 100 (1005)
R1008	1-208-863-81	s RES, CHIP 100 (1005)
R1009	1-208-863-81	s RES, CHIP 100 (1005)
R1010	1-208-863-81	s RES, CHIP 100 (1005)
R1011	1-208-863-81	s RES, CHIP 100 (1005)
R1012	1-208-863-81	s RES, CHIP 100 (1005)
R1013	1-208-863-81	s RES, CHIP 100 (1005)
R1015	1-220-870-81	s RES, CHIP 10 (1005)
R1016	1-208-863-81	s RES, CHIP 100 (1005)
R1017	1-208-863-81	s RES, CHIP 100 (1005)
R1018	1-208-863-81	s RES, CHIP 100 (1005)
R1019	1-208-863-81	s RES, CHIP 100 (1005)
R1022	1-208-863-81	s RES, CHIP 100 (1005)
R1024	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1026	1-208-935-81	s RES, CHIP 100K (1005)
R1029	1-220-870-81	s RES, CHIP 10 (1005)
R1100	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1101	1-208-863-81	s RES, CHIP 100 (1005)
R1102	1-208-863-81	s RES, CHIP 100 (1005)
R1103	1-208-943-81	s RES, CHIP 220K (1005)
R1104	1-220-870-81	s RES, CHIP 10 (1005)
R1105	1-208-863-81	s RES, CHIP 100 (1005)
R1106	1-208-863-81	s RES, CHIP 100 (1005)
R1107	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1108	1-208-935-81	s RES, CHIP 100K (1005)
R1109	1-208-863-81	s RES, CHIP 100 (1005)
R1110	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1111	1-208-911-81	s RES, CHIP 10K (1005)
R1112	1-208-911-81	s RES, CHIP 10K (1005)
R1113	1-208-903-81	s RES, CHIP 4.7K (1005)
R1114	1-208-903-81	s RES, CHIP 4.7K (1005)
R1115	1-208-875-81	s RES, CHIP 330 (1005)
R1116	1-208-903-81	s RES, CHIP 4.7K (1005)
R1118	1-208-903-81	s RES, CHIP 4.7K (1005)
R1119	1-208-903-81	s RES, CHIP 4.7K (1005)
R1120	1-208-863-81	s RES, CHIP 100 (1005)
R1121	1-208-863-81	s RES, CHIP 100 (1005)
R1122	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1123	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1124	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1125	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1126	1-208-860-81	s RES, CHIP 75 (1005)
R1127	1-208-943-81	s RES, CHIP 220K (1005)
R1128	1-208-855-81	s RES, CHIP 47 (1005)
R1129	1-220-870-81	s RES, CHIP 10 (1005)
R1130	1-208-860-81	s RES, CHIP 75 (1005)
R1133	1-220-882-81	s RES, CHIP 33 (1005)
R1134	1-208-887-81	s RES, CHIP 1.0K (1005)
R1135	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1137	1-208-863-81	s RES, CHIP 100 (1005)
R1138	1-208-943-81	s RES, CHIP 220K (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R1139	1-208-943-81	s RES, CHIP 220K (1005)
R1140	1-208-943-81	s RES, CHIP 220K (1005)
R1141	1-208-943-81	s RES, CHIP 220K (1005)
R1146	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1147	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1148	1-208-911-81	s RES, CHIP 10K (1005)
R1149	1-208-915-81	s RES, CHIP 15K (1005)
R1150	1-208-887-81	s RES, CHIP 1.0K (1005)
R1151	1-220-878-81	s RES, CHIP 22 (1005)
R1155	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1156	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1166	1-220-882-81	s RES, CHIP 33 (1005)
R1167	1-220-882-81	s RES, CHIP 33 (1005)
R1172	1-208-856-81	s RES, CHIP 51 (1005)
R1173	1-208-856-81	s RES, CHIP 51 (1005)
R1174	1-208-856-81	s RES, CHIP 51 (1005)
R1175	1-208-856-81	s RES, CHIP 51 (1005)
R1178	1-220-878-81	s RES, CHIP 22 (1005)
R1179	1-208-883-81	s RES, CHIP 680 (1005)
R1180	1-220-878-81	s RES, CHIP 22 (1005)
R1181	1-208-883-81	s RES, CHIP 680 (1005)
R1182	1-208-860-81	s RES, CHIP 75 (1005)
R1183	1-208-860-81	s RES, CHIP 75 (1005)
R1184	1-208-860-81	s RES, CHIP 75 (1005)
R1185	1-208-860-81	s RES, CHIP 75 (1005)
R1186	1-208-867-81	s RES, CHIP 150 (1005)
R1187	1-208-867-81	s RES, CHIP 150 (1005)
R1192	1-208-911-81	s RES, CHIP 10K (1005)
R1193	1-208-911-81	s RES, CHIP 10K (1005)
R1194	1-220-882-81	s RES, CHIP 33 (1005)
R1198	1-208-856-81	s RES, CHIP 51 (1005)
R1200	1-208-856-81	s RES, CHIP 51 (1005)
R1203	1-220-878-81	s RES, CHIP 22 (1005)
R1204	1-208-883-81	s RES, CHIP 680 (1005)
R1205	1-208-860-81	s RES, CHIP 75 (1005)
R1206	1-208-860-81	s RES, CHIP 75 (1005)
R1207	1-208-867-81	s RES, CHIP 150 (1005)
R1210	1-208-911-81	s RES, CHIP 10K (1005)
R1213	1-208-959-81	s RES, CHIP 1M (1005)
R1214	1-208-959-81	s RES, CHIP 1M (1005)
R1215	1-208-915-81	s RES, CHIP 15K (1005)
R1216	1-208-887-81	s RES, CHIP 1.0K (1005)
R1217	1-208-935-81	s RES, CHIP 100K (1005)
R1218	1-208-943-81	s RES, CHIP 220K (1005)
R1219	1-208-935-81	s RES, CHIP 100K (1005)
R1220	1-208-927-81	s RES, CHIP 47K (1005)
R1221	1-208-935-81	s RES, CHIP 100K (1005)
R1222	1-208-927-81	s RES, CHIP 47K (1005)
R1223	1-220-878-81	s RES, CHIP 22 (1005)
R1224	1-220-878-81	s RES, CHIP 22 (1005)
R1231	1-208-860-81	s RES, CHIP 75 (1005)
R1232	1-208-943-81	s RES, CHIP 220K (1005)
R1233	1-208-943-81	s RES, CHIP 220K (1005)
R1234	1-208-943-81	s RES, CHIP 220K (1005)
R1235	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1300	1-208-959-81	s RES, CHIP 1M (1005)
R1301	1-208-959-81	s RES, CHIP 1M (1005)
R1302	1-208-959-81	s RES, CHIP 1M (1005)
R1303	1-208-959-81	s RES, CHIP 1M (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R1304	1-208-915-81 s	RES, CHIP 15K (1005)
R1305	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1306	1-208-915-81 s	RES, CHIP 15K (1005)
R1307	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1308	1-208-935-81 s	RES, CHIP 100K (1005)
R1309	1-208-943-81 s	RES, CHIP 220K (1005)
R1310	1-208-935-81 s	RES, CHIP 100K (1005)
R1311	1-208-935-81 s	RES, CHIP 100K (1005)
R1312	1-208-943-81 s	RES, CHIP 220K (1005)
R1313	1-208-935-81 s	RES, CHIP 100K (1005)
R1314	1-208-935-81 s	RES, CHIP 100K (1005)
R1315	1-208-935-81 s	RES, CHIP 100K (1005)
R1316	1-208-935-81 s	RES, CHIP 100K (1005)
R1317	1-208-935-81 s	RES, CHIP 100K (1005)
R1318	1-208-911-81 s	RES, CHIP 10K (1005)
R1319	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1320	1-208-935-81 s	RES, CHIP 100K (1005)
R1321	1-208-959-81 s	RES, CHIP 1M (1005)
R1322	1-208-959-81 s	RES, CHIP 1M (1005)
R1323	1-208-915-81 s	RES, CHIP 15K (1005)
R1324	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1325	1-208-959-81 s	RES, CHIP 1M (1005)
R1326	1-208-959-81 s	RES, CHIP 1M (1005)
R1327	1-208-915-81 s	RES, CHIP 15K (1005)
R1328	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1329	1-208-935-81 s	RES, CHIP 100K (1005)
R1330	1-208-943-81 s	RES, CHIP 220K (1005)
R1331	1-208-935-81 s	RES, CHIP 100K (1005)
R1332	1-208-935-81 s	RES, CHIP 100K (1005)
R1333	1-208-943-81 s	RES, CHIP 220K (1005)
R1334	1-208-935-81 s	RES, CHIP 100K (1005)
R1335	1-208-935-81 s	RES, CHIP 100K (1005)
R1336	1-208-935-81 s	RES, CHIP 100K (1005)
R1337	1-208-935-81 s	RES, CHIP 100K (1005)
R1338	1-208-935-81 s	RES, CHIP 100K (1005)
R1339	1-208-935-81 s	RES, CHIP 100K (1005)
R1340	1-208-935-81 s	RES, CHIP 100K (1005)
R1341	1-208-919-81 s	RES, CHIP 22K (1005)
R1342	1-208-855-81 s	RES, CHIP 47 (1005)
R1343	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1345	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1346	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1347	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1348	1-208-863-81 s	RES, CHIP 100 (1005)
R1349	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1350	1-208-959-81 s	RES, CHIP 1M (1005)
R1351	1-208-863-81 s	RES, CHIP 100 (1005)
R1352	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1354	1-208-927-81 s	RES, CHIP 47K (1005)
R1355	1-208-915-81 s	RES, CHIP 15K (1005)
R1357	1-208-959-81 s	RES, CHIP 1M (1005)
R1358	1-208-959-81 s	RES, CHIP 1M (1005)
R1359	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1360	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1361	1-208-935-81 s	RES, CHIP 100K (1005)
R1362	1-208-935-81 s	RES, CHIP 100K (1005)
R1363	1-208-911-81 s	RES, CHIP 10K (1005)
R1364	1-208-911-81 s	RES, CHIP 10K (1005)
R1365	1-208-943-81 s	RES, CHIP 220K (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R1366	1-208-927-81 s	RES, CHIP 47K (1005)
R1367	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1368	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1369	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1371	1-208-935-81 s	RES, CHIP 100K (1005)
R1372	1-208-863-81 s	RES, CHIP 100 (1005)
R1373	1-220-870-81 s	RES, CHIP 10 (1005)
R1374	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1375	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1376	1-208-863-81 s	RES, CHIP 100 (1005)
R1377	1-208-863-81 s	RES, CHIP 100 (1005)
R1378	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1379	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1380	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1381	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1382	1-208-911-81 s	RES, CHIP 10K (1005)
R1383	1-208-911-81 s	RES, CHIP 10K (1005)
R1384	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1385	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1386	1-208-863-81 s	RES, CHIP 100 (1005)
R1387	1-208-863-81 s	RES, CHIP 100 (1005)
R1388	1-208-863-81 s	RES, CHIP 100 (1005)
R1389	1-208-863-81 s	RES, CHIP 100 (1005)
R1391	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1392	1-208-959-81 s	RES, CHIP 1M (1005)
R1393	1-208-943-81 s	RES, CHIP 220K (1005)
R1395	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1396	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1397	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1398	1-208-927-81 s	RES, CHIP 47K (1005)
R1399	1-208-927-81 s	RES, CHIP 47K (1005)
R1401	1-208-863-81 s	RES, CHIP 100 (1005)
R1402	1-208-927-81 s	RES, CHIP 47K (1005)
R1403	1-208-863-81 s	RES, CHIP 100 (1005)
R1404	1-208-863-81 s	RES, CHIP 100 (1005)
R1406	1-208-863-81 s	RES, CHIP 100 (1005)
R1501	1-208-863-81 s	RES, CHIP 100 (1005)
R1502	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1503	1-208-863-81 s	RES, CHIP 100 (1005)
R1504	1-208-863-81 s	RES, CHIP 100 (1005)
R1505	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1506	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1507	1-208-863-81 s	RES, CHIP 100 (1005)
R1508	1-208-923-81 s	RES, CHIP 33K (1005)
R1509	1-208-879-81 s	RES, CHIP 470 (1005)
R1510	1-208-867-81 s	RES, CHIP 150 (1005)
R1511	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1512	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1513	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1514	1-208-879-81 s	RES, CHIP 470 (1005)
R1515	1-208-875-81 s	RES, CHIP 330 (1005)
R1516	1-208-863-81 s	RES, CHIP 100 (1005)
R1517	1-208-883-81 s	RES, CHIP 680 (1005)
R1518	1-208-911-81 s	RES, CHIP 10K (1005)
R1519	1-208-873-81 s	RES, CHIP 270 (1005)
R1521	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1522	1-208-907-81 s	RES, CHIP 6.8K (1005)
R1523	1-208-879-81 s	RES, CHIP 470 (1005)
R1524	1-220-878-81 s	RES, CHIP 22 (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R1525	1-208-863-81	s RES, CHIP 100 (1005)
R1526	1-208-863-81	s RES, CHIP 100 (1005)
R1527	1-208-863-81	s RES, CHIP 100 (1005)
R1528	1-208-863-81	s RES, CHIP 100 (1005)
R1529	1-208-903-81	s RES, CHIP 4.7K (1005)
R1530	1-208-935-81	s RES, CHIP 100K (1005)
R1531	1-220-878-81	s RES, CHIP 22 (1005)
R1532	1-220-870-81	s RES, CHIP 10 (1005)
R1533	1-220-878-81	s RES, CHIP 22 (1005)
R1535	1-208-871-81	s RES, CHIP 220 (1005)
R1536	1-208-863-81	s RES, CHIP 100 (1005)
R1539	1-220-878-81	s RES, CHIP 22 (1005)
R1540	1-220-878-81	s RES, CHIP 22 (1005)
R1541	1-208-887-81	s RES, CHIP 1.0K (1005)
R1542	1-208-955-81	s RES, CHIP 680K (1005)
R1543	1-208-891-81	s RES, CHIP 1.5K (1005)
R1544	1-208-855-81	s RES, CHIP 47 (1005)
R1545	1-208-903-81	s RES, CHIP 4.7K (1005)
R1546	1-208-903-81	s RES, CHIP 4.7K (1005)
R1547	1-208-887-81	s RES, CHIP 1.0K (1005)
R1548	1-208-891-81	s RES, CHIP 1.5K (1005)
R1551	1-208-903-81	s RES, CHIP 4.7K (1005)
R1554	1-208-875-81	s RES, CHIP 330 (1005)
R1555	1-208-873-81	s RES, CHIP 270 (1005)
R1556	1-208-855-81	s RES, CHIP 47 (1005)
R1557	1-208-887-81	s RES, CHIP 1.0K (1005)
R1558	1-220-882-81	s RES, CHIP 33 (1005)
R1559	1-208-903-81	s RES, CHIP 4.7K (1005)
R1562	1-208-863-81	s RES, CHIP 100 (1005)
R1563	1-208-887-81	s RES, CHIP 1.0K (1005)
R1564	1-208-887-81	s RES, CHIP 1.0K (1005)
R1565	1-220-878-81	s RES, CHIP 22 (1005)
R1566	1-208-903-81	s RES, CHIP 4.7K (1005)
R1567	1-208-863-81	s RES, CHIP 100 (1005)
R1568	1-208-863-81	s RES, CHIP 100 (1005)
R1569	1-208-863-81	s RES, CHIP 100 (1005)
R1570	1-208-863-81	s RES, CHIP 100 (1005)
R1571	1-220-878-81	s RES, CHIP 22 (1005)
R1572	1-208-887-81	s RES, CHIP 1.0K (1005)
R1573	1-208-891-81	s RES, CHIP 1.5K (1005)
R1574	1-208-903-81	s RES, CHIP 4.7K (1005)
R1575	1-208-903-81	s RES, CHIP 4.7K (1005)
R1576	1-208-887-81	s RES, CHIP 1.0K (1005)
R1577	1-208-891-81	s RES, CHIP 1.5K (1005)
R1578	1-208-863-81	s RES, CHIP 100 (1005)
R1579	1-208-863-81	s RES, CHIP 100 (1005)
R1580	1-208-860-81	s RES, CHIP 75 (1005)
R1581	1-208-923-81	s RES, CHIP 33K (1005)
R1582	1-208-860-81	s RES, CHIP 75 (1005)
R1583	1-208-959-81	s RES, CHIP 1M (1005)
R1584	1-208-887-81	s RES, CHIP 1.0K (1005)
R1585	1-208-899-81	s RES, CHIP 3.3K (1005)
R1586	1-208-919-81	s RES, CHIP 22K (1005)
R1587	1-208-923-81	s RES, CHIP 33K (1005)
R1588	1-208-923-81	s RES, CHIP 33K (1005)
R1589	1-208-895-81	s RES, CHIP 2.2K (1005)
R1590	1-208-959-81	s RES, CHIP 1M (1005)
R1591	1-208-911-81	s RES, CHIP 10K (1005)
R1592	1-208-927-81	s RES, CHIP 47K (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R1593	1-208-855-81	s RES, CHIP 47 (1005)
R1594	1-208-935-81	s RES, CHIP 100K (1005)
R1595	1-208-895-81	s RES, CHIP 2.2K (1005)
R1596	1-208-855-81	s RES, CHIP 47 (1005)
R1597	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1598	1-208-935-81	s RES, CHIP 100K (1005)
R1599	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1600	1-208-887-81	s RES, CHIP 1.0K (1005)
R1601	1-208-903-81	s RES, CHIP 4.7K (1005)
R1602	1-208-895-81	s RES, CHIP 2.2K (1005)
R1603	1-208-883-81	s RES, CHIP 680 (1005)
R1604	1-208-887-81	s RES, CHIP 1.0K (1005)
R1605	1-208-903-81	s RES, CHIP 4.7K (1005)
R1606	1-208-899-81	s RES, CHIP 3.3K (1005)
R1607	1-208-899-81	s RES, CHIP 3.3K (1005)
R1608	1-208-899-81	s RES, CHIP 3.3K (1005)
R1609	1-208-875-81	s RES, CHIP 330 (1005)
R1610	1-208-895-81	s RES, CHIP 2.2K (1005)
R1611	1-208-895-81	s RES, CHIP 2.2K (1005)
R1612	1-208-875-81	s RES, CHIP 330 (1005)
R1613	1-208-887-81	s RES, CHIP 1.0K (1005)
R1614	1-208-903-81	s RES, CHIP 4.7K (1005)
R1615	1-208-887-81	s RES, CHIP 1.0K (1005)
R1616	1-208-903-81	s RES, CHIP 4.7K (1005)
R1617	1-208-883-81	s RES, CHIP 680 (1005)
R1618	1-208-875-81	s RES, CHIP 330 (1005)
R1619	1-208-887-81	s RES, CHIP 1.0K (1005)
R1620	1-208-871-81	s RES, CHIP 220 (1005)
R1621	1-208-871-81	s RES, CHIP 220 (1005)
R1622	1-208-871-81	s RES, CHIP 220 (1005)
R1623	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1624	1-220-878-81	s RES, CHIP 22 (1005)
R1626	1-208-863-81	s RES, CHIP 100 (1005)
R1627	1-208-860-81	s RES, CHIP 75 (1005)
R1628	1-208-903-81	s RES, CHIP 4.7K (1005)
R1629	1-220-878-81	s RES, CHIP 22 (1005)
R1630	1-220-878-81	s RES, CHIP 22 (1005)
R1631	1-208-887-81	s RES, CHIP 1.0K (1005)
R1632	1-208-891-81	s RES, CHIP 1.5K (1005)
R1633	1-208-903-81	s RES, CHIP 4.7K (1005)
R1634	1-208-887-81	s RES, CHIP 1.0K (1005)
R1635	1-208-903-81	s RES, CHIP 4.7K (1005)
R1636	1-208-891-81	s RES, CHIP 1.5K (1005)
R1637	1-208-903-81	s RES, CHIP 4.7K (1005)
R1638	1-208-903-81	s RES, CHIP 4.7K (1005)
R1639	1-208-887-81	s RES, CHIP 1.0K (1005)
R1640	1-208-891-81	s RES, CHIP 1.5K (1005)
R1642	1-208-879-81	s RES, CHIP 470 (1005)
R1643	1-208-887-81	s RES, CHIP 1.0K (1005)
R1644	1-208-891-81	s RES, CHIP 1.5K (1005)
R1645	1-220-878-81	s RES, CHIP 22 (1005)
R1646	1-208-903-81	s RES, CHIP 4.7K (1005)
R1647	1-220-878-81	s RES, CHIP 22 (1005)
R1648	1-208-887-81	s RES, CHIP 1.0K (1005)
R1649	1-208-891-81	s RES, CHIP 1.5K (1005)
R1650	1-208-903-81	s RES, CHIP 4.7K (1005)
R1651	1-208-903-81	s RES, CHIP 4.7K (1005)
R1652	1-208-887-81	s RES, CHIP 1.0K (1005)
R1653	1-208-891-81	s RES, CHIP 1.5K (1005)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
R1654	1-208-860-81	s RES, CHIP 75 (1005)
R1655	1-208-855-81	s RES, CHIP 47 (1005)
R1656	1-208-935-81	s RES, CHIP 100K (1005)
R1657	1-208-895-81	s RES, CHIP 2.2K (1005)
R1658	1-208-895-81	s RES, CHIP 2.2K (1005)
R1659	1-208-887-81	s RES, CHIP 1.0K (1005)
R1660	1-208-903-81	s RES, CHIP 4.7K (1005)
R1661	1-208-887-81	s RES, CHIP 1.0K (1005)
R1662	1-208-903-81	s RES, CHIP 4.7K (1005)
R1663	1-208-883-81	s RES, CHIP 680 (1005)
R1664	1-208-899-81	s RES, CHIP 3.3K (1005)
R1665	1-208-875-81	s RES, CHIP 330 (1005)
R1666	1-208-903-81	s RES, CHIP 4.7K (1005)
R1667	1-208-863-81	s RES, CHIP 100 (1005)
R1668	1-208-903-81	s RES, CHIP 4.7K (1005)
R1670	1-208-860-81	s RES, CHIP 75 (1005)
R1671	1-208-860-81	s RES, CHIP 75 (1005)
R1673	1-208-863-81	s RES, CHIP 100 (1005)
R1675	1-208-927-81	s RES, CHIP 47K (1005)
R1676	1-208-863-81	s RES, CHIP 100 (1005)
R1677	1-208-903-81	s RES, CHIP 4.7K (1005)
R1678	1-208-887-81	s RES, CHIP 1.0K (1005)
R1679	1-208-899-81	s RES, CHIP 3.3K (1005)
R1681	1-208-903-81	s RES, CHIP 4.7K (1005)
R1682	1-208-903-81	s RES, CHIP 4.7K (1005)
R1683	1-208-863-81	s RES, CHIP 100 (1005)
R1684	1-208-863-81	s RES, CHIP 100 (1005)
R1685	1-208-863-81	s RES, CHIP 100 (1005)
R1686	1-208-887-81	s RES, CHIP 1.0K (1005)
R1688	1-208-895-81	s RES, CHIP 2.2K (1005)
R1689	1-208-911-81	s RES, CHIP 10K (1005)
R1690	1-208-911-81	s RES, CHIP 10K (1005)
R1691	1-208-911-81	s RES, CHIP 10K (1005)
R1692	1-208-915-81	s RES, CHIP 15K (1005)
R1693	1-220-878-81	s RES, CHIP 22 (1005)
R1694	1-208-887-81	s RES, CHIP 1.0K (1005)
R1695	1-208-887-81	s RES, CHIP 1.0K (1005)
R1697	1-218-990-81	s CONDUCTOR, CHIP (1005)
RB300	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB301	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB302	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB303	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB304	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB305	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB306	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB307	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB308	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB309	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB310	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB311	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB312	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB313	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB314	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB315	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB316	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB317	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB318	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB319	1-234-382-21	s RES, NETWORK 220K (1005X4)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP Description
RB320	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB321	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB322	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB323	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB400	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB500	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB501	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB503	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB504	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB505	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB506	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB507	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB508	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB600	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB601	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB602	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB603	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB604	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB605	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB606	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB607	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB608	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB609	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB610	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB611	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB612	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB613	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB614	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB615	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB616	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB617	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB618	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB619	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB800	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB801	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB802	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB803	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB804	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB805	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB806	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB807	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB808	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB809	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB810	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB811	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB812	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB813	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB814	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB815	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB816	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB817	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB818	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB819	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB820	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB821	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB822	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB823	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB824	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB825	1-234-371-21	s RES, NETWORK 47 (1005X4)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description		
RB1004	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1005	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1006	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1007	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1008	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1009	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1010	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1011	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1012	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1013	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1014	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1015	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1016	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1018	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1019	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1020	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1021	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1022	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1023	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1024	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1025	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1026	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1027	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1028	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1029	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1030	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1031	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1032	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1033	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1034	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1035	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1036	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1037	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1038	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1039	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1045	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1046	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1047	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1048	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1100	1-234-375-21	s	RES, NETWORK	1K	(1005X4)
RB1101	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1104	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1105	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1106	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1107	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1108	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1109	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1110	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1111	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1112	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1113	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1115	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1116	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1117	1-234-378-21	s	RES, NETWORK	10K	(1005X4)
RB1118	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1119	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1120	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1300	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1301	1-234-372-21	s	RES, NETWORK	100	(1005X4)

(DCP-44 BOARD (suffix 13))

Ref. No. or Q'ty	Part No.	SP	Description
RB1302	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1309	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1313	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB1328	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1329	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1330	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1331	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1332	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1333	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1334	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1335	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB1336	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1337	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1338	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1339	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1340	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB1341	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1500	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1501	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1503	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1504	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1505	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1506	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1507	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1508	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1509	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1510	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1512	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1513	1-234-372-21	s	RES, NETWORK 100 (1005X4)
RB1514	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1515	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB1516	1-234-371-21	s	RES, NETWORK 47 (1005X4)
TP400	1-535-877-22	s	CHIP, CHECKER
TP401	1-535-877-22	s	CHIP, CHECKER
TP1000	1-535-877-22	s	CHIP, CHECKER
TP1001	1-535-877-22	s	CHIP, CHECKER
TP1300	1-535-877-22	s	CHIP, CHECKER
TP1500	1-535-877-22	s	CHIP, CHECKER
TP1501	1-535-877-22	s	CHIP, CHECKER
VDR1	1-802-245-11	s	ESD SUPPRESSOR
VDR2	1-802-245-11	s	ESD SUPPRESSOR
VDR3	1-802-245-11	s	ESD SUPPRESSOR
VDR4	1-802-245-11	s	ESD SUPPRESSOR
X400	1-795-831-12	s	OSCILLATOR, CRYSTAL (VCXO) 3.3V

DCP-49 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1727-966-A	s	MOUNTED CIRCUIT BOARD, DCP-49
4pcs	3-854-997-01	s	SUPPORT (M2X7)
4pcs	3-855-938-01	s	SCREW
3pcs	3-855-938-01	s	SCREW
3pcs	3-875-192-01	s	SUPPORT HEATSINK
C1	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C201	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C202	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C216	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C220	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C221	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C222	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C223	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C225	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C226	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C232	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C235	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C237	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C240	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C255	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C256	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C269	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C270	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C271	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C272	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C273	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C274	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C275	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C276	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C277	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C278	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C279	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C280	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C281	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C282	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C302	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C304	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C305	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C306	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C307	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C313	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C323	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C324	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C325	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C326	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C327	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C328	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C338	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C339	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C340	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C341	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C342	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C343	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C345	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C346	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C347	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C348	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C349	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C350	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C351	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C352	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C353	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C354	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C355	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C356	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C357	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C358	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C359	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C360	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C361	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C362	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C363	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C364	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C365	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C366	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C367	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C368	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C369	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C370	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C371	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C372	1-165-989-91	s CAP, CERAMIC 10MF (2012)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C373	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C374	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C375	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C376	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C377	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C378	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C379	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C380	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C381	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C382	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C383	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C384	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C385	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C386	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C387	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C388	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C389	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C400	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C401	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C402	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C403	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C404	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C405	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C406	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C407	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C408	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C411	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C412	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C413	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C414	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C416	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C417	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C418	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C419	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C420	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C421	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C422	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C423	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C424	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C425	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C426	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C427	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C428	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C429	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C430	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C431	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C432	1-112-015-91	s CAP, CHIP CERAMIC 47MF B 3225
C433	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C434	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C435	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C436	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C437	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C438	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C439	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C440	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C441	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C442	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C443	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C444	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C619	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C620	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C623	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C624	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C625	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C626	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C627	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C628	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C629	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C630	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C631	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C632	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C633	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C634	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C635	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C636	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C637	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C638	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C639	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C640	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C641	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C642	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C643	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C644	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C645	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C646	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C647	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C648	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C649	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C650	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C651	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C652	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C653	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C654	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C655	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C656	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C657	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C658	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C659	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C660	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C661	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C662	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C663	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C664	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C665	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C725	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C726	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C727	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C728	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C729	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C730	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C731	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C732	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C733	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C734	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C735	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C736	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C737	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C738	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C739	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C740	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C741	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C742	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C743	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C744	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C745	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C746	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C747	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C748	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C749	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C750	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C751	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C752	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C753	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C754	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C755	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C756	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C757	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C758	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C759	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C760	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C761	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C762	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C763	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C765	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C766	1-100-421-21	s	CAP, ELECT 220MF (6.3X5.9)
C800	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C801	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C802	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C803	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C804	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C805	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C806	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C810	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C815	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C816	1-112-746-11	s	CAP, CERAMIC 4.7MF B (1608)
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description					
C877	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C878	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C879	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C880	1-100-159-91	s	CAP, CERAMIC	22MF	B (SMD)		3216	
C881	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C882	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C883	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C884	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C885	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C886	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C887	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C888	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C889	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C890	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C891	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C892	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C893	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C894	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C895	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C896	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C897	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C898	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C899	1-100-159-91	s	CAP, CERAMIC	22MF	B (SMD)		3216	
C903	1-100-159-91	s	CAP, CERAMIC	22MF	B (SMD)		3216	
C904	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C905	1-165-989-91	s	CAP, CERAMIC	10MF	(2012)			
C906	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C907	1-100-159-91	s	CAP, CERAMIC	22MF	B (SMD)		3216	
C908	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C912	1-165-989-91	s	CAP, CERAMIC	10MF	(2012)			
C913	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C915	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C916	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C917	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C918	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C919	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C920	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C921	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C922	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C923	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C924	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C925	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C926	1-100-159-91	s	CAP, CERAMIC	22MF	B (SMD)		3216	
C927	1-165-989-91	s	CAP, CERAMIC	10MF	(2012)			
C928	1-165-989-91	s	CAP, CERAMIC	10MF	(2012)			
C929	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C930	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C931	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C932	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C933	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C934	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C935	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C936	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C1001	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C1002	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C1003	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C1102	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C1103	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	
C1104	1-125-777-81	s	CAP, CHIP	CERAMIC	0.1MF	B	1005	

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1187	1-164-874-81	s	CAP, CHIP CERAMIC 100PF CH 1005
C1188	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1189	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1190	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1191	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1192	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1300	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1302	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1303	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1304	1-112-692-81	s	CAP, CHIP CERAMIC 1000PF CH 1005
C1305	1-112-692-81	s	CAP, CHIP CERAMIC 1000PF CH 1005
C1306	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1307	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1308	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1309	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1310	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1311	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1313	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1314	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1315	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1316	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1317	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1319	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1320	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1321	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1322	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1323	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1324	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1325	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1326	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1327	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1328	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1329	1-112-692-81	s	CAP, CHIP CERAMIC 1000PF CH 1005
C1330	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1331	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1332	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1333	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1334	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1335	1-112-692-81	s	CAP, CHIP CERAMIC 1000PF CH 1005
C1336	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1337	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1338	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1339	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C1340	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1341	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1342	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1343	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1344	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1345	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1346	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1347	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1348	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1349	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1350	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1351	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1352	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C1353	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1508	1-164-860-81	s	CAP, CHIP CERAMIC 27PF CH 1005
C1509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-164-862-81	s	CAP, CHIP CERAMIC 33PF CH 1005
C1512	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1518	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1522	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1523	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1524	1-164-845-81	s	CAP, CHIP CERAMIC 5PF CH 1005
C1525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1526	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1528	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1529	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1533	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C1534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1539	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1540	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1543	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1545	1-164-860-81	s	CAP, CHIP CERAMIC 27PF CH 1005
C1546	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1549	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1551	1-100-159-91	s	CAP, CERAMIC 22MF B (SMD) 3216
C1552	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1553	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1554	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1555	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1556	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1561	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1562	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C1563	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1567	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1570	1-165-989-91	s	CAP, CERAMIC 10MF (2012)
C1571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1572	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1573	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1574	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1576	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1577	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1578	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1579	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1580	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C1581	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1582	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1583	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1584	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1585	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1586	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1587	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1588	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1589	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1590	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C1591	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1592	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1593	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1594	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1595	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1596	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1597	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1599	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1605	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1606	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1608	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1612	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1617	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1618	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1619	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1620	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1622	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1623	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1624	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1625	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C1626	1-100-581-81 s	CAP,CHIP CERAMIC0.0047MF B1005
C1627	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1628	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C1629	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1630	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1631	1-164-845-81 s	CAP, CHIP CERAMIC 5PF CH 1005
C1632	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C1633	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1634	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1635	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1636	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1637	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1638	1-164-862-81 s	CAP, CHIP CERAMIC 33PF CH 1005
C1639	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1640	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1641	1-164-866-81 s	CAP, CHIP CERAMIC 47PF CH 1005
C1642	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1643	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1644	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
CN2	1-818-579-91 s	CONNECTOR, BOARD TO BOARD(60P)
CN3	1-691-591-21 o	PIN, CONNECTOR (1.5MM) (SMD)8P
CN10	1-764-243-31 o	CONNECTOR (COAXIAL)
CN11	1-764-243-31 o	CONNECTOR (COAXIAL)
CN12	1-764-243-31 o	CONNECTOR (COAXIAL)
CN13	1-764-243-31 o	CONNECTOR (COAXIAL)
CN14	1-764-243-31 o	CONNECTOR (COAXIAL)
CN15	1-764-243-31 o	CONNECTOR (COAXIAL)
CN100	1-784-254-21 s	CONNECTOR 10P
D1	8-719-069-28 s	DI 1SS400FJTE61
D200	8-719-989-04 s	DIODE DAN222-TL
D400	8-719-083-60 s	DI UDZSUSTE-174.7B
D401	8-719-083-60 s	DI UDZSUSTE-174.7B
D402	8-719-083-60 s	DI UDZSUSTE-174.7B
D403	8-719-083-60 s	DI UDZSUSTE-174.7B
D404	8-719-989-01 s	DIODE DA221-TL
D405	8-719-989-01 s	DIODE DA221-TL
D500	8-719-991-01 s	DIODE DAP222-TL
D501	8-719-991-01 s	DIODE DAP222-TL
D701	8-719-082-45 s	DIODE RB715W-TL
D702	8-719-082-45 s	DIODE RB715W-TL
D703	8-719-082-45 s	DIODE RB715W-TL
D704	8-719-082-45 s	DIODE RB715W-TL
D1300	8-719-991-01 s	DIODE DAP222-TL
D1301	8-719-991-01 s	DIODE DAP222-TL
D1500	8-719-989-04 s	DIODE DAN222-TL
E201	1-535-877-22 s	CHIP, CHECKER
E400	1-535-877-22 s	CHIP, CHECKER
E1000	1-535-877-22 s	CHIP, CHECKER
E1001	1-535-877-22 s	CHIP, CHECKER
E1002	1-535-877-22 s	CHIP, CHECKER
E1003	1-535-877-22 s	CHIP, CHECKER
FB202	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB300	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB301	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB302	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB303	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB304	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB305	1-469-100-21 s	FERRITE, EMI (SMD) (1608)
FB800	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB803	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB804	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB805	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB806	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB807	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB808	1-414-864-21 s	FERRITE, EMI (SMD) (1608)
FB809	1-414-864-21 s	FERRITE, EMI (SMD) (1608)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
FB810	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB811	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB812	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB813	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB814	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1300	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1301	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1302	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1303	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1304	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1305	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1306	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1307	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1308	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1309	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1310	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1311	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1312	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1313	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1314	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1315	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1316	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1317	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1318	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1319	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1320	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1321	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB1322	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FL300	1-813-541-11	s	FILTER, LOW PASS
FL301	1-813-541-11	s	FILTER, LOW PASS
FL302	1-813-541-11	s	FILTER, LOW PASS
FL1500	1-233-742-21	s	FILTER, LOW PASS
IC1	6-706-476-01	s	IC TC7SET04FU
IC2	6-706-484-01	s	IC TC7SH04FU
IC4	8-759-346-27	s	IC LM45BIM3X
IC6	8-759-327-01	s	IC NJM062V (TE2)
IC8	6-712-526-01	s	IC CAT24C32WI-GT3 (E)
IC9	6-706-487-01	s	IC TC7SH08FU
IC10	6-706-487-01	s	IC TC7SH08FU
IC14	6-704-350-01	s	IC SN74LVC1G66DCKR
IC16	6-704-350-01	s	IC SN74LVC1G66DCKR
IC19	6-706-487-01	s	IC TC7SH08FU
IC200	6-711-696-01	s	IC CY62256VNULL-70ZXCT
IC202	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC203	8-759-672-76	s	IC AK9813BF-E2
IC210	6-700-225-01	s	IC TC74VCX157FT (EL)
IC220	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC222	8-759-669-67	s	IC TL074CPWR-12
IC223	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC224	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC225	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC226	6-707-414-01	s	IC DS90LV011ATMF
IC227	6-707-414-01	s	IC DS90LV011ATMF
IC228	6-711-852-01	s	IC LTC1844ES5-BYP
IC229	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC230	6-711-852-01	s	IC LTC1844ES5-BYP
IC301	6-707-884-01	s	IC TC74VHCT04AFT (EKJ)
IC303	8-759-561-46	s	IC AD8014ARTZ-REEL7

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC304	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC305	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC306	8-759-675-54	s	IC TC7W53FK (TE85R)
IC307	8-759-675-54	s	IC TC7W53FK (TE85R)
IC308	8-759-675-54	s	IC TC7W53FK (TE85R)
IC312	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC313	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC314	8-759-561-46	s	IC AD8014ARTZ-REEL7
IC318	6-711-361-01	s	IC LTC2249CUH#TR
IC319	6-711-361-01	s	IC LTC2249CUH#TR
IC320	6-711-361-01	s	IC LTC2249CUH#TR
IC322	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC323	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC324	6-704-350-01	s	IC SN74LVC1G66DCKR
IC325	6-704-350-01	s	IC SN74LVC1G66DCKR
IC326	6-704-350-01	s	IC SN74LVC1G66DCKR
IC331	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC332	8-759-592-44	s	IC TC7SZ04FU (TE85R)
IC333	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC336	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC337	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC338	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC400	8-759-327-01	s	IC NJM062V (TE2)
IC401	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC402	8-759-327-01	s	IC NJM062V (TE2)
IC403	8-759-327-01	s	IC NJM062V (TE2)
IC404	8-759-485-24	s	IC MC74HC4046ADTR2
IC406	6-706-478-01	s	IC TC7SET08FU
IC407	6-706-478-01	s	IC TC7SET08FU
IC408	8-759-675-54	s	IC TC7W53FK (TE85R)
IC410	8-759-675-47	s	IC SN74LVC04APWR
IC411	6-701-877-01	s	IC SM8707EV-G-E2
IC412	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC413	6-706-136-01	s	IC LTC3412EFE#TR
IC414	6-706-136-01	s	IC LTC3412EFE#TR
IC415	8-759-675-54	s	IC TC7W53FK (TE85R)
IC416	6-711-852-01	s	IC LTC1844ES5-BYP
IC417	8-759-327-01	s	IC NJM062V (TE2)
IC418	8-759-669-66	s	IC TLC272CPWR-12
IC419	6-706-478-01	s	IC TC7SET08FU
IC501	6-706-088-01	s	IC UPD6467GR-560-E2
IC502	6-706-088-01	s	IC UPD6467GR-560-E2
IC503	6-706-088-01	s	IC UPD6467GR-560-E2
IC504	6-706-088-01	s	IC UPD6467GR-560-E2
IC506	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC507	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC508	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC700	6-710-620-01	s	IC EDD2516AETA-5B-E
IC701	6-710-620-01	s	IC EDD2516AETA-5B-E
IC702	6-710-620-01	s	IC EDD2516AETA-5B-E
IC703	6-710-620-01	s	IC EDD2516AETA-5B-E
IC704	6-710-620-01	s	IC EDD2516AETA-5B-E
IC801	8-759-592-48	s	IC TC7SZ32FU (TE85R)
IC802	6-707-843-01	s	IC TC74LCX125FT (EKJ)
IC803	6-707-843-01	s	IC TC74LCX125FT (EKJ)
IC804	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC1102	8-759-669-43	s	IC SN74LVC157APWR-12
IC1104	6-712-298-11	s	IC GS1524ACTDE3
IC1105	6-705-968-01	s	IC S-89431ACNC-HBV-TFG

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC1109	6-711-946-11	s IC GS1528BCTAE3
IC1112	6-711-946-11	s IC GS1528BCTAE3
IC1113	6-711-946-11	s IC GS1528BCTAE3
IC1116	6-706-220-01	s IC LTC3411EMS#TR
IC1119	6-714-067-01	s IC PCA9555DB-T
IC1120	6-707-891-01	s IC TC74VHCT245AFT(EKJ)
IC1121	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC1300	6-706-220-01	s IC LTC3411EMS#TR
IC1301	6-706-220-01	s IC LTC3411EMS#TR
IC1302	6-706-220-01	s IC LTC3411EMS#TR
IC1303	6-706-220-01	s IC LTC3411EMS#TR
IC1304	8-759-337-40	s IC NJM2904V(TE2)
IC1305	6-708-346-01	s IC DAC7512N
IC1306	6-707-891-01	s IC TC74VHCT245AFT(EKJ)
IC1308	8-759-669-43	s IC SN74LVC157APWR-12
IC1310	6-706-136-01	s IC LTC3412EFE#TR
IC1311	6-703-848-01	s IC SN74CB3T3306DCUR
IC1312	6-703-848-01	s IC SN74CB3T3306DCUR
IC1313	6-706-220-01	s IC LTC3411EMS#TR
IC1314	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC1315	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC1316	8-759-592-47	s IC TC7SZ08FU(TE85R)
IC1500	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1501	8-759-669-66	s IC TLC272CPWR-12
IC1502	8-759-675-54	s IC TC7W53FK(TE85R)
IC1503	8-759-669-66	s IC TLC272CPWR-12
IC1504	8-759-327-14	s IC TL712CPSR
IC1505	8-759-327-14	s IC TL712CPSR
IC1506	6-704-350-01	s IC SN74LVC1G66DCKR
IC1508	6-704-350-01	s IC SN74LVC1G66DCKR
IC1509	6-704-350-01	s IC SN74LVC1G66DCKR
IC1511	6-704-406-01	s IC LM1881MX NOPB
IC1512	6-706-484-01	s IC TC7SH04FU
IC1513	6-706-471-01	s IC THS5661AIPWR
IC1514	6-707-865-01	s IC TC74VHC125FT(EKJ)
IC1515	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1516	8-759-327-01	s IC NJM062V(TE2)
IC1517	6-704-350-01	s IC SN74LVC1G66DCKR
IC1518	6-707-997-01	s IC ADV7320KSTZ
IC1519	6-704-350-01	s IC SN74LVC1G66DCKR
IC1520	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1521	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1522	8-759-672-76	s IC AK9813BF-E2
IC1523	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1524	6-707-997-01	s IC ADV7320KSTZ
IC1525	6-707-997-01	s IC ADV7320KSTZ
IC1526	6-704-350-01	s IC SN74LVC1G66DCKR
IC1527	6-704-350-01	s IC SN74LVC1G66DCKR
IC1528	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1529	8-759-675-54	s IC TC7W53FK(TE85R)
IC1530	8-759-675-54	s IC TC7W53FK(TE85R)
IC1531	6-704-350-01	s IC SN74LVC1G66DCKR
IC1532	6-706-484-01	s IC TC7SH04FU
IC1533	8-759-561-46	s IC AD8014ARTZ-REEL7
IC1534	6-704-350-01	s IC SN74LVC1G66DCKR
L200	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L201	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L202	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L400	1-416-344-21	s COIL, CHOKE 10UH

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L401	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L402	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L403	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L404	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L405	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L406	1-424-723-21	s COIL, CHOKE 1.0UH
L407	1-424-723-21	s COIL, CHOKE 1.0UH
L408	1-416-344-21	s COIL, CHOKE 10UH
L409	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L410	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L411	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L412	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L413	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L414	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L416	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L417	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L600	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L601	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L602	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L603	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L604	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L605	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L800	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L801	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L802	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L803	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L805	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L806	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L807	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L808	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1100	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1103	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1104	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1106	1-414-836-21	s INDUCTOR, CHIP 4.7NH (1005)
L1107	1-419-630-21	s COIL, CHOKE 4.7UH
L1300	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1301	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1302	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1303	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1306	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1307	1-419-630-21	s COIL, CHOKE 4.7UH
L1500	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1501	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1504	1-412-947-21	s INDUCTOR 4.7UH (2520)
L1505	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1506	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1507	1-412-981-41	s INDUCTOR, SMALL TYPE 1.5UH
L1508	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1510	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1511	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1512	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1513	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1514	1-412-979-41	s INDUCTOR, SMALL TYPE 1.0UH
L1515	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1516	1-414-392-41	s INDUCTOR (SMD) 1.0UH
L1517	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L1518	1-412-947-21	s INDUCTOR 4.7UH (2520)
L1519	1-412-979-41	s INDUCTOR, SMALL TYPE 1.0UH
L1520	1-412-979-41	s INDUCTOR, SMALL TYPE 1.0UH

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L1521	1-412-955-21	s	INDUCTOR, SMALL TYPE 22UH 2520
Q300	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q301	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q400	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q401	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q402	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q404	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q405	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q406	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q408	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q409	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q410	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q414	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q501	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q505	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q506	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q1105	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1106	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1107	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1108	6-551-659-01	s	TRANSISTOR SI3443BDV-T1-E3
Q1300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1301	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1500	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1501	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1503	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1504	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1505	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1506	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1507	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1509	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1510	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1511	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1512	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q1513	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1514	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q1515	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
R1	1-208-855-81	s	RES, CHIP 47 (1005)
R2	1-208-855-81	s	RES, CHIP 47 (1005)
R3	1-208-855-81	s	RES, CHIP 47 (1005)
R4	1-208-855-81	s	RES, CHIP 47 (1005)
R5	1-208-855-81	s	RES, CHIP 47 (1005)
R6	1-208-855-81	s	RES, CHIP 47 (1005)
R7	1-208-855-81	s	RES, CHIP 47 (1005)
R8	1-208-855-81	s	RES, CHIP 47 (1005)
R9	1-208-855-81	s	RES, CHIP 47 (1005)
R10	1-208-855-81	s	RES, CHIP 47 (1005)
R11	1-208-855-81	s	RES, CHIP 47 (1005)
R12	1-208-855-81	s	RES, CHIP 47 (1005)
R13	1-208-855-81	s	RES, CHIP 47 (1005)
R14	1-208-855-81	s	RES, CHIP 47 (1005)
R15	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R16	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R17	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R20	1-208-855-81	s	RES, CHIP 47 (1005)
R21	1-208-855-81	s	RES, CHIP 47 (1005)
R22	1-208-855-81	s	RES, CHIP 47 (1005)
R23	1-208-855-81	s	RES, CHIP 47 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R24	1-208-855-81	s	RES, CHIP 47 (1005)
R25	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R26	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R27	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-935-81	s	RES, CHIP 100K (1005)
R29	1-208-863-81	s	RES, CHIP 100 (1005)
R30	1-208-863-81	s	RES, CHIP 100 (1005)
R31	1-208-863-81	s	RES, CHIP 100 (1005)
R33	1-208-887-81	s	RES, CHIP 1.0K (1005)
R34	1-208-911-81	s	RES, CHIP 10K (1005)
R35	1-208-863-81	s	RES, CHIP 100 (1005)
R36	1-208-863-81	s	RES, CHIP 100 (1005)
R37	1-208-911-81	s	RES, CHIP 10K (1005)
R38	1-208-911-81	s	RES, CHIP 10K (1005)
R39	1-208-911-81	s	RES, CHIP 10K (1005)
R40	1-208-863-81	s	RES, CHIP 100 (1005)
R41	1-208-855-81	s	RES, CHIP 47 (1005)
R42	1-208-855-81	s	RES, CHIP 47 (1005)
R51	1-208-855-81	s	RES, CHIP 47 (1005)
R52	1-208-855-81	s	RES, CHIP 47 (1005)
R53	1-208-855-81	s	RES, CHIP 47 (1005)
R54	1-208-943-81	s	RES, CHIP 220K (1005)
R56	1-208-943-81	s	RES, CHIP 220K (1005)
R57	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R204	1-208-715-11	s	RES, CHIP 22K (1005)
R206	1-208-895-81	s	RES, CHIP 2.2K (1005)
R207	1-208-879-81	s	RES, CHIP 470 (1005)
R208	1-208-895-81	s	RES, CHIP 2.2K (1005)
R209	1-208-879-81	s	RES, CHIP 470 (1005)
R210	1-208-895-81	s	RES, CHIP 2.2K (1005)
R211	1-208-879-81	s	RES, CHIP 470 (1005)
R213	1-208-860-81	s	RES, CHIP 75 (1005)
R214	1-208-895-81	s	RES, CHIP 2.2K (1005)
R215	1-208-860-81	s	RES, CHIP 75 (1005)
R216	1-208-860-81	s	RES, CHIP 75 (1005)
R217	1-208-895-81	s	RES, CHIP 2.2K (1005)
R218	1-208-895-81	s	RES, CHIP 2.2K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-923-81	s	RES, CHIP 33K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-208-871-81	s	RES, CHIP 220 (1005)
R228	1-208-671-11	s	RES, CHIP 330 (1005)
R229	1-208-895-81	s	RES, CHIP 2.2K (1005)
R230	1-220-870-81	s	RES, CHIP 10 (1005)
R231	1-208-935-81	s	RES, CHIP 100K (1005)
R232	1-208-879-81	s	RES, CHIP 470 (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-220-878-81	s	RES, CHIP 22 (1005)
R238	1-208-855-81	s	RES, CHIP 47 (1005)
R240	1-208-935-81	s	RES, CHIP 100K (1005)
R242	1-208-887-81	s	RES, CHIP 1.0K (1005)
R243	1-208-935-81	s	RES, CHIP 100K (1005)
R247	1-220-878-81	s	RES, CHIP 22 (1005)
R248	1-208-935-81	s	RES, CHIP 100K (1005)
R252	1-220-878-81	s	RES, CHIP 22 (1005)
R253	1-220-878-81	s	RES, CHIP 22 (1005)
R254	1-220-878-81	s	RES, CHIP 22 (1005)
R255	1-220-878-81	s	RES, CHIP 22 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R259	1-220-878-81	s RES, CHIP 22 (1005)
R260	1-220-878-81	s RES, CHIP 22 (1005)
R261	1-208-855-81	s RES, CHIP 47 (1005)
R262	1-220-878-81	s RES, CHIP 22 (1005)
R264	1-208-855-81	s RES, CHIP 47 (1005)
R265	1-208-855-81	s RES, CHIP 47 (1005)
R266	1-208-855-81	s RES, CHIP 47 (1005)
R267	1-208-855-81	s RES, CHIP 47 (1005)
R268	1-208-855-81	s RES, CHIP 47 (1005)
R269	1-208-887-81	s RES, CHIP 1.0K (1005)
R270	1-208-887-81	s RES, CHIP 1.0K (1005)
R271	1-208-887-81	s RES, CHIP 1.0K (1005)
R272	1-208-887-81	s RES, CHIP 1.0K (1005)
R273	1-208-887-81	s RES, CHIP 1.0K (1005)
R274	1-208-879-81	s RES, CHIP 470 (1005)
R275	1-220-870-81	s RES, CHIP 10 (1005)
R276	1-220-870-81	s RES, CHIP 10 (1005)
R277	1-220-870-81	s RES, CHIP 10 (1005)
R278	1-220-878-81	s RES, CHIP 22 (1005)
R279	1-220-878-81	s RES, CHIP 22 (1005)
R280	1-208-915-81	s RES, CHIP 15K (1005)
R281	1-208-911-81	s RES, CHIP 10K (1005)
R282	1-208-935-81	s RES, CHIP 100K (1005)
R283	1-218-990-81	s CONDUCTOR, CHIP (1005)
R284	1-208-887-81	s RES, CHIP 1.0K (1005)
R285	1-208-887-81	s RES, CHIP 1.0K (1005)
R286	1-208-895-81	s RES, CHIP 2.2K (1005)
R287	1-208-863-81	s RES, CHIP 100 (1005)
R288	1-208-863-81	s RES, CHIP 100 (1005)
R289	1-208-871-81	s RES, CHIP 220 (1005)
R290	1-208-899-81	s RES, CHIP 3.3K (1005)
R291	1-208-895-81	s RES, CHIP 2.2K (1005)
R292	1-208-927-81	s RES, CHIP 47K (1005)
R293	1-208-863-81	s RES, CHIP 100 (1005)
R294	1-218-990-81	s CONDUCTOR, CHIP (1005)
R295	1-218-990-81	s CONDUCTOR, CHIP (1005)
R296	1-208-863-81	s RES, CHIP 100 (1005)
R297	1-218-990-81	s CONDUCTOR, CHIP (1005)
R298	1-218-990-81	s CONDUCTOR, CHIP (1005)
R308	1-208-879-81	s RES, CHIP 470 (1005)
R311	1-208-879-81	s RES, CHIP 470 (1005)
R313	1-208-879-81	s RES, CHIP 470 (1005)
R319	1-208-879-81	s RES, CHIP 470 (1005)
R321	1-208-879-81	s RES, CHIP 470 (1005)
R323	1-208-879-81	s RES, CHIP 470 (1005)
R324	1-208-887-81	s RES, CHIP 1.0K (1005)
R325	1-208-887-81	s RES, CHIP 1.0K (1005)
R326	1-208-887-81	s RES, CHIP 1.0K (1005)
R327	1-208-887-81	s RES, CHIP 1.0K (1005)
R328	1-208-887-81	s RES, CHIP 1.0K (1005)
R329	1-208-887-81	s RES, CHIP 1.0K (1005)
R332	1-208-887-81	s RES, CHIP 1.0K (1005)
R333	1-208-887-81	s RES, CHIP 1.0K (1005)
R334	1-208-887-81	s RES, CHIP 1.0K (1005)
R335	1-208-887-81	s RES, CHIP 1.0K (1005)
R337	1-208-887-81	s RES, CHIP 1.0K (1005)
R338	1-208-887-81	s RES, CHIP 1.0K (1005)
R345	1-208-671-11	s RES, CHIP 330 (1005)
R346	1-208-671-11	s RES, CHIP 330 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R347	1-208-671-11	s RES, CHIP 330 (1005)
R348	1-208-903-81	s RES, CHIP 4.7K (1005)
R349	1-208-903-81	s RES, CHIP 4.7K (1005)
R350	1-208-903-81	s RES, CHIP 4.7K (1005)
R351	1-208-903-81	s RES, CHIP 4.7K (1005)
R352	1-208-903-81	s RES, CHIP 4.7K (1005)
R353	1-208-903-81	s RES, CHIP 4.7K (1005)
R354	1-208-935-81	s RES, CHIP 100K (1005)
R356	1-208-935-81	s RES, CHIP 100K (1005)
R358	1-208-935-81	s RES, CHIP 100K (1005)
R359	1-208-859-81	s RES, CHIP 68 (1005)
R360	1-208-859-81	s RES, CHIP 68 (1005)
R361	1-208-859-81	s RES, CHIP 68 (1005)
R363	1-208-671-11	s RES, CHIP 330 (1005)
R364	1-208-671-11	s RES, CHIP 330 (1005)
R365	1-208-671-11	s RES, CHIP 330 (1005)
R366	1-208-883-81	s RES, CHIP 680 (1005)
R367	1-208-879-81	s RES, CHIP 470 (1005)
R368	1-208-883-81	s RES, CHIP 680 (1005)
R369	1-208-911-81	s RES, CHIP 10K (1005)
R370	1-208-911-81	s RES, CHIP 10K (1005)
R371	1-220-878-81	s RES, CHIP 22 (1005)
R372	1-218-990-81	s CONDUCTOR, CHIP (1005)
R373	1-208-863-81	s RES, CHIP 100 (1005)
R374	1-218-990-81	s CONDUCTOR, CHIP (1005)
R375	1-220-878-81	s RES, CHIP 22 (1005)
R376	1-220-878-81	s RES, CHIP 22 (1005)
R377	1-220-878-81	s RES, CHIP 22 (1005)
R378	1-208-855-81	s RES, CHIP 47 (1005)
R379	1-208-855-81	s RES, CHIP 47 (1005)
R380	1-208-855-81	s RES, CHIP 47 (1005)
R381	1-218-990-81	s CONDUCTOR, CHIP (1005)
R382	1-218-990-81	s CONDUCTOR, CHIP (1005)
R383	1-218-990-81	s CONDUCTOR, CHIP (1005)
R384	1-208-911-81	s RES, CHIP 10K (1005)
R385	1-208-911-81	s RES, CHIP 10K (1005)
R386	1-208-911-81	s RES, CHIP 10K (1005)
R387	1-208-903-81	s RES, CHIP 4.7K (1005)
R388	1-208-715-11	s RES, CHIP 22K (1005)
R389	1-208-715-11	s RES, CHIP 22K (1005)
R390	1-208-715-11	s RES, CHIP 22K (1005)
R392	1-218-990-81	s CONDUCTOR, CHIP (1005)
R393	1-208-935-81	s RES, CHIP 100K (1005)
R395	1-208-863-81	s RES, CHIP 100 (1005)
R396	1-218-990-81	s CONDUCTOR, CHIP (1005)
R397	1-220-878-81	s RES, CHIP 22 (1005)
R398	1-220-878-81	s RES, CHIP 22 (1005)
R399	1-220-878-81	s RES, CHIP 22 (1005)
R400	1-208-863-81	s RES, CHIP 100 (1005)
R401	1-208-871-81	s RES, CHIP 220 (1005)
R403	1-218-990-81	s CONDUCTOR, CHIP (1005)
R405	1-208-939-81	s RES, CHIP 150K (1005)
R406	1-208-923-81	s RES, CHIP 33K (1005)
R407	1-208-923-81	s RES, CHIP 33K (1005)
R408	1-208-903-81	s RES, CHIP 4.7K (1005)
R410	1-208-871-81	s RES, CHIP 220 (1005)
R411	1-218-989-11	s RES, CHIP 1M (1005)
R412	1-218-989-11	s RES, CHIP 1M (1005)
R413	1-208-887-81	s RES, CHIP 1.0K (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R414	1-208-911-81	s RES, CHIP 10K (1005)
R415	1-208-915-81	s RES, CHIP 15K (1005)
R417	1-208-931-81	s RES, CHIP 68K (1005)
R418	1-218-990-81	s CONDUCTOR, CHIP (1005)
R419	1-208-931-81	s RES, CHIP 68K (1005)
R420	1-208-923-81	s RES, CHIP 33K (1005)
R421	1-208-923-81	s RES, CHIP 33K (1005)
R422	1-208-903-81	s RES, CHIP 4.7K (1005)
R424	1-208-939-81	s RES, CHIP 150K (1005)
R425	1-208-943-81	s RES, CHIP 220K (1005)
R426	1-208-927-81	s RES, CHIP 47K (1005)
R427	1-208-943-81	s RES, CHIP 220K (1005)
R428	1-208-927-81	s RES, CHIP 47K (1005)
R431	1-208-911-81	s RES, CHIP 10K (1005)
R432	1-208-911-81	s RES, CHIP 10K (1005)
R433	1-208-935-81	s RES, CHIP 100K (1005)
R434	1-208-911-81	s RES, CHIP 10K (1005)
R435	1-208-911-81	s RES, CHIP 10K (1005)
R436	1-208-931-81	s RES, CHIP 68K (1005)
R437	1-208-947-81	s RES, CHIP 330K (1005)
R438	1-208-911-81	s RES, CHIP 10K (1005)
R439	1-208-935-81	s RES, CHIP 100K (1005)
R440	1-208-915-81	s RES, CHIP 15K (1005)
R441	1-208-903-81	s RES, CHIP 4.7K (1005)
R442	1-208-903-81	s RES, CHIP 4.7K (1005)
R447	1-208-927-81	s RES, CHIP 47K (1005)
R448	1-208-915-81	s RES, CHIP 15K (1005)
R449	1-208-903-81	s RES, CHIP 4.7K (1005)
R450	1-208-715-11	s RES, CHIP 22K (1005)
R451	1-208-715-11	s RES, CHIP 22K (1005)
R452	1-208-903-81	s RES, CHIP 4.7K (1005)
R453	1-208-715-11	s RES, CHIP 22K (1005)
R454	1-208-931-81	s RES, CHIP 68K (1005)
R455	1-208-911-81	s RES, CHIP 10K (1005)
R456	1-208-863-81	s RES, CHIP 100 (1005)
R457	1-208-911-81	s RES, CHIP 10K (1005)
R458	1-208-863-81	s RES, CHIP 100 (1005)
R459	1-208-863-81	s RES, CHIP 100 (1005)
R460	1-208-863-81	s RES, CHIP 100 (1005)
R461	1-208-863-81	s RES, CHIP 100 (1005)
R462	1-208-863-81	s RES, CHIP 100 (1005)
R463	1-208-895-81	s RES, CHIP 2.2K (1005)
R464	1-208-895-81	s RES, CHIP 2.2K (1005)
R465	1-208-927-81	s RES, CHIP 47K (1005)
R466	1-208-915-81	s RES, CHIP 15K (1005)
R467	1-208-911-81	s RES, CHIP 10K (1005)
R468	1-208-895-81	s RES, CHIP 2.2K (1005)
R470	1-208-715-11	s RES, CHIP 22K (1005)
R471	1-208-911-81	s RES, CHIP 10K (1005)
R472	1-208-863-81	s RES, CHIP 100 (1005)
R473	1-208-927-81	s RES, CHIP 47K (1005)
R474	1-208-935-81	s RES, CHIP 100K (1005)
R475	1-208-927-81	s RES, CHIP 47K (1005)
R476	1-208-895-81	s RES, CHIP 2.2K (1005)
R477	1-208-887-81	s RES, CHIP 1.0K (1005)
R478	1-208-895-81	s RES, CHIP 2.2K (1005)
R479	1-208-911-81	s RES, CHIP 10K (1005)
R480	1-220-870-81	s RES, CHIP 10 (1005)
R481	1-208-911-81	s RES, CHIP 10K (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R482	1-220-870-81	s RES, CHIP 10 (1005)
R483	1-208-715-11	s RES, CHIP 22K (1005)
R484	1-220-870-81	s RES, CHIP 10 (1005)
R487	1-208-911-81	s RES, CHIP 10K (1005)
R488	1-208-863-81	s RES, CHIP 100 (1005)
R489	1-220-870-81	s RES, CHIP 10 (1005)
R490	1-208-855-81	s RES, CHIP 47 (1005)
R491	1-208-863-81	s RES, CHIP 100 (1005)
R492	1-208-943-81	s RES, CHIP 220K (1005)
R500	1-208-863-81	s RES, CHIP 100 (1005)
R501	1-208-863-81	s RES, CHIP 100 (1005)
R502	1-208-911-81	s RES, CHIP 10K (1005)
R503	1-208-911-81	s RES, CHIP 10K (1005)
R505	1-208-863-81	s RES, CHIP 100 (1005)
R506	1-208-863-81	s RES, CHIP 100 (1005)
R507	1-208-927-81	s RES, CHIP 47K (1005)
R508	1-208-927-81	s RES, CHIP 47K (1005)
R511	1-208-863-81	s RES, CHIP 100 (1005)
R513	1-208-863-81	s RES, CHIP 100 (1005)
R514	1-208-863-81	s RES, CHIP 100 (1005)
R515	1-208-863-81	s RES, CHIP 100 (1005)
R519	1-208-863-81	s RES, CHIP 100 (1005)
R520	1-208-863-81	s RES, CHIP 100 (1005)
R524	1-220-878-81	s RES, CHIP 22 (1005)
R526	1-220-878-81	s RES, CHIP 22 (1005)
R528	1-220-878-81	s RES, CHIP 22 (1005)
R537	1-208-863-81	s RES, CHIP 100 (1005)
R545	1-208-863-81	s RES, CHIP 100 (1005)
R600	1-208-863-81	s RES, CHIP 100 (1005)
R601	1-208-895-81	s RES, CHIP 2.2K (1005)
R602	1-208-895-81	s RES, CHIP 2.2K (1005)
R604	1-208-855-81	s RES, CHIP 47 (1005)
R605	1-208-855-81	s RES, CHIP 47 (1005)
R606	1-208-863-81	s RES, CHIP 100 (1005)
R607	1-208-863-81	s RES, CHIP 100 (1005)
R608	1-208-863-81	s RES, CHIP 100 (1005)
R609	1-208-855-81	s RES, CHIP 47 (1005)
R610	1-208-911-81	s RES, CHIP 10K (1005)
R611	1-208-863-81	s RES, CHIP 100 (1005)
R612	1-208-863-81	s RES, CHIP 100 (1005)
R613	1-208-863-81	s RES, CHIP 100 (1005)
R614	1-208-863-81	s RES, CHIP 100 (1005)
R615	1-208-863-81	s RES, CHIP 100 (1005)
R800	1-208-863-81	s RES, CHIP 100 (1005)
R801	1-208-863-81	s RES, CHIP 100 (1005)
R802	1-208-863-81	s RES, CHIP 100 (1005)
R803	1-208-863-81	s RES, CHIP 100 (1005)
R804	1-208-863-81	s RES, CHIP 100 (1005)
R805	1-208-863-81	s RES, CHIP 100 (1005)
R806	1-208-911-81	s RES, CHIP 10K (1005)
R807	1-208-911-81	s RES, CHIP 10K (1005)
R808	1-208-863-81	s RES, CHIP 100 (1005)
R809	1-208-863-81	s RES, CHIP 100 (1005)
R810	1-208-863-81	s RES, CHIP 100 (1005)
R811	1-208-863-81	s RES, CHIP 100 (1005)
R812	1-208-911-81	s RES, CHIP 10K (1005)
R813	1-208-911-81	s RES, CHIP 10K (1005)
R814	1-208-911-81	s RES, CHIP 10K (1005)
R815	1-208-863-81	s RES, CHIP 100 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R816	1-208-863-81	s RES, CHIP 100 (1005)
R817	1-208-911-81	s RES, CHIP 10K (1005)
R818	1-208-911-81	s RES, CHIP 10K (1005)
R819	1-208-863-81	s RES, CHIP 100 (1005)
R820	1-208-863-81	s RES, CHIP 100 (1005)
R821	1-208-911-81	s RES, CHIP 10K (1005)
R822	1-208-863-81	s RES, CHIP 100 (1005)
R823	1-208-863-81	s RES, CHIP 100 (1005)
R824	1-208-911-81	s RES, CHIP 10K (1005)
R825	1-208-863-81	s RES, CHIP 100 (1005)
R826	1-208-863-81	s RES, CHIP 100 (1005)
R827	1-208-911-81	s RES, CHIP 10K (1005)
R828	1-208-863-81	s RES, CHIP 100 (1005)
R830	1-218-990-81	s CONDUCTOR, CHIP (1005)
R831	1-208-911-81	s RES, CHIP 10K (1005)
R832	1-208-863-81	s RES, CHIP 100 (1005)
R833	1-208-863-81	s RES, CHIP 100 (1005)
R834	1-218-990-81	s CONDUCTOR, CHIP (1005)
R835	1-218-990-81	s CONDUCTOR, CHIP (1005)
R836	1-208-855-81	s RES, CHIP 47 (1005)
R837	1-220-878-81	s RES, CHIP 22 (1005)
R838	1-220-878-81	s RES, CHIP 22 (1005)
R1001	1-208-863-81	s RES, CHIP 100 (1005)
R1002	1-208-863-81	s RES, CHIP 100 (1005)
R1003	1-220-870-81	s RES, CHIP 10 (1005)
R1004	1-220-870-81	s RES, CHIP 10 (1005)
R1006	1-208-863-81	s RES, CHIP 100 (1005)
R1008	1-208-863-81	s RES, CHIP 100 (1005)
R1009	1-208-863-81	s RES, CHIP 100 (1005)
R1010	1-208-863-81	s RES, CHIP 100 (1005)
R1011	1-208-863-81	s RES, CHIP 100 (1005)
R1012	1-208-863-81	s RES, CHIP 100 (1005)
R1013	1-208-863-81	s RES, CHIP 100 (1005)
R1015	1-220-870-81	s RES, CHIP 10 (1005)
R1016	1-220-870-81	s RES, CHIP 10 (1005)
R1017	1-208-863-81	s RES, CHIP 100 (1005)
R1018	1-208-863-81	s RES, CHIP 100 (1005)
R1019	1-208-863-81	s RES, CHIP 100 (1005)
R1022	1-208-863-81	s RES, CHIP 100 (1005)
R1025	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1026	1-208-935-81	s RES, CHIP 100K (1005)
R1029	1-220-870-81	s RES, CHIP 10 (1005)
R1030	1-208-935-81	s RES, CHIP 100K (1005)
R1031	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1032	1-220-878-81	s RES, CHIP 22 (1005)
R1033	1-220-878-81	s RES, CHIP 22 (1005)
R1034	1-220-878-81	s RES, CHIP 22 (1005)
R1035	1-220-878-81	s RES, CHIP 22 (1005)
R1036	1-220-878-81	s RES, CHIP 22 (1005)
R1037	1-220-878-81	s RES, CHIP 22 (1005)
R1038	1-220-878-81	s RES, CHIP 22 (1005)
R1039	1-220-878-81	s RES, CHIP 22 (1005)
R1040	1-208-863-81	s RES, CHIP 100 (1005)
R1042	1-220-870-81	s RES, CHIP 10 (1005)
R1100	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1101	1-208-863-81	s RES, CHIP 100 (1005)
R1102	1-208-863-81	s RES, CHIP 100 (1005)
R1103	1-208-943-81	s RES, CHIP 220K (1005)
R1104	1-220-870-81	s RES, CHIP 10 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1105	1-208-863-81	s RES, CHIP 100 (1005)
R1106	1-208-863-81	s RES, CHIP 100 (1005)
R1107	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1108	1-208-935-81	s RES, CHIP 100K (1005)
R1109	1-208-863-81	s RES, CHIP 100 (1005)
R1110	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1111	1-208-911-81	s RES, CHIP 10K (1005)
R1112	1-208-911-81	s RES, CHIP 10K (1005)
R1113	1-208-903-81	s RES, CHIP 4.7K (1005)
R1114	1-208-903-81	s RES, CHIP 4.7K (1005)
R1115	1-208-671-11	s RES, CHIP 330 (1005)
R1116	1-208-903-81	s RES, CHIP 4.7K (1005)
R1118	1-208-903-81	s RES, CHIP 4.7K (1005)
R1119	1-208-903-81	s RES, CHIP 4.7K (1005)
R1120	1-208-863-81	s RES, CHIP 100 (1005)
R1121	1-208-863-81	s RES, CHIP 100 (1005)
R1122	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1123	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1124	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1125	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1126	1-208-860-81	s RES, CHIP 75 (1005)
R1127	1-208-943-81	s RES, CHIP 220K (1005)
R1128	1-208-855-81	s RES, CHIP 47 (1005)
R1129	1-220-870-81	s RES, CHIP 10 (1005)
R1130	1-208-860-81	s RES, CHIP 75 (1005)
R1133	1-220-882-81	s RES, CHIP 33 (1005)
R1134	1-208-887-81	s RES, CHIP 1.0K (1005)
R1135	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1137	1-208-863-81	s RES, CHIP 100 (1005)
R1138	1-208-943-81	s RES, CHIP 220K (1005)
R1139	1-208-943-81	s RES, CHIP 220K (1005)
R1141	1-208-943-81	s RES, CHIP 220K (1005)
R1146	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1147	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1148	1-208-911-81	s RES, CHIP 10K (1005)
R1149	1-208-915-81	s RES, CHIP 15K (1005)
R1150	1-208-887-81	s RES, CHIP 1.0K (1005)
R1151	1-220-878-81	s RES, CHIP 22 (1005)
R1155	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1156	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1166	1-220-882-81	s RES, CHIP 33 (1005)
R1167	1-220-882-81	s RES, CHIP 33 (1005)
R1172	1-208-856-81	s RES, CHIP 51 (1005)
R1173	1-208-856-81	s RES, CHIP 51 (1005)
R1174	1-208-856-81	s RES, CHIP 51 (1005)
R1175	1-208-856-81	s RES, CHIP 51 (1005)
R1178	1-220-878-81	s RES, CHIP 22 (1005)
R1179	1-208-883-81	s RES, CHIP 680 (1005)
R1180	1-220-878-81	s RES, CHIP 22 (1005)
R1181	1-208-883-81	s RES, CHIP 680 (1005)
R1182	1-208-860-81	s RES, CHIP 75 (1005)
R1183	1-208-860-81	s RES, CHIP 75 (1005)
R1184	1-208-860-81	s RES, CHIP 75 (1005)
R1185	1-208-860-81	s RES, CHIP 75 (1005)
R1186	1-208-867-81	s RES, CHIP 150 (1005)
R1187	1-208-867-81	s RES, CHIP 150 (1005)
R1192	1-208-911-81	s RES, CHIP 10K (1005)
R1193	1-208-911-81	s RES, CHIP 10K (1005)
R1194	1-220-882-81	s RES, CHIP 33 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1198	1-208-856-81	s RES, CHIP 51 (1005)
R1200	1-208-856-81	s RES, CHIP 51 (1005)
R1203	1-220-878-81	s RES, CHIP 22 (1005)
R1204	1-208-883-81	s RES, CHIP 680 (1005)
R1205	1-208-860-81	s RES, CHIP 75 (1005)
R1206	1-208-860-81	s RES, CHIP 75 (1005)
R1207	1-208-867-81	s RES, CHIP 150 (1005)
R1210	1-208-911-81	s RES, CHIP 10K (1005)
R1213	1-218-989-11	s RES, CHIP 1M (1005)
R1214	1-218-989-11	s RES, CHIP 1M (1005)
R1215	1-208-915-81	s RES, CHIP 15K (1005)
R1216	1-208-887-81	s RES, CHIP 1.0K (1005)
R1217	1-208-935-81	s RES, CHIP 100K (1005)
R1218	1-208-943-81	s RES, CHIP 220K (1005)
R1219	1-208-935-81	s RES, CHIP 100K (1005)
R1220	1-208-927-81	s RES, CHIP 47K (1005)
R1221	1-208-935-81	s RES, CHIP 100K (1005)
R1222	1-208-927-81	s RES, CHIP 47K (1005)
R1223	1-220-878-81	s RES, CHIP 22 (1005)
R1224	1-220-878-81	s RES, CHIP 22 (1005)
R1231	1-208-860-81	s RES, CHIP 75 (1005)
R1232	1-208-943-81	s RES, CHIP 220K (1005)
R1233	1-208-943-81	s RES, CHIP 220K (1005)
R1234	1-208-943-81	s RES, CHIP 220K (1005)
R1235	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1237	1-208-863-81	s RES, CHIP 100 (1005)
R1238	1-208-911-81	s RES, CHIP 10K (1005)
R1239	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1300	1-218-989-11	s RES, CHIP 1M (1005)
R1301	1-218-989-11	s RES, CHIP 1M (1005)
R1302	1-218-989-11	s RES, CHIP 1M (1005)
R1303	1-218-989-11	s RES, CHIP 1M (1005)
R1304	1-208-915-81	s RES, CHIP 15K (1005)
R1305	1-208-887-81	s RES, CHIP 1.0K (1005)
R1306	1-208-915-81	s RES, CHIP 15K (1005)
R1307	1-208-887-81	s RES, CHIP 1.0K (1005)
R1308	1-208-935-81	s RES, CHIP 100K (1005)
R1309	1-208-943-81	s RES, CHIP 220K (1005)
R1310	1-208-935-81	s RES, CHIP 100K (1005)
R1311	1-208-935-81	s RES, CHIP 100K (1005)
R1312	1-208-943-81	s RES, CHIP 220K (1005)
R1313	1-208-935-81	s RES, CHIP 100K (1005)
R1314	1-208-935-81	s RES, CHIP 100K (1005)
R1315	1-208-935-81	s RES, CHIP 100K (1005)
R1316	1-208-935-81	s RES, CHIP 100K (1005)
R1317	1-208-935-81	s RES, CHIP 100K (1005)
R1318	1-208-911-81	s RES, CHIP 10K (1005)
R1319	1-208-895-81	s RES, CHIP 2.2K (1005)
R1320	1-208-935-81	s RES, CHIP 100K (1005)
R1321	1-218-989-11	s RES, CHIP 1M (1005)
R1322	1-218-989-11	s RES, CHIP 1M (1005)
R1323	1-208-915-81	s RES, CHIP 15K (1005)
R1324	1-208-887-81	s RES, CHIP 1.0K (1005)
R1325	1-218-989-11	s RES, CHIP 1M (1005)
R1326	1-218-989-11	s RES, CHIP 1M (1005)
R1327	1-208-915-81	s RES, CHIP 15K (1005)
R1328	1-208-887-81	s RES, CHIP 1.0K (1005)
R1329	1-208-935-81	s RES, CHIP 100K (1005)
R1330	1-208-943-81	s RES, CHIP 220K (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1331	1-208-935-81	s RES, CHIP 100K (1005)
R1332	1-208-935-81	s RES, CHIP 100K (1005)
R1333	1-208-943-81	s RES, CHIP 220K (1005)
R1334	1-208-935-81	s RES, CHIP 100K (1005)
R1335	1-208-935-81	s RES, CHIP 100K (1005)
R1336	1-208-935-81	s RES, CHIP 100K (1005)
R1337	1-208-935-81	s RES, CHIP 100K (1005)
R1338	1-208-935-81	s RES, CHIP 100K (1005)
R1339	1-208-935-81	s RES, CHIP 100K (1005)
R1340	1-208-935-81	s RES, CHIP 100K (1005)
R1341	1-208-715-11	s RES, CHIP 22K (1005)
R1342	1-208-855-81	s RES, CHIP 47 (1005)
R1343	1-208-903-81	s RES, CHIP 4.7K (1005)
R1345	1-208-903-81	s RES, CHIP 4.7K (1005)
R1346	1-208-903-81	s RES, CHIP 4.7K (1005)
R1347	1-208-907-81	s RES, CHIP 6.8K (1005)
R1348	1-208-863-81	s RES, CHIP 100 (1005)
R1349	1-208-887-81	s RES, CHIP 1.0K (1005)
R1350	1-218-989-11	s RES, CHIP 1M (1005)
R1351	1-208-863-81	s RES, CHIP 100 (1005)
R1352	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1354	1-208-927-81	s RES, CHIP 47K (1005)
R1355	1-208-915-81	s RES, CHIP 15K (1005)
R1357	1-218-989-11	s RES, CHIP 1M (1005)
R1358	1-218-989-11	s RES, CHIP 1M (1005)
R1359	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1360	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1361	1-208-935-81	s RES, CHIP 100K (1005)
R1362	1-208-935-81	s RES, CHIP 100K (1005)
R1363	1-208-911-81	s RES, CHIP 10K (1005)
R1364	1-208-911-81	s RES, CHIP 10K (1005)
R1365	1-208-943-81	s RES, CHIP 220K (1005)
R1366	1-208-927-81	s RES, CHIP 47K (1005)
R1367	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1368	1-208-887-81	s RES, CHIP 1.0K (1005)
R1369	1-208-891-81	s RES, CHIP 1.5K (1005)
R1371	1-208-935-81	s RES, CHIP 100K (1005)
R1372	1-208-863-81	s RES, CHIP 100 (1005)
R1373	1-220-870-81	s RES, CHIP 10 (1005)
R1374	1-208-903-81	s RES, CHIP 4.7K (1005)
R1375	1-208-903-81	s RES, CHIP 4.7K (1005)
R1376	1-208-863-81	s RES, CHIP 100 (1005)
R1377	1-208-863-81	s RES, CHIP 100 (1005)
R1378	1-208-903-81	s RES, CHIP 4.7K (1005)
R1379	1-208-903-81	s RES, CHIP 4.7K (1005)
R1380	1-208-903-81	s RES, CHIP 4.7K (1005)
R1381	1-208-903-81	s RES, CHIP 4.7K (1005)
R1382	1-208-911-81	s RES, CHIP 10K (1005)
R1383	1-208-911-81	s RES, CHIP 10K (1005)
R1384	1-208-903-81	s RES, CHIP 4.7K (1005)
R1385	1-208-903-81	s RES, CHIP 4.7K (1005)
R1386	1-208-863-81	s RES, CHIP 100 (1005)
R1387	1-208-863-81	s RES, CHIP 100 (1005)
R1388	1-208-863-81	s RES, CHIP 100 (1005)
R1389	1-208-863-81	s RES, CHIP 100 (1005)
R1391	1-208-887-81	s RES, CHIP 1.0K (1005)
R1392	1-218-989-11	s RES, CHIP 1M (1005)
R1393	1-208-943-81	s RES, CHIP 220K (1005)
R1395	1-208-903-81	s RES, CHIP 4.7K (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1396	1-208-903-81	s RES, CHIP 4.7K (1005)
R1397	1-208-903-81	s RES, CHIP 4.7K (1005)
R1398	1-208-927-81	s RES, CHIP 47K (1005)
R1399	1-208-927-81	s RES, CHIP 47K (1005)
R1401	1-208-863-81	s RES, CHIP 100 (1005)
R1402	1-208-927-81	s RES, CHIP 47K (1005)
R1403	1-208-863-81	s RES, CHIP 100 (1005)
R1404	1-208-863-81	s RES, CHIP 100 (1005)
R1406	1-208-863-81	s RES, CHIP 100 (1005)
R1408	1-208-863-81	s RES, CHIP 100 (1005)
R1501	1-208-863-81	s RES, CHIP 100 (1005)
R1502	1-208-903-81	s RES, CHIP 4.7K (1005)
R1503	1-208-863-81	s RES, CHIP 100 (1005)
R1504	1-208-863-81	s RES, CHIP 100 (1005)
R1505	1-208-903-81	s RES, CHIP 4.7K (1005)
R1506	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1507	1-208-863-81	s RES, CHIP 100 (1005)
R1508	1-208-923-81	s RES, CHIP 33K (1005)
R1509	1-208-879-81	s RES, CHIP 470 (1005)
R1510	1-208-867-81	s RES, CHIP 150 (1005)
R1511	1-208-895-81	s RES, CHIP 2.2K (1005)
R1512	1-208-899-81	s RES, CHIP 3.3K (1005)
R1513	1-208-899-81	s RES, CHIP 3.3K (1005)
R1514	1-208-879-81	s RES, CHIP 470 (1005)
R1515	1-208-671-11	s RES, CHIP 330 (1005)
R1516	1-208-863-81	s RES, CHIP 100 (1005)
R1517	1-208-883-81	s RES, CHIP 680 (1005)
R1518	1-208-911-81	s RES, CHIP 10K (1005)
R1519	1-208-873-81	s RES, CHIP 270 (1005)
R1521	1-208-887-81	s RES, CHIP 1.0K (1005)
R1522	1-208-907-81	s RES, CHIP 6.8K (1005)
R1523	1-208-879-81	s RES, CHIP 470 (1005)
R1524	1-220-878-81	s RES, CHIP 22 (1005)
R1525	1-208-863-81	s RES, CHIP 100 (1005)
R1526	1-208-863-81	s RES, CHIP 100 (1005)
R1527	1-208-863-81	s RES, CHIP 100 (1005)
R1528	1-208-863-81	s RES, CHIP 100 (1005)
R1529	1-208-903-81	s RES, CHIP 4.7K (1005)
R1530	1-208-935-81	s RES, CHIP 100K (1005)
R1531	1-220-878-81	s RES, CHIP 22 (1005)
R1532	1-220-870-81	s RES, CHIP 10 (1005)
R1533	1-220-878-81	s RES, CHIP 22 (1005)
R1535	1-208-871-81	s RES, CHIP 220 (1005)
R1536	1-208-863-81	s RES, CHIP 100 (1005)
R1539	1-220-878-81	s RES, CHIP 22 (1005)
R1540	1-220-878-81	s RES, CHIP 22 (1005)
R1541	1-208-887-81	s RES, CHIP 1.0K (1005)
R1542	1-208-955-81	s RES, CHIP 680K (1005)
R1543	1-208-891-81	s RES, CHIP 1.5K (1005)
R1544	1-208-855-81	s RES, CHIP 47 (1005)
R1545	1-208-903-81	s RES, CHIP 4.7K (1005)
R1546	1-208-903-81	s RES, CHIP 4.7K (1005)
R1547	1-208-887-81	s RES, CHIP 1.0K (1005)
R1548	1-208-891-81	s RES, CHIP 1.5K (1005)
R1551	1-208-903-81	s RES, CHIP 4.7K (1005)
R1554	1-208-671-11	s RES, CHIP 330 (1005)
R1555	1-208-873-81	s RES, CHIP 270 (1005)
R1556	1-208-855-81	s RES, CHIP 47 (1005)
R1557	1-208-887-81	s RES, CHIP 1.0K (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1558	1-220-882-81	s RES, CHIP 33 (1005)
R1559	1-208-903-81	s RES, CHIP 4.7K (1005)
R1562	1-208-863-81	s RES, CHIP 100 (1005)
R1563	1-208-887-81	s RES, CHIP 1.0K (1005)
R1564	1-208-887-81	s RES, CHIP 1.0K (1005)
R1565	1-220-878-81	s RES, CHIP 22 (1005)
R1566	1-208-903-81	s RES, CHIP 4.7K (1005)
R1567	1-208-863-81	s RES, CHIP 100 (1005)
R1568	1-208-863-81	s RES, CHIP 100 (1005)
R1569	1-208-863-81	s RES, CHIP 100 (1005)
R1570	1-208-863-81	s RES, CHIP 100 (1005)
R1571	1-220-878-81	s RES, CHIP 22 (1005)
R1572	1-208-887-81	s RES, CHIP 1.0K (1005)
R1573	1-208-891-81	s RES, CHIP 1.5K (1005)
R1574	1-208-903-81	s RES, CHIP 4.7K (1005)
R1575	1-208-903-81	s RES, CHIP 4.7K (1005)
R1576	1-208-887-81	s RES, CHIP 1.0K (1005)
R1577	1-208-891-81	s RES, CHIP 1.5K (1005)
R1578	1-208-863-81	s RES, CHIP 100 (1005)
R1579	1-208-863-81	s RES, CHIP 100 (1005)
R1580	1-208-860-81	s RES, CHIP 75 (1005)
R1581	1-208-923-81	s RES, CHIP 33K (1005)
R1582	1-208-860-81	s RES, CHIP 75 (1005)
R1583	1-218-989-11	s RES, CHIP 1M (1005)
R1584	1-208-887-81	s RES, CHIP 1.0K (1005)
R1585	1-208-899-81	s RES, CHIP 3.3K (1005)
R1586	1-208-715-11	s RES, CHIP 22K (1005)
R1587	1-208-923-81	s RES, CHIP 33K (1005)
R1588	1-208-923-81	s RES, CHIP 33K (1005)
R1589	1-208-895-81	s RES, CHIP 2.2K (1005)
R1590	1-218-989-11	s RES, CHIP 1M (1005)
R1591	1-208-911-81	s RES, CHIP 10K (1005)
R1592	1-208-927-81	s RES, CHIP 47K (1005)
R1593	1-208-855-81	s RES, CHIP 47 (1005)
R1594	1-208-935-81	s RES, CHIP 100K (1005)
R1595	1-208-895-81	s RES, CHIP 2.2K (1005)
R1596	1-208-855-81	s RES, CHIP 47 (1005)
R1597	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1598	1-208-935-81	s RES, CHIP 100K (1005)
R1599	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1600	1-208-887-81	s RES, CHIP 1.0K (1005)
R1601	1-208-903-81	s RES, CHIP 4.7K (1005)
R1602	1-208-895-81	s RES, CHIP 2.2K (1005)
R1603	1-208-883-81	s RES, CHIP 680 (1005)
R1604	1-208-887-81	s RES, CHIP 1.0K (1005)
R1605	1-208-903-81	s RES, CHIP 4.7K (1005)
R1606	1-208-899-81	s RES, CHIP 3.3K (1005)
R1607	1-208-899-81	s RES, CHIP 3.3K (1005)
R1608	1-208-899-81	s RES, CHIP 3.3K (1005)
R1609	1-208-671-11	s RES, CHIP 330 (1005)
R1610	1-208-895-81	s RES, CHIP 2.2K (1005)
R1611	1-208-895-81	s RES, CHIP 2.2K (1005)
R1612	1-208-671-11	s RES, CHIP 330 (1005)
R1613	1-208-887-81	s RES, CHIP 1.0K (1005)
R1614	1-208-903-81	s RES, CHIP 4.7K (1005)
R1615	1-208-887-81	s RES, CHIP 1.0K (1005)
R1616	1-208-903-81	s RES, CHIP 4.7K (1005)
R1617	1-208-883-81	s RES, CHIP 680 (1005)
R1618	1-208-671-11	s RES, CHIP 330 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1619	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1620	1-208-871-81 s	RES, CHIP 220 (1005)
R1621	1-208-871-81 s	RES, CHIP 220 (1005)
R1622	1-208-871-81 s	RES, CHIP 220 (1005)
R1623	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1624	1-220-878-81 s	RES, CHIP 22 (1005)
R1626	1-208-863-81 s	RES, CHIP 100 (1005)
R1627	1-208-860-81 s	RES, CHIP 75 (1005)
R1628	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1629	1-220-878-81 s	RES, CHIP 22 (1005)
R1630	1-220-878-81 s	RES, CHIP 22 (1005)
R1631	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1632	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1633	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1634	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1635	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1636	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1637	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1638	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1639	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1640	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1642	1-208-879-81 s	RES, CHIP 470 (1005)
R1643	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1644	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1645	1-220-878-81 s	RES, CHIP 22 (1005)
R1646	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1647	1-220-878-81 s	RES, CHIP 22 (1005)
R1648	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1649	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1650	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1651	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1652	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1653	1-208-891-81 s	RES, CHIP 1.5K (1005)
R1654	1-208-860-81 s	RES, CHIP 75 (1005)
R1655	1-208-855-81 s	RES, CHIP 47 (1005)
R1656	1-208-935-81 s	RES, CHIP 100K (1005)
R1657	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1658	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1659	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1660	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1661	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1662	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1663	1-208-883-81 s	RES, CHIP 680 (1005)
R1664	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1665	1-208-671-11 s	RES, CHIP 330 (1005)
R1666	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1667	1-208-863-81 s	RES, CHIP 100 (1005)
R1668	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1670	1-208-860-81 s	RES, CHIP 75 (1005)
R1671	1-208-860-81 s	RES, CHIP 75 (1005)
R1673	1-208-863-81 s	RES, CHIP 100 (1005)
R1675	1-208-927-81 s	RES, CHIP 47K (1005)
R1676	1-208-863-81 s	RES, CHIP 100 (1005)
R1677	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1678	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1679	1-208-899-81 s	RES, CHIP 3.3K (1005)
R1681	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1682	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1683	1-208-863-81 s	RES, CHIP 100 (1005)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1684	1-208-863-81 s	RES, CHIP 100 (1005)
R1685	1-208-863-81 s	RES, CHIP 100 (1005)
R1686	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1688	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1689	1-208-911-81 s	RES, CHIP 10K (1005)
R1690	1-208-911-81 s	RES, CHIP 10K (1005)
R1691	1-208-911-81 s	RES, CHIP 10K (1005)
R1692	1-208-915-81 s	RES, CHIP 15K (1005)
R1693	1-220-878-81 s	RES, CHIP 22 (1005)
R1694	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1695	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1697	1-218-990-81 s	CONDUCTOR, CHIP (1005)
RB300	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB301	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB302	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB303	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB304	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB305	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB306	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB307	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB308	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB309	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB310	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB311	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB312	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB313	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB314	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB315	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB316	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB317	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB318	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB319	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB320	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB321	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB322	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB323	1-234-382-21 s	RES, NETWORK 220K (1005X4)
RB400	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB500	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB501	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB503	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB504	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB505	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB506	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB507	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB508	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB605	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB606	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB607	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB608	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB609	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB610	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB611	1-234-373-21 s	RES, NETWORK 220 (1005X4)
RB612	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB613	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB614	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB615	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB616	1-234-372-21 s	RES, NETWORK 100 (1005X4)
RB617	1-234-372-21 s	RES, NETWORK 100 (1005X4)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description		
RB867	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB868	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB869	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB870	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB871	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB872	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB873	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB874	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB875	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB876	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB877	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB878	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB879	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB880	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB881	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB882	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB883	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB884	1-234-371-21	s	RES, NETWORK	47	(1005X4)
RB1000	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1001	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1002	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1003	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1004	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1005	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1006	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1007	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1008	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1009	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1010	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1011	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1012	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1013	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1014	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1015	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1016	1-234-370-21	s	RES, NETWORK	22	(1005X4)
RB1018	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1019	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1020	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1021	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1022	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1023	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1024	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1025	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1026	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1027	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1028	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1029	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1030	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1031	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1032	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1033	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1034	1-234-372-21	s	RES, NETWORK	100	(1005X4)
RB1035	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1036	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1037	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1038	1-234-369-21	s	RES, NETWORK	10	(1005X4)
RB1045	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1046	1-234-382-21	s	RES, NETWORK	220K	(1005X4)
RB1047	1-234-382-21	s	RES, NETWORK	220K	(1005X4)

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB1048	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1100	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB1101	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1104	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1105	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1106	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1107	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1108	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1109	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1110	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1111	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1112	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1113	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1115	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1116	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1117	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1118	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1119	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1120	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1300	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1301	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1302	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1309	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1313	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1328	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1329	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1330	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1331	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1332	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1333	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1334	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1335	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB1336	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1337	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1338	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1339	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1340	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB1341	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1500	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1501	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1502	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1503	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1504	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1505	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1506	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1507	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1508	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1509	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1510	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1512	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1513	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB1514	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1515	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1516	1-234-371-21	s RES, NETWORK 47 (1005X4)
TP400	1-535-877-22	s CHIP, CHECKER
TP401	1-535-877-22	s CHIP, CHECKER
TP1000	1-535-877-22	s CHIP, CHECKER
TP1001	1-535-877-22	s CHIP, CHECKER
TP1300	1-535-877-22	s CHIP, CHECKER

(DCP-49 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
TP1500	1-535-877-22	s CHIP, CHECKER
TP1501	1-535-877-22	s CHIP, CHECKER
VDR1	1-802-245-11	s ESD SUPPRESSOR
VDR2	1-802-245-11	s ESD SUPPRESSOR
VDR3	1-802-245-11	s ESD SUPPRESSOR
VDR4	1-802-245-11	s ESD SUPPRESSOR
X400	1-795-831-12	s OSCILLATOR, CRYSTAL (VCXO)3.3V

DET-45 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-127-A	s MOUNTED CIRCUIT BOARD, DET-45
CN1	1-818-210-21	s PIN, CONNECTOR 2P
S1	1-786-179-41	s SWITCH, PUSH (1KEY)

DET-47 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C2	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C3	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C4	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C5	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
CN1	1-817-054-21	s PIN, CONNECTOR 6P
D1	6-501-381-01	s DIODE CL-201IR-X-TSL-BC
Q1	6-550-988-01	s TRANSISTOR CPT-184S-C-TS-BCD
Q2	6-550-988-01	s TRANSISTOR CPT-184S-C-TS-BCD
Q3	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q4	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q5	8-729-929-09	s TRANSISTOR DTC123JE-TL
Q6	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
R1	1-208-927-81	s RES, CHIP 47K (1005)
R2	1-208-871-81	s RES, CHIP 220 (1005)
R3	1-208-911-81	s RES, CHIP 10K (1005)
R4	1-208-887-81	s RES, CHIP 1.0K (1005)
R5	1-208-919-81	s RES, CHIP 22K (1005)
R6	1-208-927-81	s RES, CHIP 47K (1005)
R7	1-208-911-81	s RES, CHIP 10K (1005)
R8	1-208-887-81	s RES, CHIP 1.0K (1005)
R9	1-208-919-81	s RES, CHIP 22K (1005)
R10	1-208-927-81	s RES, CHIP 47K (1005)
R11	1-208-919-81	s RES, CHIP 22K (1005)
R12	1-208-919-81	s RES, CHIP 22K (1005)
R13	1-208-871-81	s RES, CHIP 220 (1005)
R14	1-208-871-81	s RES, CHIP 220 (1005)

DR-606 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C100	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C101	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C102	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C103	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C104	1-114-288-11	s CAP, TANTALUM ELECT 22MF
C105	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C106	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C107	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C109	1-128-623-91	s CAP, CERAMIC 220PF B (0603)
C110	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C111	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C112	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
C113	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C114	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C115	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C116	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C117	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C118	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C119	1-114-288-11	s CAP, TANTALUM ELECT 22MF
C120	1-100-055-21	s CAP, CHIP CERAMIC 22MF B 3225
C121	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C122	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C123	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C124	1-114-288-11	s CAP, TANTALUM ELECT 22MF
C200	1-128-617-91	s CAP, CERAMIC 100PF CH (0603)
C201	1-128-617-91	s CAP, CERAMIC 100PF CH (0603)
C202	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C203	1-100-965-91	s CAP, CERAMIC 0.047MF B (0603)
C204	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C205	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C206	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C207	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C208	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C209	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C210	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C211	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C212	1-128-630-91	s CAP, CERAMIC 4700PF B (0603)
C213	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C214	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C215	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C216	1-128-629-91	s CAP, CERAMIC 3300PF B (0603)
C217	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C218	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C219	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C220	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C221	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C222	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C223	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C224	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C225	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C226	1-128-627-91	s CAP, CERAMIC 1000PF B (0603)
C227	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C228	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C229	1-128-617-91	s CAP, CERAMIC 100PF CH (0603)
C230	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C231	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C232	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C233	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C234	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C235	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C236	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C237	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C238	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C239	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C240	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C241	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C242	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C243	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C244	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C245	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C246	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C247	1-112-198-91	s CAP, CERAMIC 39PF CH (0603)
C300	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C301	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C302	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C303	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C304	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C305	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C306	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C307	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C308	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C309	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C310	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C311	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C312	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C313	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C314	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C315	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C316	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C317	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C318	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C319	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C320	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C321	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C322	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C323	1-128-617-91	s CAP, CERAMIC 100PF CH (0603)
C324	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C325	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C326	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C327	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C328	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C329	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C330	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C400	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C401	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C402	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C403	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C404	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C407	1-128-627-91	s CAP, CERAMIC 1000PF B (0603)
C408	1-128-627-91	s CAP, CERAMIC 1000PF B (0603)
C409	1-128-628-91	s CAP, CERAMIC 2200PF B (0603)
C410	1-128-628-91	s CAP, CERAMIC 2200PF B (0603)
C411	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C412	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C413	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C414	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C415	1-100-611-91	s CAP, CERAMIC 22MF C (2012)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C416	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C417	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C418	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C419	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C420	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C421	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C422	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C423	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C424	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C425	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C426	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C427	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C428	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C429	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C430	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C431	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C432	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C433	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C434	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C435	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C436	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C437	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C438	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C439	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C440	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C441	1-128-628-91	s	CAP, CERAMIC 2200PF B (0603)
C442	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C443	1-100-965-91	s	CAP, CERAMIC 0.047MF B (0603)
C444	1-100-965-91	s	CAP, CERAMIC 0.047MF B (0603)
C445	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C446	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C447	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C448	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C449	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C450	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C500	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C501	1-128-625-91	s	CAP, CERAMIC 470PF B (0603)
C502	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C503	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C504	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C505	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C506	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C507	1-128-626-91	s	CAP, CERAMIC 680PF B (0603)
C508	1-128-623-91	s	CAP, CERAMIC 220PF B (0603)
C509	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C510	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C511	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C512	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C513	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C514	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C515	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C516	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C517	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C524	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C525	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C526	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C527	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C528	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C529	1-127-715-91	s	CAP, CHIP CERAMIC 0.22MF B 1608

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C530	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C531	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C532	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C533	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C534	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C535	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C536	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C537	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C538	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C539	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C540	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C541	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C542	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C543	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C544	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C545	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C546	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C547	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C548	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C549	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C550	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C551	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C552	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C553	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C554	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C555	1-112-560-91	s	CAP, CERAMIC 0.022MF B (0603)
C556	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C557	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C558	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C559	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C560	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C561	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C562	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C563	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C564	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C565	1-128-611-91	s	CAP, CERAMIC 33PF CH (0603)
C566	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C567	1-128-627-91	s	CAP, CERAMIC 1000PF B (0603)
C568	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C569	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C570	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C571	1-128-611-91	s	CAP, CERAMIC 33PF CH (0603)
C572	1-100-672-91	s	CAP, CERAMIC 10MF C (3216)
C573	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C574	1-112-197-91	s	CAP, CERAMIC 10PF CH (0603)
C575	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C576	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C577	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C578	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C579	1-127-997-91	s	CAP, CERAMIC 7PF CH (0603)
C580	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C581	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C582	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C583	1-114-166-91	s	CAP, CERAMIC 0.01MF B (0603)
C584	1-128-617-91	s	CAP, CERAMIC 100PF CH (0603)
C585	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C600	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C601	1-112-716-91	s	CAP, CERAMIC 0.1UF B (0603)
C602	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C603	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C604	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C605	1-127-995-91	s CAP, CERAMIC 5PF CH (0603)
C606	1-127-995-91	s CAP, CERAMIC 5PF CH (0603)
C607	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C608	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C609	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C610	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C611	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C612	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C613	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C614	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C615	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C616	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C617	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C618	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C619	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C620	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C621	1-112-560-91	s CAP, CERAMIC 0.022MF B (0603)
C622	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C623	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C624	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C625	1-114-166-91	s CAP, CERAMIC 0.01MF B (0603)
C626	1-128-623-91	s CAP, CERAMIC 220PF B (0603)
C627	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C628	1-128-625-91	s CAP, CERAMIC 470PF B (0603)
C629	1-128-625-91	s CAP, CERAMIC 470PF B (0603)
C630	1-128-623-91	s CAP, CERAMIC 220PF B (0603)
C631	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C632	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C633	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C634	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C635	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C636	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C637	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C638	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C639	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C640	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C700	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C701	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C702	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C703	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C704	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C705	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C706	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C707	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C708	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C709	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C710	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C711	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C712	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C713	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C714	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C715	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C716	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C717	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C718	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C719	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C720	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C721	1-114-289-11	s CAP, TANTALUM ELECT 33MF
C722	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C723	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C724	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C727	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C729	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C730	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C731	1-112-560-91	s CAP, CERAMIC 0.022MF B (0603)
C800	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
C900	1-128-611-91	s CAP, CERAMIC 33PF CH (0603)
C901	1-112-716-91	s CAP, CERAMIC 0.1UF B (0603)
CN100	1-815-889-21	s PIN, CONNECTOR (PC BOARD) 14P
CN102	1-817-920-22	s CONNECTOR, FPC (ZIF) 80P
CN200	1-764-243-31	o CONNECTOR (COAXIAL)
CN857	1-817-920-22	s CONNECTOR, FPC (ZIF) 80P
CN858	1-818-621-21	s CONNECTOR, FPC (ZIF) 30P
D100	8-719-051-04	s DIODE EC10QS04-TE12L5
D502	8-719-069-28	s DIODE 1SS400TE-61
D503	8-719-069-28	s DIODE 1SS400TE-61
D504	8-719-421-68	s DIODE MA132WK-TX
D505	6-501-361-01	s DIODE RB051LA-40TR
D900	8-719-056-22	s DIODE MA2S728-(K8).SO
E1	1-535-757-21	s CHIP, CHECKER
IC100	6-706-488-01	s IC TC7SH14FU(T5RSOYJF)
IC101	8-759-598-43	s IC TC7WH04FK(T85R)
IC102	6-702-762-01	s IC TC75S58FE(T85R)
IC103	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC104	6-703-928-01	s IC MAX1896EUT#TG16
IC109	8-759-655-22	s IC TC7WH34FK(T85R)
IC200	8-753-221-60	s IC CXA2686R-TL
IC201	8-759-561-46	s IC AD8014ARTZ-REEL7
IC202	8-759-590-34	s IC ADS7841E/2K5
IC301	6-702-058-01	s IC MD56V62160E-10LAZ03B
IC302	6-700-831-01	s IC TC7WZ74FK(T85R)
IC400	6-707-372-01	s IC TMC320BRD01
IC404	8-759-523-01	s IC TC74HC4052AFT(EL)
IC405	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC406	6-710-792-01	s IC NJU777F4-33(T82)
IC407	6-706-476-01	s IC TC7SET04FU(T5RSOJF)
IC408	6-706-476-01	s IC TC7SET04FU(T5RSOJF)
IC409	6-706-476-01	s IC TC7SET04FU(T5RSOJF)
IC411	6-706-488-01	s IC TC7SH14FU(T5RSOYJF)
IC412	6-706-488-01	s IC TC7SH14FU(T5RSOYJF)
IC413	6-706-489-01	s IC TC7SH32FU(T5RSOYJF)
IC414	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC500	6-705-074-01	s IC BD6671FM
IC501	8-759-668-90	s IC NJW4301M-TE2
IC502	6-700-196-01	s IC AN8499SH-E1V
IC503	6-700-196-01	s IC AN8499SH-E1V
IC506	6-706-488-01	s IC TC7SH14FU(T5RSOYJF)
IC507	6-706-488-01	s IC TC7SH14FU(T5RSOYJF)
IC508	6-706-478-01	s IC TC7SET08FU(T5RSOJF)
IC509	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC512	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC513	6-706-489-01	s IC TC7SH32FU(T5RSOYJF)
IC517	6-703-285-01	s IC S-812C33AUA-C2NT2G
IC518	6-704-512-01	s IC TPS62050DGSR

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC519	6-709-322-01	s	IC TC7WH123FK (TE85R)
IC520	6-706-481-01	s	IC TC7SET32FU (T5RSOJF)
IC521	6-706-476-01	s	IC TC7SET04FU (T5RSOJF)
IC522	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC523	6-706-478-01	s	IC TC7SET08FU (T5RSOJF)
IC524	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)
IC525	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC526	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC527	6-706-474-01	s	IC TC7SET00FU (T5RSOJF)
IC603	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC608	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC609	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC610	8-759-656-54	s	IC TC7WH14FK (TE85R)
IC611	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC612	6-710-830-01	s	IC RNA50C27AUSEL-E
IC613	6-704-567-01	s	IC R3112N451A-TR-FA
IC702	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC703	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC704	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC705	6-706-488-01	s	IC TC7SH14FU (T5RSOYJF)
IC706	6-710-861-01	s	IC TC7SET34FU (T5RSOYJF)
IC800	6-704-099-01	s	IC TC7WZ08FK (TE85R)
IC900	8-759-592-47	s	IC TC7SZ08FU (TE85R)
IC901	6-700-217-01	s	IC TC7SZ14FU (TE85R)
L100	1-481-210-21	s	INDUCTOR (SMALL TYPE) 4.7UH
L101	1-481-210-21	s	INDUCTOR (SMALL TYPE) 4.7UH
L102	1-400-790-21	s	INDUCTOR, CHIP 4.7UH (2518)
L200	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L201	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L202	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L300	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L301	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L400	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L401	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L500	1-400-791-21	s	INDUCTOR, CHIP 10UH (2518)
L501	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L502	1-400-791-21	s	INDUCTOR, CHIP 10UH (2518)
L600	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L601	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L700	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L701	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L702	1-400-789-21	s	INDUCTOR, CHIP 2.2UH (2518)
L703	1-469-551-21	s	INDUCTOR, CHIP 2.2UH (LB2016)
OC1	1-694-974-21	s	CONTACT TERMINAL
Q101	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q102	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q103	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q104	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q105	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q106	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q500	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q501	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q502	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q503	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q504	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q505	6-551-644-01	s	TRANSISTOR DTA123JMFS6T2L
Q506	8-729-929-09	s	TRANSISTOR DTC123JE-TL
Q507	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q509	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q510	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q511	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q600	6-551-671-01	s	TRANSISTOR HAT1069C-EL-E
Q700	6-550-384-01	s	TRANSISTOR DTC123JMFS6T2L
Q701	6-551-265-01	s	TRANSISTOR SI2307BDS-T1
Q800	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q801	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q802	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
Q803	8-729-144-81	s	TRANSISTOR 2SC4176T1B33B34B35
R100	1-240-676-91	s	RES, CHIP 22 (0603)
R101	1-240-676-91	s	RES, CHIP 22 (0603)
R102	1-240-676-91	s	RES, CHIP 22 (0603)
R103	1-240-707-91	s	RES, CHIP 10K (0603)
R104	1-240-808-91	s	RES, CHIP 10K (0603)
R105	1-240-794-91	s	RES, CHIP 2.7K (0603)
R106	1-240-707-91	s	RES, CHIP 10K (0603)
R107	1-240-707-91	s	RES, CHIP 10K (0603)
R108	1-240-808-91	s	RES, CHIP 10K (0603)
R111	1-240-810-91	s	RES, CHIP 12K (0603)
R112	1-240-827-91	s	RES, CHIP 75K (0603)
R113	1-240-718-91	s	RES, CHIP 100K (0603)
R114	1-240-718-91	s	RES, CHIP 100K (0603)
R116	1-240-729-91	s	RES, CHIP 1M (0603)
R117	1-240-683-91	s	RES, CHIP 100 (0603)
R118	1-240-718-91	s	RES, CHIP 100K (0603)
R119	1-240-707-91	s	RES, CHIP 10K (0603)
R120	1-240-707-91	s	RES, CHIP 10K (0603)
R121	1-240-683-91	s	RES, CHIP 100 (0603)
R122	1-240-711-91	s	RES, CHIP 22K (0603)
R123	1-240-718-91	s	RES, CHIP 100K (0603)
R124	1-240-718-91	s	RES, CHIP 100K (0603)
R200	1-240-707-91	s	RES, CHIP 10K (0603)
R201	1-240-707-91	s	RES, CHIP 10K (0603)
R202	1-240-711-91	s	RES, CHIP 22K (0603)
R203	1-240-711-91	s	RES, CHIP 22K (0603)
R204	1-240-683-91	s	RES, CHIP 100 (0603)
R205	1-240-695-91	s	RES, CHIP 1K (0603)
R206	1-240-695-91	s	RES, CHIP 1K (0603)
R207	1-240-695-91	s	RES, CHIP 1K (0603)
R208	1-240-695-91	s	RES, CHIP 1K (0603)
R209	1-240-683-91	s	RES, CHIP 100 (0603)
R210	1-240-683-91	s	RES, CHIP 100 (0603)
R211	1-240-676-91	s	RES, CHIP 22 (0603)
R212	1-240-676-91	s	RES, CHIP 22 (0603)
R300	1-240-683-91	s	RES, CHIP 100 (0603)
R301	1-240-693-91	s	RES, CHIP 680 (0603)
R302	1-240-773-91	s	RES, CHIP 360 (0603)
R303	1-240-683-91	s	RES, CHIP 100 (0603)
R304	1-240-707-91	s	RES, CHIP 10K (0603)
R305	1-240-762-91	s	RES, CHIP 120 (0603)
R306	1-240-683-91	s	RES, CHIP 100 (0603)
R307	1-240-707-91	s	RES, CHIP 10K (0603)
R308	1-240-762-91	s	RES, CHIP 120 (0603)
R309	1-240-683-91	s	RES, CHIP 100 (0603)
R310	1-240-718-91	s	RES, CHIP 100K (0603)
R311	1-240-718-91	s	RES, CHIP 100K (0603)
R312	1-240-676-91	s	RES, CHIP 22 (0603)
R313	1-240-758-91	s	RES, CHIP 82 (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R314	1-240-758-91	s RES, CHIP 82 (0603)
R315	1-694-535-91	s CONDUCTOR, CHIP (0603)
R316	1-240-758-91	s RES, CHIP 82 (0603)
R317	1-240-758-91	s RES, CHIP 82 (0603)
R318	1-240-758-91	s RES, CHIP 82 (0603)
R319	1-240-758-91	s RES, CHIP 82 (0603)
R320	1-240-758-91	s RES, CHIP 82 (0603)
R321	1-240-758-91	s RES, CHIP 82 (0603)
R322	1-240-758-91	s RES, CHIP 82 (0603)
R323	1-240-758-91	s RES, CHIP 82 (0603)
R324	1-694-535-91	s CONDUCTOR, CHIP (0603)
R325	1-694-535-91	s CONDUCTOR, CHIP (0603)
R326	1-240-676-91	s RES, CHIP 22 (0603)
R327	1-240-676-91	s RES, CHIP 22 (0603)
R328	1-240-676-91	s RES, CHIP 22 (0603)
R329	1-240-678-91	s RES, CHIP 33 (0603)
R330	1-240-678-91	s RES, CHIP 33 (0603)
R331	1-240-678-91	s RES, CHIP 33 (0603)
R332	1-240-678-91	s RES, CHIP 33 (0603)
R333	1-240-678-91	s RES, CHIP 33 (0603)
R334	1-240-678-91	s RES, CHIP 33 (0603)
R335	1-240-678-91	s RES, CHIP 33 (0603)
R336	1-240-678-91	s RES, CHIP 33 (0603)
R337	1-240-678-91	s RES, CHIP 33 (0603)
R338	1-240-678-91	s RES, CHIP 33 (0603)
R339	1-240-678-91	s RES, CHIP 33 (0603)
R340	1-240-678-91	s RES, CHIP 33 (0603)
R341	1-240-678-91	s RES, CHIP 33 (0603)
R342	1-240-678-91	s RES, CHIP 33 (0603)
R343	1-240-678-91	s RES, CHIP 33 (0603)
R344	1-240-678-91	s RES, CHIP 33 (0603)
R345	1-240-672-91	s RES, CHIP 10 (0603)
R400	1-246-191-91	s RES, CHIP 220K (0603)
R401	1-240-826-91	s RES, CHIP 68K (0603)
R402	1-240-796-91	s RES, CHIP 3.3K (0603)
R403	1-246-191-91	s RES, CHIP 220K (0603)
R404	1-240-826-91	s RES, CHIP 68K (0603)
R405	1-240-796-91	s RES, CHIP 3.3K (0603)
R406	1-240-830-91	s RES, CHIP 100K (0603)
R407	1-240-830-91	s RES, CHIP 100K (0603)
R408	1-240-711-91	s RES, CHIP 22K (0603)
R409	1-240-701-91	s RES, CHIP 3.3K (0603)
R410	1-240-701-91	s RES, CHIP 3.3K (0603)
R411	1-240-830-91	s RES, CHIP 100K (0603)
R412	1-240-830-91	s RES, CHIP 100K (0603)
R413	1-240-830-91	s RES, CHIP 100K (0603)
R414	1-240-830-91	s RES, CHIP 100K (0603)
R415	1-240-703-91	s RES, CHIP 4.7K (0603)
R416	1-240-703-91	s RES, CHIP 4.7K (0603)
R417	1-240-676-91	s RES, CHIP 22 (0603)
R418	1-240-676-91	s RES, CHIP 22 (0603)
R419	1-240-676-91	s RES, CHIP 22 (0603)
R420	1-240-676-91	s RES, CHIP 22 (0603)
R421	1-240-676-91	s RES, CHIP 22 (0603)
R422	1-240-676-91	s RES, CHIP 22 (0603)
R423	1-240-676-91	s RES, CHIP 22 (0603)
R424	1-240-676-91	s RES, CHIP 22 (0603)
R425	1-240-683-91	s RES, CHIP 100 (0603)
R426	1-240-703-91	s RES, CHIP 4.7K (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R427	1-240-722-91	s RES, CHIP 220K (0603)
R428	1-240-689-91	s RES, CHIP 330 (0603)
R429	1-240-689-91	s RES, CHIP 330 (0603)
R430	1-240-695-91	s RES, CHIP 1K (0603)
R431	1-218-990-81	s CONDUCTOR, CHIP (1005)
R432	1-240-689-91	s RES, CHIP 330 (0603)
R433	1-218-990-81	s CONDUCTOR, CHIP (1005)
R434	1-240-689-91	s RES, CHIP 330 (0603)
R435	1-240-718-91	s RES, CHIP 100K (0603)
R436	1-240-695-91	s RES, CHIP 1K (0603)
R437	1-240-718-91	s RES, CHIP 100K (0603)
R438	1-240-695-91	s RES, CHIP 1K (0603)
R439	1-240-695-91	s RES, CHIP 1K (0603)
R440	1-240-695-91	s RES, CHIP 1K (0603)
R441	1-240-695-91	s RES, CHIP 1K (0603)
R442	1-240-707-91	s RES, CHIP 10K (0603)
R443	1-240-822-91	s RES, CHIP 47K (0603)
R444	1-240-804-91	s RES, CHIP 6.8K (0603)
R500	1-240-714-91	s RES, CHIP 47K (0603)
R501	1-240-718-91	s RES, CHIP 100K (0603)
R502	1-240-718-91	s RES, CHIP 100K (0603)
R503	1-240-699-91	s RES, CHIP 2.2K (0603)
R504	1-240-808-91	s RES, CHIP 10K (0603)
R505	1-240-808-91	s RES, CHIP 10K (0603)
R506	1-240-699-91	s RES, CHIP 2.2K (0603)
R507	1-211-737-91	s RES, SQUARE TYPE CHIP 0.47 3225
R508	1-211-737-91	s RES, SQUARE TYPE CHIP 0.47 3225
R520	1-240-729-91	s RES, CHIP 1M (0603)
R521	1-240-683-91	s RES, CHIP 100 (0603)
R522	1-246-191-91	s RES, CHIP 220K (0603)
R523	1-246-191-91	s RES, CHIP 220K (0603)
R524	1-246-191-91	s RES, CHIP 220K (0603)
R525	1-246-191-91	s RES, CHIP 220K (0603)
R526	1-240-816-91	s RES, CHIP 22K (0603)
R527	1-240-816-91	s RES, CHIP 22K (0603)
R528	1-240-816-91	s RES, CHIP 22K (0603)
R529	1-240-816-91	s RES, CHIP 22K (0603)
R530	1-211-737-91	s RES, SQUARE TYPE CHIP 0.47 3225
R531	1-211-969-91	s RES, CHIP 10 (1608)
R532	1-211-737-91	s RES, SQUARE TYPE CHIP 0.47 3225
R533	1-211-969-91	s RES, CHIP 10 (1608)
R534	1-211-969-91	s RES, CHIP 10 (1608)
R535	1-240-808-91	s RES, CHIP 10K (0603)
R536	1-240-711-91	s RES, CHIP 22K (0603)
R537	1-240-808-91	s RES, CHIP 10K (0603)
R538	1-240-808-91	s RES, CHIP 10K (0603)
R539	1-240-808-91	s RES, CHIP 10K (0603)
R540	1-240-808-91	s RES, CHIP 10K (0603)
R541	1-218-233-91	s RES, SQUARE TYPE CHIP 47(4532)
R542	1-240-808-91	s RES, CHIP 10K (0603)
R543	1-218-233-91	s RES, SQUARE TYPE CHIP 47(4532)
R544	1-240-808-91	s RES, CHIP 10K (0603)
R545	1-240-808-91	s RES, CHIP 10K (0603)
R546	1-220-882-81	s RES, CHIP 33 (1005)
R547	1-220-882-81	s RES, CHIP 33 (1005)
R548	1-240-707-91	s RES, CHIP 10K (0603)
R549	1-240-707-91	s RES, CHIP 10K (0603)
R550	1-240-784-91	s RES, CHIP 1K (0603)
R551	1-240-784-91	s RES, CHIP 1K (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R552	1-240-784-91	s RES, CHIP 1K (0603)
R553	1-240-820-91	s RES, CHIP 33K (0603)
R554	1-240-820-91	s RES, CHIP 33K (0603)
R555	1-240-830-91	s RES, CHIP 100K (0603)
R556	1-240-718-91	s RES, CHIP 100K (0603)
R557	1-211-737-91	s RES,SQUARE TYPE CHIP 0.47 3225
R558	1-245-581-91	s RES, CHIP 1M (0603)
R559	1-245-581-91	s RES, CHIP 1M (0603)
R560	1-240-816-91	s RES, CHIP 22K (0603)
R561	1-240-695-91	s RES, CHIP 1K (0603)
R562	1-240-695-91	s RES, CHIP 1K (0603)
R563	1-240-695-91	s RES, CHIP 1K (0603)
R564	1-220-882-81	s RES, CHIP 33 (1005)
R565	1-220-882-81	s RES, CHIP 33 (1005)
R566	1-240-695-91	s RES, CHIP 1K (0603)
R567	1-240-695-91	s RES, CHIP 1K (0603)
R568	1-240-808-91	s RES, CHIP 10K (0603)
R569	1-240-820-91	s RES, CHIP 33K (0603)
R570	1-240-784-91	s RES, CHIP 1K (0603)
R571	1-240-784-91	s RES, CHIP 1K (0603)
R572	1-240-695-91	s RES, CHIP 1K (0603)
R573	1-240-683-91	s RES, CHIP 100 (0603)
R574	1-240-718-91	s RES, CHIP 100K (0603)
R575	1-240-683-91	s RES, CHIP 100 (0603)
R576	1-240-722-91	s RES, CHIP 220K (0603)
R577	1-240-722-91	s RES, CHIP 220K (0603)
R578	1-240-718-91	s RES, CHIP 100K (0603)
R579	1-240-726-91	s RES, CHIP 470K (0603)
R580	1-245-671-91	s RES,CHIP 39K
R581	1-240-720-91	s RES, CHIP 150K (0603)
R582	1-240-729-91	s RES, CHIP 1M (0603)
R583	1-240-714-91	s RES, CHIP 47K (0603)
R584	1-245-671-91	s RES,CHIP 39K
R585	1-240-784-91	s RES, CHIP 1K (0603)
R586	1-218-990-81	s CONDUCTOR, CHIP (1005)
R587	1-211-737-91	s RES,SQUARE TYPE CHIP 0.47 3225
R588	1-240-830-91	s RES, CHIP 100K (0603)
R589	1-240-830-91	s RES, CHIP 100K (0603)
R590	1-240-816-91	s RES, CHIP 22K (0603)
R591	1-240-816-91	s RES, CHIP 22K (0603)
R592	1-240-804-91	s RES, CHIP 6.8K (0603)
R593	1-240-804-91	s RES, CHIP 6.8K (0603)
R594	1-240-830-91	s RES, CHIP 100K (0603)
R595	1-240-830-91	s RES, CHIP 100K (0603)
R596	1-218-990-81	s CONDUCTOR, CHIP (1005)
R600	1-240-701-91	s RES, CHIP 3.3K (0603)
R601	1-240-695-91	s RES, CHIP 1K (0603)
R602	1-240-713-91	s RES, CHIP 33K (0603)
R603	1-240-695-91	s RES, CHIP 1K (0603)
R604	1-240-695-91	s RES, CHIP 1K (0603)
R605	1-240-707-91	s RES, CHIP 10K (0603)
R606	1-240-707-91	s RES, CHIP 10K (0603)
R607	1-240-722-91	s RES, CHIP 220K (0603)
R608	1-240-722-91	s RES, CHIP 220K (0603)
R609	1-240-695-91	s RES, CHIP 1K (0603)
R610	1-240-695-91	s RES, CHIP 1K (0603)
R611	1-240-695-91	s RES, CHIP 1K (0603)
R612	1-240-695-91	s RES, CHIP 1K (0603)
R613	1-240-707-91	s RES, CHIP 10K (0603)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R616	1-240-722-91	s RES, CHIP 220K (0603)
R617	1-240-676-91	s RES, CHIP 22 (0603)
R618	1-240-729-91	s RES, CHIP 1M (0603)
R619	1-240-722-91	s RES, CHIP 220K (0603)
R620	1-240-703-91	s RES, CHIP 4.7K (0603)
R621	1-240-722-91	s RES, CHIP 220K (0603)
R622	1-240-672-91	s RES, CHIP 10 (0603)
R623	1-240-701-91	s RES, CHIP 3.3K (0603)
R624	1-240-705-91	s RES, CHIP 6.8K (0603)
R625	1-240-718-91	s RES, CHIP 100K (0603)
R626	1-240-703-91	s RES, CHIP 4.7K (0603)
R627	1-240-718-91	s RES, CHIP 100K (0603)
R628	1-240-707-91	s RES, CHIP 10K (0603)
R629	1-240-683-91	s RES, CHIP 100 (0603)
R630	1-240-722-91	s RES, CHIP 220K (0603)
R631	1-240-729-91	s RES, CHIP 1M (0603)
R632	1-240-683-91	s RES, CHIP 100 (0603)
R633	1-240-683-91	s RES, CHIP 100 (0603)
R634	1-240-718-91	s RES, CHIP 100K (0603)
R635	1-240-718-91	s RES, CHIP 100K (0603)
R636	1-240-676-91	s RES, CHIP 22 (0603)
R700	1-240-707-91	s RES, CHIP 10K (0603)
R701	1-240-707-91	s RES, CHIP 10K (0603)
R702	1-240-707-91	s RES, CHIP 10K (0603)
R703	1-240-707-91	s RES, CHIP 10K (0603)
R704	1-240-707-91	s RES, CHIP 10K (0603)
R705	1-240-707-91	s RES, CHIP 10K (0603)
R706	1-240-695-91	s RES, CHIP 1K (0603)
R707	1-240-707-91	s RES, CHIP 10K (0603)
R708	1-240-707-91	s RES, CHIP 10K (0603)
R709	1-240-707-91	s RES, CHIP 10K (0603)
R710	1-240-720-91	s RES, CHIP 150K (0603)
R711	1-240-718-91	s RES, CHIP 100K (0603)
R712	1-240-722-91	s RES, CHIP 220K (0603)
R713	1-240-718-91	s RES, CHIP 100K (0603)
R717	1-240-695-91	s RES, CHIP 1K (0603)
R720	1-240-729-91	s RES, CHIP 1M (0603)
R721	1-240-714-91	s RES, CHIP 47K (0603)
R722	1-240-707-91	s RES, CHIP 10K (0603)
R800	1-694-535-91	s CONDCTOR, CHIP (0603)
R801	1-694-535-91	s CONDCTOR, CHIP (0603)
R802	1-694-535-91	s CONDCTOR, CHIP (0603)
R803	1-694-535-91	s CONDCTOR, CHIP (0603)
R806	1-240-774-91	s RES, CHIP 390 (0603)
R807	1-240-778-91	s RES, CHIP 560 (0603)
R808	1-240-760-91	s RES, CHIP 100 (0603)
R809	1-240-784-91	s RES, CHIP 1K (0603)
R810	1-240-774-91	s RES, CHIP 390 (0603)
R811	1-240-778-91	s RES, CHIP 560 (0603)
R812	1-240-760-91	s RES, CHIP 100 (0603)
R813	1-240-784-91	s RES, CHIP 1K (0603)
R814	1-240-707-91	s RES, CHIP 10K (0603)
R900	1-240-780-91	s RES, CHIP 680 (0603)
RB100	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB300	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB301	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB302	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB303	1-234-378-21	s RES, NETWORK 10K (1005X4)

(DR-606 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB304	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB305	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB306	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB307	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB400	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB401	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB402	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB403	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB404	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB405	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB406	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB407	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB408	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB409	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB410	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB411	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB600	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB601	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB602	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB603	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB700	1-234-372-21	s RES, NETWORK 100 (1005X4)
RB701	1-234-382-21	s RES, NETWORK 220K (1005X4)
RY500	1-755-380-21	s RELAY
RY501	1-755-380-21	s RELAY
S600	1-786-675-11	s TACTILE SWITCH
X300	1-813-902-11	s OSCILLATOR, CRYSTAL (66MHZ)
X600	1-795-602-11	s VIBRATOR, CRYSTAL (32.768 KHz)

DR-617 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C23	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C26	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-100-986-21	s CAP, ELECT 330MF
C28	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C29	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C30	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C31	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C33	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C41	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C42	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C43	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C45	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C46	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C47	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C48	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C50	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C58	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
CN1	1-785-848-91	s CONNECTOR, BOARD TO BOARD 100P
CN2	1-774-391-21	o CONNECTOR, BOARD TO BOARD 60P
CN3	1-774-391-21	o CONNECTOR, BOARD TO BOARD 60P
CN4	1-774-391-21	o CONNECTOR, BOARD TO BOARD 60P

(DR-617 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D1	8-719-043-70	s DIODE MA6S121-(TX)
D2	8-719-043-70	s DIODE MA6S121-(TX)
D3	8-719-043-70	s DIODE MA6S121-(TX)
D4	8-719-043-70	s DIODE MA6S121-(TX)
D5	8-719-043-70	s DIODE MA6S121-(TX)
D6	8-719-043-70	s DIODE MA6S121-(TX)
E1	1-535-877-22	s CHIP, CHECKER
E2	1-535-877-22	s CHIP, CHECKER
FB1	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB4	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB5	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB6	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB8	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB9	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB10	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB11	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB12	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB13	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB14	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB15	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB16	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB17	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB18	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB19	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB20	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB21	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB22	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB23	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB24	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB25	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB26	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB27	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB28	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB29	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB30	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB31	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB32	1-469-100-21	s FERRITE, EMI (SMD) (1608)
FB33	1-469-100-21	s FERRITE, EMI (SMD) (1608)
IC1	6-711-375-01	s IC LT1964ES5-BYP#TR
IC2	6-703-181-01	s IC TC74VCX74FT(EL)
IC3	6-703-181-01	s IC TC74VCX74FT(EL)
IC4	6-702-319-01	s IC TC7WZ04FK(TE85R)
IC7	6-700-225-01	s IC TC74VCX157FT(EL)
IC8	8-759-573-97	s IC SN74LVC541APWR
IC9	8-759-573-97	s IC SN74LVC541APWR
IC10	6-708-326-01	s IC TC74HCT4053AFT(EL)
IC11	6-700-225-01	s IC TC74VCX157FT(EL)
IC12	6-700-225-01	s IC TC74VCX157FT(EL)
IC13	6-700-225-01	s IC TC74VCX157FT(EL)
IC14	6-700-225-01	s IC TC74VCX157FT(EL)
IC15	6-700-225-01	s IC TC74VCX157FT(EL)
IC16	6-700-225-01	s IC TC74VCX157FT(EL)
IC17	6-700-225-01	s IC TC74VCX157FT(EL)
IC18	6-700-225-01	s IC TC74VCX157FT(EL)

(DR-617 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC19	8-759-672-76	s IC AK9813BF-E2
IC21	8-759-592-48	s IC TC7SZ32FU(TE85R)
Q1	8-729-053-11	s TRANSISTOR FDC6561AN
Q2	8-729-053-12	s TRANSISTOR FDC6506P
Q3	8-729-053-11	s TRANSISTOR FDC6561AN
Q4	8-729-053-12	s TRANSISTOR FDC6506P
Q5	8-729-053-11	s TRANSISTOR FDC6561AN
Q6	8-729-053-12	s TRANSISTOR FDC6506P
Q7	8-729-053-11	s TRANSISTOR FDC6561AN
Q8	8-729-053-12	s TRANSISTOR FDC6506P
Q9	8-729-053-11	s TRANSISTOR FDC6561AN
Q10	8-729-053-12	s TRANSISTOR FDC6506P
R2	1-208-927-81	s RES, CHIP 47K (1005)
R3	1-208-911-81	s RES, CHIP 10K (1005)
R6	1-208-863-81	s RES, CHIP 100 (1005)
R7	1-208-863-81	s RES, CHIP 100 (1005)
R8	1-208-863-81	s RES, CHIP 100 (1005)
R9	1-208-863-81	s RES, CHIP 100 (1005)
R10	1-208-863-81	s RES, CHIP 100 (1005)
R11	1-220-870-81	s RES, CHIP 10 (1005)
R12	1-208-915-81	s RES, CHIP 15K (1005)
R13	1-208-911-81	s RES, CHIP 10K (1005)
R14	1-208-899-81	s RES, CHIP 3.3K (1005)
R15	1-218-990-81	s CONDUCTOR, CHIP (1005)
R18	1-218-990-81	s CONDUCTOR, CHIP (1005)
R19	1-218-990-81	s CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s CONDUCTOR, CHIP (1005)
R23	1-220-878-81	s RES, CHIP 22 (1005)
R24	1-220-878-81	s RES, CHIP 22 (1005)
R25	1-220-878-81	s RES, CHIP 22 (1005)
R26	1-208-859-81	s RES, CHIP 68 (1005)
R27	1-208-859-81	s RES, CHIP 68 (1005)
R28	1-208-859-81	s RES, CHIP 68 (1005)
R29	1-220-878-81	s RES, CHIP 22 (1005)
R30	1-220-878-81	s RES, CHIP 22 (1005)
R31	1-220-878-81	s RES, CHIP 22 (1005)
R32	1-220-878-81	s RES, CHIP 22 (1005)
R33	1-220-878-81	s RES, CHIP 22 (1005)
R35	1-208-855-81	s RES, CHIP 47 (1005)
R36	1-208-863-81	s RES, CHIP 100 (1005)
R37	1-208-863-81	s RES, CHIP 100 (1005)
R38	1-208-855-81	s RES, CHIP 47 (1005)
R39	1-208-855-81	s RES, CHIP 47 (1005)
R41	1-208-859-81	s RES, CHIP 68 (1005)
R42	1-208-859-81	s RES, CHIP 68 (1005)
R43	1-208-859-81	s RES, CHIP 68 (1005)
R44	1-208-859-81	s RES, CHIP 68 (1005)
R45	1-208-859-81	s RES, CHIP 68 (1005)
R46	1-208-859-81	s RES, CHIP 68 (1005)
R47	1-220-878-81	s RES, CHIP 22 (1005)
R48	1-208-855-81	s RES, CHIP 47 (1005)
R49	1-208-863-81	s RES, CHIP 100 (1005)
R50	1-208-863-81	s RES, CHIP 100 (1005)
R51	1-208-855-81	s RES, CHIP 47 (1005)
R52	1-208-855-81	s RES, CHIP 47 (1005)
R53	1-208-863-81	s RES, CHIP 100 (1005)
R54	1-208-863-81	s RES, CHIP 100 (1005)

(DR-617 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R55	1-208-855-81	s RES, CHIP 47 (1005)
R56	1-208-855-81	s RES, CHIP 47 (1005)
R58	1-208-859-81	s RES, CHIP 68 (1005)
R59	1-208-859-81	s RES, CHIP 68 (1005)
R60	1-208-859-81	s RES, CHIP 68 (1005)
R61	1-208-859-81	s RES, CHIP 68 (1005)
R62	1-208-859-81	s RES, CHIP 68 (1005)
R63	1-208-859-81	s RES, CHIP 68 (1005)
R64	1-220-878-81	s RES, CHIP 22 (1005)
R65	1-208-859-81	s RES, CHIP 68 (1005)
R66	1-208-859-81	s RES, CHIP 68 (1005)
R67	1-208-859-81	s RES, CHIP 68 (1005)
R68	1-220-878-81	s RES, CHIP 22 (1005)
R70	1-208-855-81	s RES, CHIP 47 (1005)
R71	1-208-855-81	s RES, CHIP 47 (1005)
R72	1-208-855-81	s RES, CHIP 47 (1005)
R73	1-208-855-81	s RES, CHIP 47 (1005)
R75	1-208-855-81	s RES, CHIP 47 (1005)
R77	1-208-855-81	s RES, CHIP 47 (1005)
R78	1-208-855-81	s RES, CHIP 47 (1005)
R79	1-208-855-81	s RES, CHIP 47 (1005)
R80	1-208-855-81	s RES, CHIP 47 (1005)
R82	1-208-855-81	s RES, CHIP 47 (1005)
R83	1-208-855-81	s RES, CHIP 47 (1005)
R84	1-208-855-81	s RES, CHIP 47 (1005)
R85	1-208-935-81	s RES, CHIP 100K (1005)
R86	1-208-935-81	s RES, CHIP 100K (1005)
R88	1-208-855-81	s RES, CHIP 47 (1005)
R89	1-208-855-81	s RES, CHIP 47 (1005)
R90	1-208-855-81	s RES, CHIP 47 (1005)
R91	1-208-855-81	s RES, CHIP 47 (1005)
R93	1-208-855-81	s RES, CHIP 47 (1005)
R94	1-208-871-81	s RES, CHIP 220 (1005)
R95	1-220-870-81	s RES, CHIP 10 (1005)
R96	1-208-855-81	s RES, CHIP 47 (1005)
R97	1-208-855-81	s RES, CHIP 47 (1005)
R98	1-208-855-81	s RES, CHIP 47 (1005)
R99	1-220-878-81	s RES, CHIP 22 (1005)
R100	1-220-878-81	s RES, CHIP 22 (1005)
R102	1-211-969-91	s RES, CHIP 10 (1608)
R103	1-211-969-91	s RES, CHIP 10 (1608)
R104	1-211-969-91	s RES, CHIP 10 (1608)
R105	1-211-969-91	s RES, CHIP 10 (1608)
R106	1-208-911-81	s RES, CHIP 10K (1005)
RB1	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB2	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB3	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB4	1-234-381-21	s RES, NETWORK 100K (1005X4)

DVP-45 BOARD (suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-884-A	s MOUNTED CIRCUIT BOARD, DVP-45
3pcs	3-855-938-01	s SCREW
C1	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C2	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C3	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C4	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C5	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C18	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C28	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C29	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C30	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C33	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C34	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C35	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C36	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C37	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C38	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C39	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C40	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C41	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C42	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C43	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C44	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C45	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C47	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C48	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C49	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C51	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C52	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C53	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C54	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C55	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C56	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C58	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C59	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C60	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C62	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C543	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C546	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C549	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C556	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C561	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C570	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1249	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1250	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1252	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1253	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1254	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1447	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C1448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1449	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1450	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1452	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C1453	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C1454	1-112-692-81	s	CAP, CHIP CERAMIC1000PF CH 1005
C1455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1458	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1702	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
C1960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1972	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2100	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2101	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2104	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2122	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2128	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2133	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2134	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2138	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
C2142	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2300	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C2402	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2403	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2409	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2413	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2414	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2415	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C2416	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2427	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C2429	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN900	1-784-086-21	o PIN, CONNECTOR (PC BOARD) 15P
CN1700	1-778-451-31	s CONNECTOR, FFC/FPC(ZIF) AN 50P
CN1701	1-580-057-21	s PIN, CONNECTOR (SMD) 4P
CN2100	1-764-093-21	o PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-024-71	s DIODE 1SS362-TE85L
D101	8-719-024-71	s DIODE 1SS362-TE85L
D102	8-719-024-71	s DIODE 1SS362-TE85L
D103	8-719-024-71	s DIODE 1SS362-TE85L
D104	8-719-024-71	s DIODE 1SS362-TE85L
D105	8-719-024-71	s DIODE 1SS362-TE85L
D106	8-719-024-71	s DIODE 1SS362-TE85L
D900	8-719-074-31	s DIODE CL-196YG-CD-T
D901	8-719-074-31	s DIODE CL-196YG-CD-T
D902	8-719-074-31	s DIODE CL-196YG-CD-T
D1700	6-501-052-02	s DIODE CL-197HB1-D-T
D2000	8-719-077-09	s DIODE CL-196HR-CD-T
D2001	8-719-077-09	s DIODE CL-196HR-CD-T
D2002	8-719-077-09	s DIODE CL-196HR-CD-T
D2003	8-719-077-09	s DIODE CL-196HR-CD-T
D2004	8-719-074-31	s DIODE CL-196YG-CD-T
D2005	8-719-074-31	s DIODE CL-196YG-CD-T
D2006	8-719-074-31	s DIODE CL-196YG-CD-T
D2007	8-719-074-31	s DIODE CL-196YG-CD-T
E1	1-535-877-22	s CHIP, CHECKER
E2	1-535-877-22	s CHIP, CHECKER
E3	1-535-877-22	s CHIP, CHECKER
E4	1-535-877-22	s CHIP, CHECKER

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
E5	1-535-877-22	s CHIP, CHECKER
E6	1-535-877-22	s CHIP, CHECKER
E7	1-535-877-22	s CHIP, CHECKER
E8	1-535-877-22	s CHIP, CHECKER
FB1	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB2	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB3	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB4	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB5	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB6	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB7	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB8	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB9	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB10	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB11	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB12	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB13	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB14	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB300	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB301	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB302	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB303	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB600	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB601	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB602	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB603	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB604	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB605	1-416-976-21	s FERRITE, EMI (SMD) (3216)
FB700	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB701	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB800	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB801	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB900	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB901	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1000	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1001	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1002	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1004	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1005	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1006	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1007	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1200	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1201	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1202	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1204	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1205	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1206	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1207	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1400	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1401	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1402	1-400-834-21	s FERRITE, EMI (SMD) (1005)
FB1403	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1700	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1900	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2100	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB2101	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2102	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2400	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2401	1-400-462-21	s FERRITE, EMI (SMD) (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
FB2403	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2404	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2405	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2406	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2407	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2408	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2409	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2410	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2411	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2413	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB2414	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
IC1	6-706-220-01	s	IC LTC3411EMS#TR
IC2	6-706-220-01	s	IC LTC3411EMS#TR
IC3	6-703-721-01	s	IC TPS54310PWPR
IC4	6-703-721-01	s	IC TPS54310PWPR
IC5	6-707-373-01	s	IC TPS51100DGQR
IC6	6-707-373-01	s	IC TPS51100DGQR
IC8	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC9	6-706-220-01	s	IC LTC3411EMS#TR
IC100	8-759-278-58	s	IC NJM4558V-TE2
IC101	8-759-338-95	s	IC NJM2903V(Te2)
IC102	8-759-646-99	s	IC NJM4556AV(Te2)
IC105	8-759-655-22	s	IC TC7WH34FK(Te85R)
IC201	8-759-592-49	s	IC TC7SZ125FU(Te85R)
IC401	8-759-573-97	s	IC SN74LVC541APWR
IC402	8-759-592-49	s	IC TC7SZ125FU(Te85R)
IC403	8-759-592-49	s	IC TC7SZ125FU(Te85R)
IC600	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC601	6-704-643-01	s	IC R3112N221A-TR-FA
IC602	6-706-484-01	s	IC TC7SH04FU(T5RSOYJF)
IC603	6-700-599-01	s	IC TC7SA08FU(Te85R)
IC604	6-700-599-01	s	IC TC7SA08FU(Te85R)
IC700	6-704-659-01	s	IC AD1896AYRSZRL
IC701	6-709-647-01	s	IC TLC2932AIPWR
IC702	6-709-647-01	s	IC TLC2932AIPWR
IC703	6-704-659-01	s	IC AD1896AYRSZRL
IC902	8-759-655-22	s	IC TC7WH34FK(Te85R)
IC903	8-759-573-97	s	IC SN74LVC541APWR
IC1000	8-753-276-37	o	IC CXD3195AGG-T6
IC1200	8-753-276-37	o	IC CXD3195AGG-T6
IC1400	8-753-276-37	o	IC CXD3195AGG-T6
IC1700	8-759-655-22	s	IC TC7WH34FK(Te85R)
IC1701	8-759-392-81	s	IC SN74LVC16245ADGGR
IC1702	8-759-392-81	s	IC SN74LVC16245ADGGR
IC2102	8-759-592-49	s	IC TC7SZ125FU(Te85R)
IC2401	6-708-277-01	s	IC CDCVF25081PWR
IC2402	6-708-277-01	s	IC CDCVF25081PWR
IC2403	6-712-342-01	s	IC CDCVF2310PWR
IC2405	8-759-691-77	s	IC TC74VCX541FT(EL)
IC2406	6-700-599-01	s	IC TC7SA08FU(Te85R)
IC2408	8-759-573-97	s	IC SN74LVC541APWR
IC2409	6-700-599-01	s	IC TC7SA08FU(Te85R)
IC2410	8-759-655-22	s	IC TC7WH34FK(Te85R)
IC2411	6-708-277-01	s	IC CDCVF25081PWR
IC2412	8-759-691-77	s	IC TC74VCX541FT(EL)
IC2413	6-703-875-01	s	IC CDCVF2505PWR
IC2414	6-700-599-01	s	IC TC7SA08FU(Te85R)
IC2415	6-700-599-01	s	IC TC7SA08FU(Te85R)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC2416	8-759-655-22	s	IC TC7WH34FK(Te85R)
IC2417	6-700-599-01	s	IC TC7SA08FU(Te85R)
L1	1-400-870-21	s	COIL, CHOKE 2.2UH
L2	1-400-870-21	s	COIL, CHOKE 2.2UH
L3	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L4	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L7	1-400-870-21	s	COIL, CHOKE 2.2UH
Q1	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q2	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q3	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q4	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q5	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q600	8-729-928-82	s	TRANSISTOR DTC144EE-TL
R1	1-208-919-81	s	RES, CHIP 22K (1005)
R2	1-208-935-81	s	RES, CHIP 100K (1005)
R3	1-208-935-81	s	RES, CHIP 100K (1005)
R4	1-208-919-81	s	RES, CHIP 22K (1005)
R5	1-208-935-81	s	RES, CHIP 100K (1005)
R6	1-208-935-81	s	RES, CHIP 100K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-935-81	s	RES, CHIP 100K (1005)
R11	1-208-899-81	s	RES, CHIP 3.3K (1005)
R12	1-208-911-81	s	RES, CHIP 10K (1005)
R19	1-208-879-81	s	RES, CHIP 470 (1005)
R20	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R21	1-208-895-81	s	RES, CHIP 2.2K (1005)
R22	1-208-879-81	s	RES, CHIP 470 (1005)
R23	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R24	1-208-895-81	s	RES, CHIP 2.2K (1005)
R26	1-208-935-81	s	RES, CHIP 100K (1005)
R28	1-208-927-81	s	RES, CHIP 47K (1005)
R29	1-208-903-81	s	RES, CHIP 4.7K (1005)
R30	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R31	1-208-899-81	s	RES, CHIP 3.3K (1005)
R32	1-208-911-81	s	RES, CHIP 10K (1005)
R33	1-208-903-81	s	RES, CHIP 4.7K (1005)
R34	1-208-899-81	s	RES, CHIP 3.3K (1005)
R35	1-208-927-81	s	RES, CHIP 47K (1005)
R36	1-208-911-81	s	RES, CHIP 10K (1005)
R43	1-208-911-81	s	RES, CHIP 10K (1005)
R44	1-208-947-81	s	RES, CHIP 330K (1005)
R45	1-208-911-81	s	RES, CHIP 10K (1005)
R46	1-208-947-81	s	RES, CHIP 330K (1005)
R47	1-208-935-81	s	RES, CHIP 100K (1005)
R48	1-208-927-81	s	RES, CHIP 47K (1005)
R49	1-208-947-81	s	RES, CHIP 330K (1005)
R50	1-208-911-81	s	RES, CHIP 10K (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-208-855-81	s	RES, CHIP 47 (1005)
R102	1-208-911-81	s	RES, CHIP 10K (1005)
R103	1-208-911-81	s	RES, CHIP 10K (1005)
R104	1-208-855-81	s	RES, CHIP 47 (1005)
R106	1-208-911-81	s	RES, CHIP 10K (1005)
R107	1-208-911-81	s	RES, CHIP 10K (1005)
R108	1-208-903-81	s	RES, CHIP 4.7K (1005)
R109	1-208-899-81	s	RES, CHIP 3.3K (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R111	1-208-927-81	s RES, CHIP 47K (1005)
R112	1-208-927-81	s RES, CHIP 47K (1005)
R113	1-208-959-81	s RES, CHIP 1M (1005)
R114	1-208-879-81	s RES, CHIP 470 (1005)
R115	1-208-879-81	s RES, CHIP 470 (1005)
R116	1-208-903-81	s RES, CHIP 4.7K (1005)
R117	1-208-887-81	s RES, CHIP 1.0K (1005)
R118	1-208-895-81	s RES, CHIP 2.2K (1005)
R119	1-208-895-81	s RES, CHIP 2.2K (1005)
R120	1-208-935-81	s RES, CHIP 100K (1005)
R121	1-208-855-81	s RES, CHIP 47 (1005)
R122	1-208-879-81	s RES, CHIP 470 (1005)
R123	1-208-895-81	s RES, CHIP 2.2K (1005)
R124	1-208-907-81	s RES, CHIP 6.8K (1005)
R125	1-208-935-81	s RES, CHIP 100K (1005)
R126	1-208-903-81	s RES, CHIP 4.7K (1005)
R127	1-208-860-81	s RES, CHIP 75 (1005)
R128	1-208-927-81	s RES, CHIP 47K (1005)
R129	1-208-935-81	s RES, CHIP 100K (1005)
R130	1-208-899-81	s RES, CHIP 3.3K (1005)
R131	1-208-895-81	s RES, CHIP 2.2K (1005)
R132	1-220-878-81	s RES, CHIP 22 (1005)
R133	1-220-878-81	s RES, CHIP 22 (1005)
R134	1-220-878-81	s RES, CHIP 22 (1005)
R135	1-220-878-81	s RES, CHIP 22 (1005)
R136	1-208-943-81	s RES, CHIP 220K (1005)
R137	1-208-943-81	s RES, CHIP 220K (1005)
R138	1-220-878-81	s RES, CHIP 22 (1005)
R139	1-220-878-81	s RES, CHIP 22 (1005)
R140	1-220-878-81	s RES, CHIP 22 (1005)
R141	1-220-878-81	s RES, CHIP 22 (1005)
R142	1-220-878-81	s RES, CHIP 22 (1005)
R200	1-220-878-81	s RES, CHIP 22 (1005)
R204	1-220-878-81	s RES, CHIP 22 (1005)
R205	1-220-878-81	s RES, CHIP 22 (1005)
R206	1-220-878-81	s RES, CHIP 22 (1005)
R207	1-220-878-81	s RES, CHIP 22 (1005)
R208	1-220-878-81	s RES, CHIP 22 (1005)
R209	1-208-855-81	s RES, CHIP 47 (1005)
R210	1-208-855-81	s RES, CHIP 47 (1005)
R211	1-218-990-81	s CONDUCTOR, CHIP (1005)
R212	1-218-990-81	s CONDUCTOR, CHIP (1005)
R213	1-218-990-81	s CONDUCTOR, CHIP (1005)
R214	1-218-990-81	s CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s CONDUCTOR, CHIP (1005)
R219	1-218-990-81	s CONDUCTOR, CHIP (1005)
R220	1-208-855-81	s RES, CHIP 47 (1005)
R221	1-220-878-81	s RES, CHIP 22 (1005)
R222	1-220-878-81	s RES, CHIP 22 (1005)
R223	1-220-878-81	s RES, CHIP 22 (1005)
R225	1-218-990-81	s CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s CONDUCTOR, CHIP (1005)
R227	1-208-875-81	s RES, CHIP 330 (1005)
R228	1-208-903-81	s RES, CHIP 4.7K (1005)
R229	1-218-990-81	s CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s CONDUCTOR, CHIP (1005)
R232	1-208-857-81	s RES, CHIP 56 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R233	1-208-857-81	s RES, CHIP 56 (1005)
R234	1-208-903-81	s RES, CHIP 4.7K (1005)
R237	1-218-990-81	s CONDUCTOR, CHIP (1005)
R238	1-220-878-81	s RES, CHIP 22 (1005)
R239	1-220-878-81	s RES, CHIP 22 (1005)
R240	1-218-990-81	s CONDUCTOR, CHIP (1005)
R241	1-218-990-81	s CONDUCTOR, CHIP (1005)
R242	1-208-887-81	s RES, CHIP 1.0K (1005)
R250	1-220-878-81	s RES, CHIP 22 (1005)
R251	1-220-878-81	s RES, CHIP 22 (1005)
R252	1-220-878-81	s RES, CHIP 22 (1005)
R253	1-220-878-81	s RES, CHIP 22 (1005)
R254	1-220-878-81	s RES, CHIP 22 (1005)
R255	1-220-878-81	s RES, CHIP 22 (1005)
R256	1-220-878-81	s RES, CHIP 22 (1005)
R257	1-220-878-81	s RES, CHIP 22 (1005)
R262	1-208-911-81	s RES, CHIP 10K (1005)
R263	1-208-911-81	s RES, CHIP 10K (1005)
R264	1-208-911-81	s RES, CHIP 10K (1005)
R265	1-208-911-81	s RES, CHIP 10K (1005)
R266	1-208-911-81	s RES, CHIP 10K (1005)
R267	1-208-911-81	s RES, CHIP 10K (1005)
R268	1-208-911-81	s RES, CHIP 10K (1005)
R269	1-208-911-81	s RES, CHIP 10K (1005)
R270	1-220-878-81	s RES, CHIP 22 (1005)
R271	1-220-878-81	s RES, CHIP 22 (1005)
R272	1-220-878-81	s RES, CHIP 22 (1005)
R273	1-208-911-81	s RES, CHIP 10K (1005)
R274	1-208-911-81	s RES, CHIP 10K (1005)
R300	1-208-856-81	s RES, CHIP 51 (1005)
R301	1-208-856-81	s RES, CHIP 51 (1005)
R302	1-208-856-81	s RES, CHIP 51 (1005)
R303	1-208-856-81	s RES, CHIP 51 (1005)
R304	1-208-856-81	s RES, CHIP 51 (1005)
R305	1-208-856-81	s RES, CHIP 51 (1005)
R306	1-208-856-81	s RES, CHIP 51 (1005)
R307	1-208-856-81	s RES, CHIP 51 (1005)
R308	1-208-856-81	s RES, CHIP 51 (1005)
R309	1-208-856-81	s RES, CHIP 51 (1005)
R310	1-208-856-81	s RES, CHIP 51 (1005)
R311	1-208-856-81	s RES, CHIP 51 (1005)
R312	1-208-856-81	s RES, CHIP 51 (1005)
R313	1-208-856-81	s RES, CHIP 51 (1005)
R314	1-208-856-81	s RES, CHIP 51 (1005)
R315	1-208-856-81	s RES, CHIP 51 (1005)
R316	1-208-856-81	s RES, CHIP 51 (1005)
R317	1-208-856-81	s RES, CHIP 51 (1005)
R318	1-208-856-81	s RES, CHIP 51 (1005)
R319	1-208-856-81	s RES, CHIP 51 (1005)
R320	1-208-856-81	s RES, CHIP 51 (1005)
R321	1-208-863-81	s RES, CHIP 100 (1005)
R322	1-208-863-81	s RES, CHIP 100 (1005)
R334	1-220-878-81	s RES, CHIP 22 (1005)
R335	1-220-878-81	s RES, CHIP 22 (1005)
R336	1-220-878-81	s RES, CHIP 22 (1005)
R337	1-220-878-81	s RES, CHIP 22 (1005)
R338	1-220-878-81	s RES, CHIP 22 (1005)
R339	1-220-878-81	s RES, CHIP 22 (1005)
R340	1-220-878-81	s RES, CHIP 22 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
R400	1-220-878-81	s	RES, CHIP 22 (1005)
R401	1-220-878-81	s	RES, CHIP 22 (1005)
R402	1-220-878-81	s	RES, CHIP 22 (1005)
R403	1-220-878-81	s	RES, CHIP 22 (1005)
R404	1-208-870-81	s	RES, CHIP 200 (1005)
R405	1-220-878-81	s	RES, CHIP 22 (1005)
R406	1-220-878-81	s	RES, CHIP 22 (1005)
R407	1-220-878-81	s	RES, CHIP 22 (1005)
R408	1-220-878-81	s	RES, CHIP 22 (1005)
R409	1-220-878-81	s	RES, CHIP 22 (1005)
R410	1-220-878-81	s	RES, CHIP 22 (1005)
R411	1-220-878-81	s	RES, CHIP 22 (1005)
R412	1-220-878-81	s	RES, CHIP 22 (1005)
R413	1-220-878-81	s	RES, CHIP 22 (1005)
R414	1-220-878-81	s	RES, CHIP 22 (1005)
R415	1-220-878-81	s	RES, CHIP 22 (1005)
R416	1-220-878-81	s	RES, CHIP 22 (1005)
R417	1-220-878-81	s	RES, CHIP 22 (1005)
R418	1-220-878-81	s	RES, CHIP 22 (1005)
R419	1-220-878-81	s	RES, CHIP 22 (1005)
R420	1-220-878-81	s	RES, CHIP 22 (1005)
R421	1-220-878-81	s	RES, CHIP 22 (1005)
R422	1-220-878-81	s	RES, CHIP 22 (1005)
R423	1-220-878-81	s	RES, CHIP 22 (1005)
R424	1-220-878-81	s	RES, CHIP 22 (1005)
R425	1-220-878-81	s	RES, CHIP 22 (1005)
R426	1-220-878-81	s	RES, CHIP 22 (1005)
R427	1-220-878-81	s	RES, CHIP 22 (1005)
R428	1-220-878-81	s	RES, CHIP 22 (1005)
R429	1-220-878-81	s	RES, CHIP 22 (1005)
R430	1-220-878-81	s	RES, CHIP 22 (1005)
R431	1-220-878-81	s	RES, CHIP 22 (1005)
R432	1-220-878-81	s	RES, CHIP 22 (1005)
R433	1-220-878-81	s	RES, CHIP 22 (1005)
R434	1-220-878-81	s	RES, CHIP 22 (1005)
R435	1-220-878-81	s	RES, CHIP 22 (1005)
R436	1-220-878-81	s	RES, CHIP 22 (1005)
R437	1-220-878-81	s	RES, CHIP 22 (1005)
R438	1-220-878-81	s	RES, CHIP 22 (1005)
R439	1-220-878-81	s	RES, CHIP 22 (1005)
R440	1-220-878-81	s	RES, CHIP 22 (1005)
R441	1-220-878-81	s	RES, CHIP 22 (1005)
R442	1-220-878-81	s	RES, CHIP 22 (1005)
R443	1-220-878-81	s	RES, CHIP 22 (1005)
R444	1-220-878-81	s	RES, CHIP 22 (1005)
R445	1-220-878-81	s	RES, CHIP 22 (1005)
R446	1-220-878-81	s	RES, CHIP 22 (1005)
R447	1-220-878-81	s	RES, CHIP 22 (1005)
R448	1-220-878-81	s	RES, CHIP 22 (1005)
R449	1-220-878-81	s	RES, CHIP 22 (1005)
R450	1-220-878-81	s	RES, CHIP 22 (1005)
R451	1-208-870-81	s	RES, CHIP 200 (1005)
R452	1-220-878-81	s	RES, CHIP 22 (1005)
R453	1-220-878-81	s	RES, CHIP 22 (1005)
R454	1-220-878-81	s	RES, CHIP 22 (1005)
R455	1-220-878-81	s	RES, CHIP 22 (1005)
R456	1-220-878-81	s	RES, CHIP 22 (1005)
R457	1-220-878-81	s	RES, CHIP 22 (1005)
R458	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R459	1-220-878-81	s RES, CHIP 22 (1005)
R460	1-220-878-81	s RES, CHIP 22 (1005)
R461	1-220-878-81	s RES, CHIP 22 (1005)
R462	1-220-878-81	s RES, CHIP 22 (1005)
R463	1-220-878-81	s RES, CHIP 22 (1005)
R464	1-220-878-81	s RES, CHIP 22 (1005)
R465	1-220-878-81	s RES, CHIP 22 (1005)
R466	1-220-878-81	s RES, CHIP 22 (1005)
R467	1-220-878-81	s RES, CHIP 22 (1005)
R468	1-220-878-81	s RES, CHIP 22 (1005)
R469	1-220-878-81	s RES, CHIP 22 (1005)
R470	1-220-878-81	s RES, CHIP 22 (1005)
R471	1-220-878-81	s RES, CHIP 22 (1005)
R472	1-220-878-81	s RES, CHIP 22 (1005)
R473	1-220-878-81	s RES, CHIP 22 (1005)
R474	1-220-878-81	s RES, CHIP 22 (1005)
R475	1-220-878-81	s RES, CHIP 22 (1005)
R476	1-208-870-81	s RES, CHIP 200 (1005)
R477	1-220-878-81	s RES, CHIP 22 (1005)
R478	1-208-856-81	s RES, CHIP 51 (1005)
R479	1-208-856-81	s RES, CHIP 51 (1005)
R480	1-208-856-81	s RES, CHIP 51 (1005)
R481	1-208-856-81	s RES, CHIP 51 (1005)
R482	1-208-856-81	s RES, CHIP 51 (1005)
R483	1-208-856-81	s RES, CHIP 51 (1005)
R484	1-208-856-81	s RES, CHIP 51 (1005)
R485	1-208-856-81	s RES, CHIP 51 (1005)
R486	1-208-856-81	s RES, CHIP 51 (1005)
R487	1-208-856-81	s RES, CHIP 51 (1005)
R488	1-208-856-81	s RES, CHIP 51 (1005)
R489	1-208-856-81	s RES, CHIP 51 (1005)
R490	1-208-856-81	s RES, CHIP 51 (1005)
R491	1-208-856-81	s RES, CHIP 51 (1005)
R492	1-208-856-81	s RES, CHIP 51 (1005)
R493	1-208-856-81	s RES, CHIP 51 (1005)
R494	1-208-856-81	s RES, CHIP 51 (1005)
R495	1-208-856-81	s RES, CHIP 51 (1005)
R496	1-208-856-81	s RES, CHIP 51 (1005)
R497	1-208-856-81	s RES, CHIP 51 (1005)
R498	1-208-856-81	s RES, CHIP 51 (1005)
R499	1-208-863-81	s RES, CHIP 100 (1005)
R500	1-208-863-81	s RES, CHIP 100 (1005)
R600	1-208-903-81	s RES, CHIP 4.7K (1005)
R601	1-208-903-81	s RES, CHIP 4.7K (1005)
R602	1-208-903-81	s RES, CHIP 4.7K (1005)
R608	1-220-878-81	s RES, CHIP 22 (1005)
R609	1-208-911-81	s RES, CHIP 10K (1005)
R610	1-220-878-81	s RES, CHIP 22 (1005)
R611	1-208-887-81	s RES, CHIP 1.0K (1005)
R700	1-218-990-81	s CONDUCTOR, CHIP (1005)
R701	1-208-899-81	s RES, CHIP 3.3K (1005)
R703	1-208-899-81	s RES, CHIP 3.3K (1005)
R705	1-208-915-81	s RES, CHIP 15K (1005)
R706	1-208-895-81	s RES, CHIP 2.2K (1005)
R707	1-208-871-81	s RES, CHIP 220 (1005)
R708	1-208-915-81	s RES, CHIP 15K (1005)
R709	1-208-895-81	s RES, CHIP 2.2K (1005)
R710	1-208-871-81	s RES, CHIP 220 (1005)
R711	1-208-855-81	s RES, CHIP 47 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R712	1-208-855-81	s RES, CHIP 47 (1005)
R713	1-218-990-81	s CONDUCTOR, CHIP (1005)
R718	1-218-990-81	s CONDUCTOR, CHIP (1005)
R719	1-218-990-81	s CONDUCTOR, CHIP (1005)
R720	1-218-990-81	s CONDUCTOR, CHIP (1005)
R722	1-218-990-81	s CONDUCTOR, CHIP (1005)
R801	1-218-990-81	s CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s CONDUCTOR, CHIP (1005)
R803	1-208-927-81	s RES, CHIP 47K (1005)
R804	1-218-990-81	s CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s CONDUCTOR, CHIP (1005)
R809	1-208-927-81	s RES, CHIP 47K (1005)
R810	1-208-927-81	s RES, CHIP 47K (1005)
R812	1-218-990-81	s CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s CONDUCTOR, CHIP (1005)
R814	1-208-927-81	s RES, CHIP 47K (1005)
R815	1-218-990-81	s CONDUCTOR, CHIP (1005)
R816	1-218-990-81	s CONDUCTOR, CHIP (1005)
R817	1-218-990-81	s CONDUCTOR, CHIP (1005)
R818	1-218-990-81	s CONDUCTOR, CHIP (1005)
R819	1-218-990-81	s CONDUCTOR, CHIP (1005)
R820	1-208-927-81	s RES, CHIP 47K (1005)
R821	1-208-927-81	s RES, CHIP 47K (1005)
R901	1-218-990-81	s CONDUCTOR, CHIP (1005)
R902	1-218-990-81	s CONDUCTOR, CHIP (1005)
R903	1-208-927-81	s RES, CHIP 47K (1005)
R904	1-208-927-81	s RES, CHIP 47K (1005)
R905	1-208-927-81	s RES, CHIP 47K (1005)
R906	1-208-927-81	s RES, CHIP 47K (1005)
R907	1-218-990-81	s CONDUCTOR, CHIP (1005)
R908	1-208-927-81	s RES, CHIP 47K (1005)
R909	1-208-927-81	s RES, CHIP 47K (1005)
R910	1-218-990-81	s CONDUCTOR, CHIP (1005)
R911	1-208-903-81	s RES, CHIP 4.7K (1005)
R912	1-208-903-81	s RES, CHIP 4.7K (1005)
R913	1-218-990-81	s CONDUCTOR, CHIP (1005)
R914	1-218-990-81	s CONDUCTOR, CHIP (1005)
R915	1-208-855-81	s RES, CHIP 47 (1005)
R916	1-208-855-81	s RES, CHIP 47 (1005)
R917	1-208-855-81	s RES, CHIP 47 (1005)
R921	1-208-903-81	s RES, CHIP 4.7K (1005)
R922	1-208-875-81	s RES, CHIP 330 (1005)
R1000	1-220-878-81	s RES, CHIP 22 (1005)
R1005	1-220-878-81	s RES, CHIP 22 (1005)
R1006	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1007	1-208-911-81	s RES, CHIP 10K (1005)
R1008	1-220-882-81	s RES, CHIP 33 (1005)
R1009	1-220-878-81	s RES, CHIP 22 (1005)
R1011	1-208-935-81	s RES, CHIP 100K (1005)
R1013	1-208-911-81	s RES, CHIP 10K (1005)
R1014	1-208-911-81	s RES, CHIP 10K (1005)
R1015	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1016	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1017	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1018	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1019	1-208-911-81	s RES, CHIP 10K (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R1020	1-220-878-81	s RES, CHIP 22 (1005)
R1022	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1023	1-220-878-81	s RES, CHIP 22 (1005)
R1025	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1026	1-220-878-81	s RES, CHIP 22 (1005)
R1205	1-220-882-81	s RES, CHIP 33 (1005)
R1206	1-220-882-81	s RES, CHIP 33 (1005)
R1207	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1208	1-220-878-81	s RES, CHIP 22 (1005)
R1209	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1210	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1213	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1214	1-208-911-81	s RES, CHIP 10K (1005)
R1216	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1217	1-220-878-81	s RES, CHIP 22 (1005)
R1219	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1220	1-220-878-81	s RES, CHIP 22 (1005)
R1221	1-220-878-81	s RES, CHIP 22 (1005)
R1400	1-220-878-81	s RES, CHIP 22 (1005)
R1405	1-220-882-81	s RES, CHIP 33 (1005)
R1406	1-220-882-81	s RES, CHIP 33 (1005)
R1407	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1410	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1411	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1412	1-220-878-81	s RES, CHIP 22 (1005)
R1413	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1414	1-208-911-81	s RES, CHIP 10K (1005)
R1416	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1417	1-220-878-81	s RES, CHIP 22 (1005)
R1419	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1420	1-220-878-81	s RES, CHIP 22 (1005)
R1607	1-208-943-81	s RES, CHIP 220K (1005)
R1611	1-208-943-81	s RES, CHIP 220K (1005)
R1612	1-208-943-81	s RES, CHIP 220K (1005)
R1613	1-208-943-81	s RES, CHIP 220K (1005)
R1614	1-208-943-81	s RES, CHIP 220K (1005)
R1700	1-208-879-81	s RES, CHIP 470 (1005)
R1703	1-208-911-81	s RES, CHIP 10K (1005)
R1704	1-220-878-81	s RES, CHIP 22 (1005)
R1705	1-220-878-81	s RES, CHIP 22 (1005)
R1706	1-208-871-81	s RES, CHIP 220 (1005)
R1707	1-208-911-81	s RES, CHIP 10K (1005)
R1708	1-220-882-81	s RES, CHIP 33 (1005)
R1709	1-208-855-81	s RES, CHIP 47 (1005)
R1710	1-208-911-81	s RES, CHIP 10K (1005)
R1711	1-208-911-81	s RES, CHIP 10K (1005)
R1712	1-208-911-81	s RES, CHIP 10K (1005)
R1713	1-208-903-81	s RES, CHIP 4.7K (1005)
R1716	1-208-861-81	s RES, CHIP 82 (1005)
R1717	1-208-861-81	s RES, CHIP 82 (1005)
R1718	1-208-861-81	s RES, CHIP 82 (1005)
R1719	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1720	1-208-911-81	s RES, CHIP 10K (1005)
R1721	1-208-911-81	s RES, CHIP 10K (1005)
R1722	1-208-905-81	s RES, CHIP 5.6K (1005)
R1723	1-208-911-81	s RES, CHIP 10K (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R1724	1-220-878-81	s RES, CHIP 22 (1005)
R1725	1-208-863-81	s RES, CHIP 100 (1005)
R1731	1-208-911-81	s RES, CHIP 10K (1005)
R1732	1-208-911-81	s RES, CHIP 10K (1005)
R1733	1-220-870-81	s RES, CHIP 10 (1005)
R1734	1-220-878-81	s RES, CHIP 22 (1005)
R1735	1-208-911-81	s RES, CHIP 10K (1005)
R1736	1-208-911-81	s RES, CHIP 10K (1005)
R1737	1-208-911-81	s RES, CHIP 10K (1005)
R1738	1-220-878-81	s RES, CHIP 22 (1005)
R1739	1-220-878-81	s RES, CHIP 22 (1005)
R1740	1-208-856-81	s RES, CHIP 51 (1005)
R1741	1-208-856-81	s RES, CHIP 51 (1005)
R1742	1-208-856-81	s RES, CHIP 51 (1005)
R1743	1-208-856-81	s RES, CHIP 51 (1005)
R1744	1-208-856-81	s RES, CHIP 51 (1005)
R1745	1-208-856-81	s RES, CHIP 51 (1005)
R1746	1-208-856-81	s RES, CHIP 51 (1005)
R1747	1-208-856-81	s RES, CHIP 51 (1005)
R1748	1-208-856-81	s RES, CHIP 51 (1005)
R1749	1-208-856-81	s RES, CHIP 51 (1005)
R1750	1-208-856-81	s RES, CHIP 51 (1005)
R1751	1-208-856-81	s RES, CHIP 51 (1005)
R1752	1-208-856-81	s RES, CHIP 51 (1005)
R1753	1-208-856-81	s RES, CHIP 51 (1005)
R1754	1-208-856-81	s RES, CHIP 51 (1005)
R1755	1-208-856-81	s RES, CHIP 51 (1005)
R1756	1-208-856-81	s RES, CHIP 51 (1005)
R1757	1-208-856-81	s RES, CHIP 51 (1005)
R1758	1-208-856-81	s RES, CHIP 51 (1005)
R1759	1-208-856-81	s RES, CHIP 51 (1005)
R1760	1-208-856-81	s RES, CHIP 51 (1005)
R1761	1-208-856-81	s RES, CHIP 51 (1005)
R1762	1-208-856-81	s RES, CHIP 51 (1005)
R1763	1-208-856-81	s RES, CHIP 51 (1005)
R1764	1-208-856-81	s RES, CHIP 51 (1005)
R1765	1-208-856-81	s RES, CHIP 51 (1005)
R1766	1-208-856-81	s RES, CHIP 51 (1005)
R1767	1-208-856-81	s RES, CHIP 51 (1005)
R1768	1-208-856-81	s RES, CHIP 51 (1005)
R1769	1-208-856-81	s RES, CHIP 51 (1005)
R1770	1-208-856-81	s RES, CHIP 51 (1005)
R1771	1-208-856-81	s RES, CHIP 51 (1005)
R1772	1-208-856-81	s RES, CHIP 51 (1005)
R1773	1-208-856-81	s RES, CHIP 51 (1005)
R1774	1-208-856-81	s RES, CHIP 51 (1005)
R1775	1-208-856-81	s RES, CHIP 51 (1005)
R1776	1-208-856-81	s RES, CHIP 51 (1005)
R1777	1-208-856-81	s RES, CHIP 51 (1005)
R1778	1-208-856-81	s RES, CHIP 51 (1005)
R1779	1-208-856-81	s RES, CHIP 51 (1005)
R1780	1-208-856-81	s RES, CHIP 51 (1005)
R1781	1-208-856-81	s RES, CHIP 51 (1005)
R1782	1-208-856-81	s RES, CHIP 51 (1005)
R1783	1-208-856-81	s RES, CHIP 51 (1005)
R1784	1-208-856-81	s RES, CHIP 51 (1005)
R1785	1-208-856-81	s RES, CHIP 51 (1005)
R1786	1-208-856-81	s RES, CHIP 51 (1005)
R1787	1-208-856-81	s RES, CHIP 51 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1847	1-208-856-81	s	RES, CHIP 51 (1005)
R1848	1-208-856-81	s	RES, CHIP 51 (1005)
R1849	1-208-856-81	s	RES, CHIP 51 (1005)
R1850	1-208-856-81	s	RES, CHIP 51 (1005)
R1851	1-208-856-81	s	RES, CHIP 51 (1005)
R1852	1-208-856-81	s	RES, CHIP 51 (1005)
R1853	1-208-856-81	s	RES, CHIP 51 (1005)
R1854	1-208-856-81	s	RES, CHIP 51 (1005)
R1855	1-208-863-81	s	RES, CHIP 100 (1005)
R1856	1-208-855-81	s	RES, CHIP 47 (1005)
R1857	1-208-855-81	s	RES, CHIP 47 (1005)
R1858	1-220-878-81	s	RES, CHIP 22 (1005)
R1859	1-220-878-81	s	RES, CHIP 22 (1005)
R1860	1-220-878-81	s	RES, CHIP 22 (1005)
R1861	1-220-878-81	s	RES, CHIP 22 (1005)
R1862	1-220-878-81	s	RES, CHIP 22 (1005)
R1863	1-220-878-81	s	RES, CHIP 22 (1005)
R1864	1-220-878-81	s	RES, CHIP 22 (1005)
R1865	1-220-878-81	s	RES, CHIP 22 (1005)
R1866	1-220-878-81	s	RES, CHIP 22 (1005)
R1867	1-220-878-81	s	RES, CHIP 22 (1005)
R1868	1-220-878-81	s	RES, CHIP 22 (1005)
R1869	1-220-878-81	s	RES, CHIP 22 (1005)
R1870	1-220-878-81	s	RES, CHIP 22 (1005)
R1871	1-220-878-81	s	RES, CHIP 22 (1005)
R1872	1-220-878-81	s	RES, CHIP 22 (1005)
R1873	1-220-878-81	s	RES, CHIP 22 (1005)
R1874	1-220-878-81	s	RES, CHIP 22 (1005)
R1875	1-220-878-81	s	RES, CHIP 22 (1005)
R1876	1-220-878-81	s	RES, CHIP 22 (1005)
R1877	1-220-878-81	s	RES, CHIP 22 (1005)
R1878	1-220-878-81	s	RES, CHIP 22 (1005)
R1879	1-208-855-81	s	RES, CHIP 47 (1005)
R1880	1-208-855-81	s	RES, CHIP 47 (1005)
R1881	1-220-878-81	s	RES, CHIP 22 (1005)
R1882	1-220-878-81	s	RES, CHIP 22 (1005)
R1883	1-208-855-81	s	RES, CHIP 47 (1005)
R1884	1-208-855-81	s	RES, CHIP 47 (1005)
R1885	1-220-878-81	s	RES, CHIP 22 (1005)
R1886	1-220-878-81	s	RES, CHIP 22 (1005)
R1887	1-220-878-81	s	RES, CHIP 22 (1005)
R1888	1-220-878-81	s	RES, CHIP 22 (1005)
R1889	1-220-878-81	s	RES, CHIP 22 (1005)
R1890	1-220-878-81	s	RES, CHIP 22 (1005)
R1891	1-220-878-81	s	RES, CHIP 22 (1005)
R1892	1-220-878-81	s	RES, CHIP 22 (1005)
R1893	1-220-878-81	s	RES, CHIP 22 (1005)
R1894	1-220-878-81	s	RES, CHIP 22 (1005)
R1895	1-220-878-81	s	RES, CHIP 22 (1005)
R1896	1-220-878-81	s	RES, CHIP 22 (1005)
R1897	1-220-878-81	s	RES, CHIP 22 (1005)
R1898	1-220-878-81	s	RES, CHIP 22 (1005)
R1899	1-220-878-81	s	RES, CHIP 22 (1005)
R1900	1-220-878-81	s	RES, CHIP 22 (1005)
R1901	1-220-878-81	s	RES, CHIP 22 (1005)
R1902	1-220-878-81	s	RES, CHIP 22 (1005)
R1903	1-220-878-81	s	RES, CHIP 22 (1005)
R1904	1-220-878-81	s	RES, CHIP 22 (1005)
R1905	1-208-863-81	s	RES, CHIP 100 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
R1967	1-220-878-81	s	RES, CHIP 22 (1005)
R1968	1-220-878-81	s	RES, CHIP 22 (1005)
R1969	1-220-878-81	s	RES, CHIP 22 (1005)
R1970	1-208-856-81	s	RES, CHIP 51 (1005)
R1971	1-208-856-81	s	RES, CHIP 51 (1005)
R1972	1-208-856-81	s	RES, CHIP 51 (1005)
R1973	1-208-856-81	s	RES, CHIP 51 (1005)
R1974	1-208-856-81	s	RES, CHIP 51 (1005)
R1975	1-208-856-81	s	RES, CHIP 51 (1005)
R1976	1-208-856-81	s	RES, CHIP 51 (1005)
R1977	1-208-856-81	s	RES, CHIP 51 (1005)
R1978	1-208-856-81	s	RES, CHIP 51 (1005)
R1979	1-208-856-81	s	RES, CHIP 51 (1005)
R1980	1-208-856-81	s	RES, CHIP 51 (1005)
R1981	1-208-856-81	s	RES, CHIP 51 (1005)
R1982	1-208-856-81	s	RES, CHIP 51 (1005)
R1983	1-208-856-81	s	RES, CHIP 51 (1005)
R1984	1-208-856-81	s	RES, CHIP 51 (1005)
R1985	1-208-856-81	s	RES, CHIP 51 (1005)
R1986	1-208-935-81	s	RES, CHIP 100K (1005)
R1987	1-208-935-81	s	RES, CHIP 100K (1005)
R2001	1-220-878-81	s	RES, CHIP 22 (1005)
R2002	1-220-878-81	s	RES, CHIP 22 (1005)
R2003	1-220-878-81	s	RES, CHIP 22 (1005)
R2004	1-220-878-81	s	RES, CHIP 22 (1005)
R2005	1-220-878-81	s	RES, CHIP 22 (1005)
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2007	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-875-81	s	RES, CHIP 330 (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2110	1-220-878-81	s	RES, CHIP 22 (1005)
R2111	1-220-878-81	s	RES, CHIP 22 (1005)
R2112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2115	1-208-927-81	s	RES, CHIP 47K (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-220-878-81	s	RES, CHIP 22 (1005)
R2303	1-220-878-81	s	RES, CHIP 22 (1005)
R2304	1-220-878-81	s	RES, CHIP 22 (1005)
R2305	1-220-878-81	s	RES, CHIP 22 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2307	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2309	1-220-878-81	s	RES, CHIP 22 (1005)
R2310	1-220-878-81	s	RES, CHIP 22 (1005)
R2400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-935-81	s	RES, CHIP 100K (1005)
R2409	1-208-935-81	s	RES, CHIP 100K (1005)
R2410	1-208-935-81	s	RES, CHIP 100K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2419	1-220-870-81	s	RES, CHIP 10 (1005)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R2420	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2421	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2422	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2423	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2424	1-220-870-81	s RES, CHIP 10 (1005)
R2425	1-220-870-81	s RES, CHIP 10 (1005)
R2426	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2427	1-220-878-81	s RES, CHIP 22 (1005)
R2428	1-220-878-81	s RES, CHIP 22 (1005)
R2429	1-220-878-81	s RES, CHIP 22 (1005)
R2430	1-220-878-81	s RES, CHIP 22 (1005)
R2431	1-220-878-81	s RES, CHIP 22 (1005)
R2433	1-220-878-81	s RES, CHIP 22 (1005)
R2434	1-220-878-81	s RES, CHIP 22 (1005)
R2437	1-220-870-81	s RES, CHIP 10 (1005)
R2440	1-208-855-81	s RES, CHIP 47 (1005)
R2441	1-220-878-81	s RES, CHIP 22 (1005)
R2442	1-220-878-81	s RES, CHIP 22 (1005)
R2443	1-220-878-81	s RES, CHIP 22 (1005)
R2444	1-220-878-81	s RES, CHIP 22 (1005)
R2445	1-208-855-81	s RES, CHIP 47 (1005)
R2446	1-220-878-81	s RES, CHIP 22 (1005)
R2447	1-220-878-81	s RES, CHIP 22 (1005)
R2448	1-220-878-81	s RES, CHIP 22 (1005)
R2449	1-220-878-81	s RES, CHIP 22 (1005)
R2450	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2451	1-208-935-81	s RES, CHIP 100K (1005)
R2452	1-208-935-81	s RES, CHIP 100K (1005)
R2455	1-208-855-81	s RES, CHIP 47 (1005)
R2456	1-208-855-81	s RES, CHIP 47 (1005)
R2457	1-208-855-81	s RES, CHIP 47 (1005)
R2463	1-208-855-81	s RES, CHIP 47 (1005)
R2464	1-208-855-81	s RES, CHIP 47 (1005)
R2465	1-208-855-81	s RES, CHIP 47 (1005)
R2467	1-220-878-81	s RES, CHIP 22 (1005)
R2468	1-208-855-81	s RES, CHIP 47 (1005)
R2469	1-208-855-81	s RES, CHIP 47 (1005)
R2470	1-220-878-81	s RES, CHIP 22 (1005)
R2471	1-220-878-81	s RES, CHIP 22 (1005)
R2472	1-220-878-81	s RES, CHIP 22 (1005)
R2473	1-220-878-81	s RES, CHIP 22 (1005)
R2474	1-220-870-81	s RES, CHIP 10 (1005)
R2475	1-220-870-81	s RES, CHIP 10 (1005)
R2476	1-220-878-81	s RES, CHIP 22 (1005)
R2483	1-220-878-81	s RES, CHIP 22 (1005)
R2484	1-220-878-81	s RES, CHIP 22 (1005)
R2485	1-208-855-81	s RES, CHIP 47 (1005)
R2486	1-208-855-81	s RES, CHIP 47 (1005)
RB1	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB4	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB5	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB6	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB7	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB200	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB201	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB202	1-234-370-21	s RES, NETWORK 22 (1005X4)

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
RB203	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB204	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB205	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB300	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB400	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB401	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB402	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB403	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB404	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB405	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB406	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB407	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB408	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB600	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB601	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
RB800	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB801	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB900	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB901	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB902	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB903	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB1000	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1001	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1002	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1003	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1013	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1014	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1200	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1207	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1208	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1400	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1401	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1407	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1408	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1604	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1605	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1606	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1607	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1610	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1700	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1701	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1702	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1703	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1704	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1705	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1706	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1707	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1708	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1709	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1900	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB1901	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB2002	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB2003	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB2100	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB2101	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB2106	1-234-378-21	s RES, NETWORK 10K (1005X4)
S900	1-692-270-41	s SWITCH, SLIDE

(DVP-45 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
S1900	1-692-270-41	s SWITCH, SLIDE
S1901	1-771-721-21	s SWITCH, TACTILE
X900	1-813-511-11	s OSCILLATOR, CRYSTAL (24MHZ)
X2400	1-813-823-11	s OSCILLATOR, CRYSTAL
X2401	1-813-824-11	s OSCILLATOR, CRYSTAL

DVP-45 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-884-B	s MOUNTED CIRCUIT BOARD, DVP-45
3pcs	3-855-938-01	s SCREW
C1	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C2	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C3	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C4	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C5	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C11	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C15	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C18	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C28	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C29	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C30	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C31	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C32	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C33	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C34	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C35	1-164-939-81	s CAP, CHIP CERAMIC 2200PF B 1005
C36	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C37	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C38	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C39	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C40	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C41	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C42	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C43	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C44	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C45	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C47	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C48	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C49	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C51	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C52	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C53	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C54	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C55	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C56	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C58	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C59	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C60	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C62	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C537	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C538	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C539	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C540	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C541	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C542	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C543	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C544	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C545	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C546	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C547	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C548	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C549	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C550	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C556	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C557	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C558	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C559	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C560	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C561	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C562	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C563	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C564	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C565	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C566	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C567	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C568	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C569	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C570	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C571	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C572	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C573	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C574	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C575	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C601	1-164-874-81	s	CAP, CHIP CERAMIC 100PF CH 1005
C602	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C603	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C702	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C703	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C705	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C900	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C918	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1103	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1200	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1203	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1204	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1205	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1206	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1209	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1210	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1211	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1212	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1213	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1214	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1215	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1216	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1217	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1218	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1219	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1220	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1221	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1222	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1223	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1224	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1225	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1226	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1227	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1228	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1229	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1230	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1231	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1232	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1233	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1234	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1235	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1236	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1237	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1238	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1239	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1240	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1241	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1242	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1243	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C1244	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1245	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1246	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1247	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1248	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1249	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1250	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1252	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1253	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1254	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1447	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1449	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1450	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1452	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1453	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1454	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C1455	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1457	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1458	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1600	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1601	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1606	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1607	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1608	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1609	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1611	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1613	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C1614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1702	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1703	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1704	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1705	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1706	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1707	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1708	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1709	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1710	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1711	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1712	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1808	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1956	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1957	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1958	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1959	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1960	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1961	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1962	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1963	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1964	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1965	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1966	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1967	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1968	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1969	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1970	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1971	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1972	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2100	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2101	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2104	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2106	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2107	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2108	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2109	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2110	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2111	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2112	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2113	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2114	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2116	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2117	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2118	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2119	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2122	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2123	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2124	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2125	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2126	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2128	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2130	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2131	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2132	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2133	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2134	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2135	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2136	1-100-567-81	s	CAP, CHIP CERAMIC 0.01MF B 1005
C2137	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C2138	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C2139	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2140	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2141	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2142	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2146	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2300	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C2402	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2403	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2414	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2415	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2418	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2420	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2426	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2427	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2428	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2429	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2430	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2431	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2432	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2433	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C2434	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
CN101	1-815-129-91	s	CONNECTOR, BOARD TO BOARD 40P
CN900	1-784-086-21	o	PIN, CONNECTOR (PC BOARD) 15P
CN1700	1-778-451-31	s	CONNECTOR, FFC/FPC(ZIF) AN 50P
CN1701	1-580-057-21	s	PIN, CONNECTOR (SMD) 4P
CN2100	1-764-093-21	o	PIN, CONNECTOR (PC BOARD) 8P
D100	8-719-024-71	s	DIODE 1SS362-TE85L
D101	8-719-024-71	s	DIODE 1SS362-TE85L
D102	8-719-024-71	s	DIODE 1SS362-TE85L
D103	8-719-024-71	s	DIODE 1SS362-TE85L
D104	8-719-024-71	s	DIODE 1SS362-TE85L
D105	8-719-024-71	s	DIODE 1SS362-TE85L
D106	8-719-024-71	s	DIODE 1SS362-TE85L
D900	8-719-074-31	s	DIODE CL-196YG-CD-T
D901	8-719-074-31	s	DIODE CL-196YG-CD-T
D902	8-719-074-31	s	DIODE CL-196YG-CD-T
D1700	6-501-052-02	s	DIODE CL-197HB1-D-T
D2000	8-719-077-09	s	DIODE CL-196HR-CD-T
D2001	8-719-077-09	s	DIODE CL-196HR-CD-T
D2002	8-719-077-09	s	DIODE CL-196HR-CD-T
D2003	8-719-077-09	s	DIODE CL-196HR-CD-T
D2004	8-719-074-31	s	DIODE CL-196YG-CD-T
D2005	8-719-074-31	s	DIODE CL-196YG-CD-T
D2006	8-719-074-31	s	DIODE CL-196YG-CD-T
D2007	8-719-074-31	s	DIODE CL-196YG-CD-T

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
E3	1-535-877-22	s	CHIP, CHECKER
E4	1-535-877-22	s	CHIP, CHECKER
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
E7	1-535-877-22	s	CHIP, CHECKER
E8	1-535-877-22	s	CHIP, CHECKER
FB1	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB2	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB3	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB4	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB5	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB6	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB7	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB8	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB9	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB10	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB11	1-469-379-21	s	FERRITE, EMI (SMD) (2012)
FB12	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB13	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB14	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB300	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB302	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB303	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB600	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB601	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB602	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB603	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB604	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB605	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB700	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB701	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB800	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB801	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB900	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB901	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1000	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1001	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1002	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1004	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1005	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1006	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1007	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1201	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1202	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1204	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1205	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1206	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1207	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1400	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1401	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1402	1-400-834-21	s	FERRITE, EMI (SMD) (1005)
FB1403	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1600	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1601	1-400-462-21	s	FERRITE, EMI (SMD) (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
FB1602	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1700	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1900	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2100	1-469-379-21	s FERRITE, EMI (SMD) (2012)
FB2101	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2102	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2400	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2401	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2403	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2404	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2405	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2406	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2407	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2408	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2409	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2410	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2411	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2413	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB2414	1-400-462-21	s FERRITE, EMI (SMD) (1005)
IC1	6-706-220-01	s IC LTC3411EMS#TR
IC2	6-706-220-01	s IC LTC3411EMS#TR
IC3	6-703-721-01	s IC TPS54310PWPR
IC4	6-703-721-01	s IC TPS54310PWPR
IC5	6-707-373-01	s IC TPS51100DGQR
IC6	6-707-373-01	s IC TPS51100DGQR
IC7	6-708-503-01	s IC LTC3407EMSE-2#TR
IC8	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC9	6-706-220-01	s IC LTC3411EMS#TR
IC100	8-759-278-58	s IC NJM4558V-TE2
IC101	8-759-338-95	s IC NJM2903V(Te2)
IC102	8-759-646-99	s IC NJM4556AV(Te2)
IC105	8-759-655-22	s IC TC7WH34FK(Te85R)
IC201	8-759-592-49	s IC TC7SZ125FU(Te85R)
IC401	8-759-573-97	s IC SN74LVC541APWR
IC402	8-759-592-49	s IC TC7SZ125FU(Te85R)
IC403	8-759-592-49	s IC TC7SZ125FU(Te85R)
IC600	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC601	6-704-643-01	s IC R3112N221A-TR-FA
IC602	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC603	6-700-599-01	s IC TC7SA08FU(Te85R)
IC604	6-700-599-01	s IC TC7SA08FU(Te85R)
IC700	6-704-659-01	s IC AD1896AYRSZRL
IC701	6-709-647-01	s IC TLC2932AIPWR
IC702	6-709-647-01	s IC TLC2932AIPWR
IC703	6-704-659-01	s IC AD1896AYRSZRL
IC902	8-759-655-22	s IC TC7WH34FK(Te85R)
IC903	8-759-573-97	s IC SN74LVC541APWR
IC1000	8-753-276-37	o IC CXD3195AGG-T6
IC1200	8-753-276-37	o IC CXD3195AGG-T6
IC1400	8-753-276-37	o IC CXD3195AGG-T6
IC1602	6-703-848-01	s IC SN74CB3T3306DCUR
IC1700	8-759-655-22	s IC TC7WH34FK(Te85R)
IC1701	8-759-392-81	s IC SN74LVC16245ADGGR
IC1702	8-759-392-81	s IC SN74LVC16245ADGGR
IC2102	8-759-592-49	s IC TC7SZ125FU(Te85R)
IC2401	6-708-277-01	s IC CDCVF25081PWR
IC2402	6-708-277-01	s IC CDCVF25081PWR
IC2403	6-712-342-01	s IC CDCVF2310PWR
IC2405	8-759-691-77	s IC TC74VCX541FT(EL)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
IC2406	6-700-599-01	s IC TC7SA08FU(Te85R)
IC2408	8-759-573-97	s IC SN74LVC541APWR
IC2409	6-700-599-01	s IC TC7SA08FU(Te85R)
IC2410	8-759-655-22	s IC TC7WH34FK(Te85R)
IC2411	6-708-277-01	s IC CDCVF25081PWR
IC2412	8-759-691-77	s IC TC74VCX541FT(EL)
IC2413	6-703-875-01	s IC CDCVF2505PWR
IC2414	6-700-599-01	s IC TC7SA08FU(Te85R)
IC2415	6-700-599-01	s IC TC7SA08FU(Te85R)
IC2416	8-759-655-22	s IC TC7WH34FK(Te85R)
IC2417	6-700-599-01	s IC TC7SA08FU(Te85R)
L1	1-400-870-21	s COIL, CHOKE 2.2UH
L2	1-400-870-21	s COIL, CHOKE 2.2UH
L3	1-456-046-21	s COIL, CHOKE (SMD) 10UH(10X10)
L4	1-456-046-21	s COIL, CHOKE (SMD) 10UH(10X10)
L5	1-414-394-41	s INDUCTOR (SMD) 2.2UH
L6	1-414-394-41	s INDUCTOR (SMD) 2.2UH
L7	1-400-870-21	s COIL, CHOKE 2.2UH
Q1	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q2	6-550-832-01	s TRANSISTOR SI2301BDS-T1
Q3	6-550-832-01	s TRANSISTOR SI2301BDS-T1
Q4	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q5	6-550-832-01	s TRANSISTOR SI2301BDS-T1
Q101	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q600	8-729-928-82	s TRANSISTOR DTC144EE-TL
R1	1-208-919-81	s RES, CHIP 22K (1005)
R2	1-208-935-81	s RES, CHIP 100K (1005)
R3	1-208-935-81	s RES, CHIP 100K (1005)
R4	1-208-919-81	s RES, CHIP 22K (1005)
R5	1-208-935-81	s RES, CHIP 100K (1005)
R6	1-208-935-81	s RES, CHIP 100K (1005)
R7	1-208-911-81	s RES, CHIP 10K (1005)
R8	1-208-935-81	s RES, CHIP 100K (1005)
R9	1-208-935-81	s RES, CHIP 100K (1005)
R11	1-208-899-81	s RES, CHIP 3.3K (1005)
R12	1-208-911-81	s RES, CHIP 10K (1005)
R19	1-208-879-81	s RES, CHIP 470 (1005)
R20	1-218-990-81	s CONDUCTOR, CHIP (1005)
R21	1-208-895-81	s RES, CHIP 2.2K (1005)
R22	1-208-879-81	s RES, CHIP 470 (1005)
R23	1-218-990-81	s CONDUCTOR, CHIP (1005)
R24	1-208-895-81	s RES, CHIP 2.2K (1005)
R26	1-208-935-81	s RES, CHIP 100K (1005)
R28	1-208-927-81	s RES, CHIP 47K (1005)
R29	1-208-903-81	s RES, CHIP 4.7K (1005)
R30	1-218-990-81	s CONDUCTOR, CHIP (1005)
R31	1-208-899-81	s RES, CHIP 3.3K (1005)
R32	1-208-911-81	s RES, CHIP 10K (1005)
R33	1-208-903-81	s RES, CHIP 4.7K (1005)
R34	1-208-899-81	s RES, CHIP 3.3K (1005)
R35	1-208-927-81	s RES, CHIP 47K (1005)
R36	1-208-911-81	s RES, CHIP 10K (1005)
R37	1-218-990-81	s CONDUCTOR, CHIP (1005)
R38	1-208-911-81	s RES, CHIP 10K (1005)
R39	1-208-915-81	s RES, CHIP 15K (1005)
R40	1-208-911-81	s RES, CHIP 10K (1005)
R41	1-208-923-81	s RES, CHIP 33K (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R42	1-208-959-81	s RES, CHIP 1M (1005)
R43	1-208-911-81	s RES, CHIP 10K (1005)
R44	1-208-947-81	s RES, CHIP 330K (1005)
R45	1-208-911-81	s RES, CHIP 10K (1005)
R46	1-208-947-81	s RES, CHIP 330K (1005)
R47	1-208-935-81	s RES, CHIP 100K (1005)
R48	1-208-927-81	s RES, CHIP 47K (1005)
R49	1-208-947-81	s RES, CHIP 330K (1005)
R50	1-208-911-81	s RES, CHIP 10K (1005)
R100	1-218-990-81	s CONDUCTOR, CHIP (1005)
R101	1-208-855-81	s RES, CHIP 47 (1005)
R102	1-208-911-81	s RES, CHIP 10K (1005)
R103	1-208-911-81	s RES, CHIP 10K (1005)
R104	1-208-855-81	s RES, CHIP 47 (1005)
R106	1-208-911-81	s RES, CHIP 10K (1005)
R107	1-208-911-81	s RES, CHIP 10K (1005)
R108	1-208-903-81	s RES, CHIP 4.7K (1005)
R109	1-208-899-81	s RES, CHIP 3.3K (1005)
R111	1-208-927-81	s RES, CHIP 47K (1005)
R112	1-208-927-81	s RES, CHIP 47K (1005)
R113	1-208-959-81	s RES, CHIP 1M (1005)
R114	1-208-879-81	s RES, CHIP 470 (1005)
R115	1-208-879-81	s RES, CHIP 470 (1005)
R116	1-208-903-81	s RES, CHIP 4.7K (1005)
R117	1-208-887-81	s RES, CHIP 1.0K (1005)
R118	1-208-895-81	s RES, CHIP 2.2K (1005)
R119	1-208-895-81	s RES, CHIP 2.2K (1005)
R120	1-208-935-81	s RES, CHIP 100K (1005)
R121	1-208-855-81	s RES, CHIP 47 (1005)
R122	1-208-879-81	s RES, CHIP 470 (1005)
R123	1-208-895-81	s RES, CHIP 2.2K (1005)
R124	1-208-907-81	s RES, CHIP 6.8K (1005)
R125	1-208-935-81	s RES, CHIP 100K (1005)
R126	1-208-903-81	s RES, CHIP 4.7K (1005)
R127	1-208-860-81	s RES, CHIP 75 (1005)
R128	1-208-927-81	s RES, CHIP 47K (1005)
R129	1-208-935-81	s RES, CHIP 100K (1005)
R130	1-208-899-81	s RES, CHIP 3.3K (1005)
R131	1-208-895-81	s RES, CHIP 2.2K (1005)
R132	1-220-878-81	s RES, CHIP 22 (1005)
R133	1-220-878-81	s RES, CHIP 22 (1005)
R134	1-220-878-81	s RES, CHIP 22 (1005)
R135	1-220-878-81	s RES, CHIP 22 (1005)
R136	1-208-943-81	s RES, CHIP 220K (1005)
R137	1-208-943-81	s RES, CHIP 220K (1005)
R138	1-220-878-81	s RES, CHIP 22 (1005)
R139	1-220-878-81	s RES, CHIP 22 (1005)
R140	1-220-878-81	s RES, CHIP 22 (1005)
R141	1-220-878-81	s RES, CHIP 22 (1005)
R142	1-220-878-81	s RES, CHIP 22 (1005)
R200	1-220-878-81	s RES, CHIP 22 (1005)
R204	1-220-878-81	s RES, CHIP 22 (1005)
R205	1-220-878-81	s RES, CHIP 22 (1005)
R206	1-220-878-81	s RES, CHIP 22 (1005)
R207	1-220-878-81	s RES, CHIP 22 (1005)
R208	1-220-878-81	s RES, CHIP 22 (1005)
R209	1-208-855-81	s RES, CHIP 47 (1005)
R210	1-208-855-81	s RES, CHIP 47 (1005)
R211	1-218-990-81	s CONDUCTOR, CHIP (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R212	1-218-990-81	s CONDUCTOR, CHIP (1005)
R213	1-218-990-81	s CONDUCTOR, CHIP (1005)
R214	1-218-990-81	s CONDUCTOR, CHIP (1005)
R217	1-218-990-81	s CONDUCTOR, CHIP (1005)
R218	1-218-990-81	s CONDUCTOR, CHIP (1005)
R219	1-218-990-81	s CONDUCTOR, CHIP (1005)
R220	1-208-855-81	s RES, CHIP 47 (1005)
R221	1-220-878-81	s RES, CHIP 22 (1005)
R222	1-220-878-81	s RES, CHIP 22 (1005)
R223	1-220-878-81	s RES, CHIP 22 (1005)
R225	1-218-990-81	s CONDUCTOR, CHIP (1005)
R226	1-218-990-81	s CONDUCTOR, CHIP (1005)
R227	1-208-875-81	s RES, CHIP 330 (1005)
R228	1-208-903-81	s RES, CHIP 4.7K (1005)
R229	1-218-990-81	s CONDUCTOR, CHIP (1005)
R230	1-218-990-81	s CONDUCTOR, CHIP (1005)
R231	1-218-990-81	s CONDUCTOR, CHIP (1005)
R232	1-208-857-81	s RES, CHIP 56 (1005)
R233	1-208-857-81	s RES, CHIP 56 (1005)
R234	1-208-903-81	s RES, CHIP 4.7K (1005)
R237	1-218-990-81	s CONDUCTOR, CHIP (1005)
R238	1-220-878-81	s RES, CHIP 22 (1005)
R239	1-220-878-81	s RES, CHIP 22 (1005)
R240	1-218-990-81	s CONDUCTOR, CHIP (1005)
R241	1-218-990-81	s CONDUCTOR, CHIP (1005)
R242	1-208-887-81	s RES, CHIP 1.0K (1005)
R250	1-220-878-81	s RES, CHIP 22 (1005)
R251	1-220-878-81	s RES, CHIP 22 (1005)
R252	1-220-878-81	s RES, CHIP 22 (1005)
R253	1-220-878-81	s RES, CHIP 22 (1005)
R254	1-220-878-81	s RES, CHIP 22 (1005)
R255	1-220-878-81	s RES, CHIP 22 (1005)
R256	1-220-878-81	s RES, CHIP 22 (1005)
R257	1-220-878-81	s RES, CHIP 22 (1005)
R262	1-208-911-81	s RES, CHIP 10K (1005)
R263	1-208-911-81	s RES, CHIP 10K (1005)
R264	1-208-911-81	s RES, CHIP 10K (1005)
R265	1-208-911-81	s RES, CHIP 10K (1005)
R266	1-208-911-81	s RES, CHIP 10K (1005)
R267	1-208-911-81	s RES, CHIP 10K (1005)
R268	1-208-911-81	s RES, CHIP 10K (1005)
R269	1-208-911-81	s RES, CHIP 10K (1005)
R270	1-220-878-81	s RES, CHIP 22 (1005)
R271	1-220-878-81	s RES, CHIP 22 (1005)
R272	1-220-878-81	s RES, CHIP 22 (1005)
R273	1-208-911-81	s RES, CHIP 10K (1005)
R274	1-208-911-81	s RES, CHIP 10K (1005)
R300	1-208-856-81	s RES, CHIP 51 (1005)
R301	1-208-856-81	s RES, CHIP 51 (1005)
R302	1-208-856-81	s RES, CHIP 51 (1005)
R303	1-208-856-81	s RES, CHIP 51 (1005)
R304	1-208-856-81	s RES, CHIP 51 (1005)
R305	1-208-856-81	s RES, CHIP 51 (1005)
R306	1-208-856-81	s RES, CHIP 51 (1005)
R307	1-208-856-81	s RES, CHIP 51 (1005)
R308	1-208-856-81	s RES, CHIP 51 (1005)
R309	1-208-856-81	s RES, CHIP 51 (1005)
R310	1-208-856-81	s RES, CHIP 51 (1005)
R311	1-208-856-81	s RES, CHIP 51 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description	
R382	1-220-878-81	s	RES, CHIP	22 (1005)
R383	1-220-878-81	s	RES, CHIP	22 (1005)
R384	1-220-878-81	s	RES, CHIP	22 (1005)
R385	1-220-878-81	s	RES, CHIP	22 (1005)
R386	1-220-878-81	s	RES, CHIP	22 (1005)
R387	1-220-878-81	s	RES, CHIP	22 (1005)
R388	1-220-878-81	s	RES, CHIP	22 (1005)
R389	1-220-878-81	s	RES, CHIP	22 (1005)
R390	1-220-878-81	s	RES, CHIP	22 (1005)
R391	1-220-878-81	s	RES, CHIP	22 (1005)
R392	1-220-878-81	s	RES, CHIP	22 (1005)
R393	1-220-878-81	s	RES, CHIP	22 (1005)
R394	1-220-878-81	s	RES, CHIP	22 (1005)
R395	1-220-878-81	s	RES, CHIP	22 (1005)
R396	1-220-878-81	s	RES, CHIP	22 (1005)
R397	1-220-878-81	s	RES, CHIP	22 (1005)
R398	1-220-878-81	s	RES, CHIP	22 (1005)
R399	1-220-878-81	s	RES, CHIP	22 (1005)
R400	1-220-878-81	s	RES, CHIP	22 (1005)
R401	1-220-878-81	s	RES, CHIP	22 (1005)
R402	1-220-878-81	s	RES, CHIP	22 (1005)
R403	1-220-878-81	s	RES, CHIP	22 (1005)
R404	1-208-870-81	s	RES, CHIP	200 (1005)
R405	1-220-878-81	s	RES, CHIP	22 (1005)
R406	1-220-878-81	s	RES, CHIP	22 (1005)
R407	1-220-878-81	s	RES, CHIP	22 (1005)
R408	1-220-878-81	s	RES, CHIP	22 (1005)
R409	1-220-878-81	s	RES, CHIP	22 (1005)
R410	1-220-878-81	s	RES, CHIP	22 (1005)
R411	1-220-878-81	s	RES, CHIP	22 (1005)
R412	1-220-878-81	s	RES, CHIP	22 (1005)
R413	1-220-878-81	s	RES, CHIP	22 (1005)
R414	1-220-878-81	s	RES, CHIP	22 (1005)
R415	1-220-878-81	s	RES, CHIP	22 (1005)
R416	1-220-878-81	s	RES, CHIP	22 (1005)
R417	1-220-878-81	s	RES, CHIP	22 (1005)
R418	1-220-878-81	s	RES, CHIP	22 (1005)
R419	1-220-878-81	s	RES, CHIP	22 (1005)
R420	1-220-878-81	s	RES, CHIP	22 (1005)
R421	1-220-878-81	s	RES, CHIP	22 (1005)
R422	1-220-878-81	s	RES, CHIP	22 (1005)
R423	1-220-878-81	s	RES, CHIP	22 (1005)
R424	1-220-878-81	s	RES, CHIP	22 (1005)
R425	1-220-878-81	s	RES, CHIP	22 (1005)
R426	1-220-878-81	s	RES, CHIP	22 (1005)
R427	1-220-878-81	s	RES, CHIP	22 (1005)
R428	1-220-878-81	s	RES, CHIP	22 (1005)
R429	1-220-878-81	s	RES, CHIP	22 (1005)
R430	1-220-878-81	s	RES, CHIP	22 (1005)
R431	1-220-878-81	s	RES, CHIP	22 (1005)
R432	1-220-878-81	s	RES, CHIP	22 (1005)
R433	1-220-878-81	s	RES, CHIP	22 (1005)
R434	1-220-878-81	s	RES, CHIP	22 (1005)
R435	1-220-878-81	s	RES, CHIP	22 (1005)
R436	1-220-878-81	s	RES, CHIP	22 (1005)
R437	1-220-878-81	s	RES, CHIP	22 (1005)
R438	1-220-878-81	s	RES, CHIP	22 (1005)
R439	1-220-878-81	s	RES, CHIP	22 (1005)
R440	1-220-878-81	s	RES, CHIP	22 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R441	1-220-878-81	s RES, CHIP 22 (1005)
R442	1-220-878-81	s RES, CHIP 22 (1005)
R443	1-220-878-81	s RES, CHIP 22 (1005)
R444	1-220-878-81	s RES, CHIP 22 (1005)
R445	1-220-878-81	s RES, CHIP 22 (1005)
R446	1-220-878-81	s RES, CHIP 22 (1005)
R447	1-220-878-81	s RES, CHIP 22 (1005)
R448	1-220-878-81	s RES, CHIP 22 (1005)
R449	1-220-878-81	s RES, CHIP 22 (1005)
R450	1-220-878-81	s RES, CHIP 22 (1005)
R451	1-208-870-81	s RES, CHIP 200 (1005)
R452	1-220-878-81	s RES, CHIP 22 (1005)
R453	1-220-878-81	s RES, CHIP 22 (1005)
R454	1-220-878-81	s RES, CHIP 22 (1005)
R455	1-220-878-81	s RES, CHIP 22 (1005)
R456	1-220-878-81	s RES, CHIP 22 (1005)
R457	1-220-878-81	s RES, CHIP 22 (1005)
R458	1-220-878-81	s RES, CHIP 22 (1005)
R459	1-220-878-81	s RES, CHIP 22 (1005)
R460	1-220-878-81	s RES, CHIP 22 (1005)
R461	1-220-878-81	s RES, CHIP 22 (1005)
R462	1-220-878-81	s RES, CHIP 22 (1005)
R463	1-220-878-81	s RES, CHIP 22 (1005)
R464	1-220-878-81	s RES, CHIP 22 (1005)
R465	1-220-878-81	s RES, CHIP 22 (1005)
R466	1-220-878-81	s RES, CHIP 22 (1005)
R467	1-220-878-81	s RES, CHIP 22 (1005)
R468	1-220-878-81	s RES, CHIP 22 (1005)
R469	1-220-878-81	s RES, CHIP 22 (1005)
R470	1-220-878-81	s RES, CHIP 22 (1005)
R471	1-220-878-81	s RES, CHIP 22 (1005)
R472	1-220-878-81	s RES, CHIP 22 (1005)
R473	1-220-878-81	s RES, CHIP 22 (1005)
R474	1-220-878-81	s RES, CHIP 22 (1005)
R475	1-220-878-81	s RES, CHIP 22 (1005)
R476	1-208-870-81	s RES, CHIP 200 (1005)
R477	1-220-878-81	s RES, CHIP 22 (1005)
R478	1-208-856-81	s RES, CHIP 51 (1005)
R479	1-208-856-81	s RES, CHIP 51 (1005)
R480	1-208-856-81	s RES, CHIP 51 (1005)
R481	1-208-856-81	s RES, CHIP 51 (1005)
R482	1-208-856-81	s RES, CHIP 51 (1005)
R483	1-208-856-81	s RES, CHIP 51 (1005)
R484	1-208-856-81	s RES, CHIP 51 (1005)
R485	1-208-856-81	s RES, CHIP 51 (1005)
R486	1-208-856-81	s RES, CHIP 51 (1005)
R487	1-208-856-81	s RES, CHIP 51 (1005)
R488	1-208-856-81	s RES, CHIP 51 (1005)
R489	1-208-856-81	s RES, CHIP 51 (1005)
R490	1-208-856-81	s RES, CHIP 51 (1005)
R491	1-208-856-81	s RES, CHIP 51 (1005)
R492	1-208-856-81	s RES, CHIP 51 (1005)
R493	1-208-856-81	s RES, CHIP 51 (1005)
R494	1-208-856-81	s RES, CHIP 51 (1005)
R495	1-208-856-81	s RES, CHIP 51 (1005)
R496	1-208-856-81	s RES, CHIP 51 (1005)
R497	1-208-856-81	s RES, CHIP 51 (1005)
R498	1-208-856-81	s RES, CHIP 51 (1005)
R499	1-208-863-81	s RES, CHIP 100 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R500	1-208-863-81	s RES, CHIP 100 (1005)
R600	1-208-903-81	s RES, CHIP 4.7K (1005)
R601	1-208-903-81	s RES, CHIP 4.7K (1005)
R602	1-208-903-81	s RES, CHIP 4.7K (1005)
R608	1-220-878-81	s RES, CHIP 22 (1005)
R609	1-208-911-81	s RES, CHIP 10K (1005)
R610	1-220-878-81	s RES, CHIP 22 (1005)
R611	1-208-887-81	s RES, CHIP 1.0K (1005)
R700	1-218-990-81	s CONDUCTOR, CHIP (1005)
R701	1-208-899-81	s RES, CHIP 3.3K (1005)
R703	1-208-899-81	s RES, CHIP 3.3K (1005)
R705	1-208-915-81	s RES, CHIP 15K (1005)
R706	1-208-895-81	s RES, CHIP 2.2K (1005)
R707	1-208-871-81	s RES, CHIP 220 (1005)
R708	1-208-915-81	s RES, CHIP 15K (1005)
R709	1-208-895-81	s RES, CHIP 2.2K (1005)
R710	1-208-871-81	s RES, CHIP 220 (1005)
R711	1-208-855-81	s RES, CHIP 47 (1005)
R712	1-208-855-81	s RES, CHIP 47 (1005)
R713	1-218-990-81	s CONDUCTOR, CHIP (1005)
R718	1-218-990-81	s CONDUCTOR, CHIP (1005)
R719	1-218-990-81	s CONDUCTOR, CHIP (1005)
R720	1-218-990-81	s CONDUCTOR, CHIP (1005)
R722	1-218-990-81	s CONDUCTOR, CHIP (1005)
R801	1-218-990-81	s CONDUCTOR, CHIP (1005)
R802	1-218-990-81	s CONDUCTOR, CHIP (1005)
R803	1-208-927-81	s RES, CHIP 47K (1005)
R804	1-218-990-81	s CONDUCTOR, CHIP (1005)
R805	1-218-990-81	s CONDUCTOR, CHIP (1005)
R806	1-218-990-81	s CONDUCTOR, CHIP (1005)
R807	1-218-990-81	s CONDUCTOR, CHIP (1005)
R808	1-218-990-81	s CONDUCTOR, CHIP (1005)
R809	1-208-927-81	s RES, CHIP 47K (1005)
R810	1-208-927-81	s RES, CHIP 47K (1005)
R812	1-218-990-81	s CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s CONDUCTOR, CHIP (1005)
R814	1-208-927-81	s RES, CHIP 47K (1005)
R815	1-218-990-81	s CONDUCTOR, CHIP (1005)
R816	1-218-990-81	s CONDUCTOR, CHIP (1005)
R817	1-218-990-81	s CONDUCTOR, CHIP (1005)
R818	1-218-990-81	s CONDUCTOR, CHIP (1005)
R819	1-218-990-81	s CONDUCTOR, CHIP (1005)
R820	1-208-927-81	s RES, CHIP 47K (1005)
R821	1-208-927-81	s RES, CHIP 47K (1005)
R901	1-218-990-81	s CONDUCTOR, CHIP (1005)
R902	1-218-990-81	s CONDUCTOR, CHIP (1005)
R903	1-208-927-81	s RES, CHIP 47K (1005)
R904	1-208-927-81	s RES, CHIP 47K (1005)
R905	1-208-927-81	s RES, CHIP 47K (1005)
R906	1-208-927-81	s RES, CHIP 47K (1005)
R907	1-218-990-81	s CONDUCTOR, CHIP (1005)
R908	1-208-927-81	s RES, CHIP 47K (1005)
R909	1-208-927-81	s RES, CHIP 47K (1005)
R910	1-218-990-81	s CONDUCTOR, CHIP (1005)
R911	1-208-903-81	s RES, CHIP 4.7K (1005)
R912	1-208-903-81	s RES, CHIP 4.7K (1005)
R913	1-218-990-81	s CONDUCTOR, CHIP (1005)
R914	1-218-990-81	s CONDUCTOR, CHIP (1005)
R915	1-208-855-81	s RES, CHIP 47 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R916	1-208-855-81	s RES, CHIP 47 (1005)
R917	1-208-855-81	s RES, CHIP 47 (1005)
R921	1-208-903-81	s RES, CHIP 4.7K (1005)
R922	1-208-875-81	s RES, CHIP 330 (1005)
R1000	1-220-878-81	s RES, CHIP 22 (1005)
R1005	1-220-878-81	s RES, CHIP 22 (1005)
R1006	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1007	1-208-911-81	s RES, CHIP 10K (1005)
R1008	1-220-882-81	s RES, CHIP 33 (1005)
R1009	1-220-878-81	s RES, CHIP 22 (1005)
R1011	1-208-935-81	s RES, CHIP 100K (1005)
R1013	1-208-911-81	s RES, CHIP 10K (1005)
R1014	1-208-911-81	s RES, CHIP 10K (1005)
R1015	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1016	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1017	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1018	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1019	1-208-911-81	s RES, CHIP 10K (1005)
R1020	1-220-878-81	s RES, CHIP 22 (1005)
R1022	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1023	1-220-878-81	s RES, CHIP 22 (1005)
R1025	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1026	1-220-878-81	s RES, CHIP 22 (1005)
R1205	1-220-882-81	s RES, CHIP 33 (1005)
R1206	1-220-882-81	s RES, CHIP 33 (1005)
R1207	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1208	1-220-878-81	s RES, CHIP 22 (1005)
R1209	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1210	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1211	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1213	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1214	1-208-911-81	s RES, CHIP 10K (1005)
R1216	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1217	1-220-878-81	s RES, CHIP 22 (1005)
R1219	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1220	1-220-878-81	s RES, CHIP 22 (1005)
R1221	1-220-878-81	s RES, CHIP 22 (1005)
R1400	1-220-878-81	s RES, CHIP 22 (1005)
R1405	1-220-882-81	s RES, CHIP 33 (1005)
R1406	1-220-882-81	s RES, CHIP 33 (1005)
R1407	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1408	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1409	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1410	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1411	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1412	1-220-878-81	s RES, CHIP 22 (1005)
R1413	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1414	1-208-911-81	s RES, CHIP 10K (1005)
R1416	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1417	1-220-878-81	s RES, CHIP 22 (1005)
R1419	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1420	1-220-878-81	s RES, CHIP 22 (1005)
R1600	1-208-911-81	s RES, CHIP 10K (1005)
R1601	1-208-911-81	s RES, CHIP 10K (1005)
R1602	1-208-911-81	s RES, CHIP 10K (1005)
R1603	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1604	1-208-943-81	s RES, CHIP 220K (1005)
R1605	1-208-943-81	s RES, CHIP 220K (1005)
R1606	1-208-943-81	s RES, CHIP 220K (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1607	1-208-943-81	s RES, CHIP 220K (1005)
R1608	1-208-911-81	s RES, CHIP 10K (1005)
R1609	1-208-911-81	s RES, CHIP 10K (1005)
R1610	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1611	1-208-943-81	s RES, CHIP 220K (1005)
R1612	1-208-943-81	s RES, CHIP 220K (1005)
R1613	1-208-943-81	s RES, CHIP 220K (1005)
R1614	1-208-943-81	s RES, CHIP 220K (1005)
R1615	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1616	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1617	1-208-943-81	s RES, CHIP 220K (1005)
R1618	1-208-911-81	s RES, CHIP 10K (1005)
R1619	1-208-911-81	s RES, CHIP 10K (1005)
R1700	1-208-879-81	s RES, CHIP 470 (1005)
R1703	1-208-911-81	s RES, CHIP 10K (1005)
R1704	1-220-878-81	s RES, CHIP 22 (1005)
R1705	1-220-878-81	s RES, CHIP 22 (1005)
R1706	1-208-871-81	s RES, CHIP 220 (1005)
R1707	1-208-911-81	s RES, CHIP 10K (1005)
R1708	1-220-882-81	s RES, CHIP 33 (1005)
R1709	1-208-855-81	s RES, CHIP 47 (1005)
R1710	1-208-911-81	s RES, CHIP 10K (1005)
R1711	1-208-911-81	s RES, CHIP 10K (1005)
R1712	1-208-911-81	s RES, CHIP 10K (1005)
R1713	1-208-903-81	s RES, CHIP 4.7K (1005)
R1716	1-208-861-81	s RES, CHIP 82 (1005)
R1717	1-208-861-81	s RES, CHIP 82 (1005)
R1718	1-208-861-81	s RES, CHIP 82 (1005)
R1719	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1720	1-208-911-81	s RES, CHIP 10K (1005)
R1721	1-208-911-81	s RES, CHIP 10K (1005)
R1722	1-208-905-81	s RES, CHIP 5.6K (1005)
R1723	1-208-911-81	s RES, CHIP 10K (1005)
R1724	1-220-878-81	s RES, CHIP 22 (1005)
R1725	1-208-863-81	s RES, CHIP 100 (1005)
R1731	1-208-911-81	s RES, CHIP 10K (1005)
R1732	1-208-911-81	s RES, CHIP 10K (1005)
R1733	1-220-870-81	s RES, CHIP 10 (1005)
R1734	1-220-878-81	s RES, CHIP 22 (1005)
R1735	1-208-911-81	s RES, CHIP 10K (1005)
R1736	1-208-911-81	s RES, CHIP 10K (1005)
R1737	1-208-911-81	s RES, CHIP 10K (1005)
R1738	1-220-878-81	s RES, CHIP 22 (1005)
R1739	1-220-878-81	s RES, CHIP 22 (1005)
R1740	1-208-856-81	s RES, CHIP 51 (1005)
R1741	1-208-856-81	s RES, CHIP 51 (1005)
R1742	1-208-856-81	s RES, CHIP 51 (1005)
R1743	1-208-856-81	s RES, CHIP 51 (1005)
R1744	1-208-856-81	s RES, CHIP 51 (1005)
R1745	1-208-856-81	s RES, CHIP 51 (1005)
R1746	1-208-856-81	s RES, CHIP 51 (1005)
R1747	1-208-856-81	s RES, CHIP 51 (1005)
R1748	1-208-856-81	s RES, CHIP 51 (1005)
R1749	1-208-856-81	s RES, CHIP 51 (1005)
R1750	1-208-856-81	s RES, CHIP 51 (1005)
R1751	1-208-856-81	s RES, CHIP 51 (1005)
R1752	1-208-856-81	s RES, CHIP 51 (1005)
R1753	1-208-856-81	s RES, CHIP 51 (1005)
R1754	1-208-856-81	s RES, CHIP 51 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1814	1-220-878-81	s	RES, CHIP 22 (1005)
R1815	1-220-878-81	s	RES, CHIP 22 (1005)
R1816	1-220-878-81	s	RES, CHIP 22 (1005)
R1817	1-220-878-81	s	RES, CHIP 22 (1005)
R1818	1-220-878-81	s	RES, CHIP 22 (1005)
R1819	1-220-878-81	s	RES, CHIP 22 (1005)
R1820	1-220-878-81	s	RES, CHIP 22 (1005)
R1821	1-220-878-81	s	RES, CHIP 22 (1005)
R1822	1-220-878-81	s	RES, CHIP 22 (1005)
R1823	1-220-878-81	s	RES, CHIP 22 (1005)
R1824	1-220-878-81	s	RES, CHIP 22 (1005)
R1825	1-220-878-81	s	RES, CHIP 22 (1005)
R1826	1-220-878-81	s	RES, CHIP 22 (1005)
R1827	1-220-878-81	s	RES, CHIP 22 (1005)
R1828	1-220-878-81	s	RES, CHIP 22 (1005)
R1829	1-220-878-81	s	RES, CHIP 22 (1005)
R1830	1-220-878-81	s	RES, CHIP 22 (1005)
R1831	1-220-878-81	s	RES, CHIP 22 (1005)
R1832	1-220-878-81	s	RES, CHIP 22 (1005)
R1833	1-220-878-81	s	RES, CHIP 22 (1005)
R1834	1-220-878-81	s	RES, CHIP 22 (1005)
R1835	1-220-878-81	s	RES, CHIP 22 (1005)
R1836	1-220-878-81	s	RES, CHIP 22 (1005)
R1837	1-220-878-81	s	RES, CHIP 22 (1005)
R1838	1-220-878-81	s	RES, CHIP 22 (1005)
R1839	1-208-856-81	s	RES, CHIP 51 (1005)
R1840	1-208-856-81	s	RES, CHIP 51 (1005)
R1841	1-208-856-81	s	RES, CHIP 51 (1005)
R1842	1-208-856-81	s	RES, CHIP 51 (1005)
R1843	1-208-856-81	s	RES, CHIP 51 (1005)
R1844	1-208-856-81	s	RES, CHIP 51 (1005)
R1845	1-208-856-81	s	RES, CHIP 51 (1005)
R1846	1-208-856-81	s	RES, CHIP 51 (1005)
R1847	1-208-856-81	s	RES, CHIP 51 (1005)
R1848	1-208-856-81	s	RES, CHIP 51 (1005)
R1849	1-208-856-81	s	RES, CHIP 51 (1005)
R1850	1-208-856-81	s	RES, CHIP 51 (1005)
R1851	1-208-856-81	s	RES, CHIP 51 (1005)
R1852	1-208-856-81	s	RES, CHIP 51 (1005)
R1853	1-208-856-81	s	RES, CHIP 51 (1005)
R1854	1-208-856-81	s	RES, CHIP 51 (1005)
R1855	1-208-863-81	s	RES, CHIP 100 (1005)
R1856	1-208-855-81	s	RES, CHIP 47 (1005)
R1857	1-208-855-81	s	RES, CHIP 47 (1005)
R1858	1-220-878-81	s	RES, CHIP 22 (1005)
R1859	1-220-878-81	s	RES, CHIP 22 (1005)
R1860	1-220-878-81	s	RES, CHIP 22 (1005)
R1861	1-220-878-81	s	RES, CHIP 22 (1005)
R1862	1-220-878-81	s	RES, CHIP 22 (1005)
R1863	1-220-878-81	s	RES, CHIP 22 (1005)
R1864	1-220-878-81	s	RES, CHIP 22 (1005)
R1865	1-220-878-81	s	RES, CHIP 22 (1005)
R1866	1-220-878-81	s	RES, CHIP 22 (1005)
R1867	1-220-878-81	s	RES, CHIP 22 (1005)
R1868	1-220-878-81	s	RES, CHIP 22 (1005)
R1869	1-220-878-81	s	RES, CHIP 22 (1005)
R1870	1-220-878-81	s	RES, CHIP 22 (1005)
R1871	1-220-878-81	s	RES, CHIP 22 (1005)
R1872	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
R1932	1-220-878-81	s RES,	CHIP 22 (1005)
R1933	1-220-878-81	s RES,	CHIP 22 (1005)
R1934	1-220-878-81	s RES,	CHIP 22 (1005)
R1935	1-220-878-81	s RES,	CHIP 22 (1005)
R1936	1-220-878-81	s RES,	CHIP 22 (1005)
R1937	1-208-855-81	s RES,	CHIP 47 (1005)
R1938	1-208-855-81	s RES,	CHIP 47 (1005)
R1939	1-220-878-81	s RES,	CHIP 22 (1005)
R1940	1-220-878-81	s RES,	CHIP 22 (1005)
R1941	1-220-878-81	s RES,	CHIP 22 (1005)
R1942	1-220-878-81	s RES,	CHIP 22 (1005)
R1943	1-220-878-81	s RES,	CHIP 22 (1005)
R1944	1-220-878-81	s RES,	CHIP 22 (1005)
R1945	1-220-878-81	s RES,	CHIP 22 (1005)
R1946	1-220-878-81	s RES,	CHIP 22 (1005)
R1947	1-220-878-81	s RES,	CHIP 22 (1005)
R1948	1-220-878-81	s RES,	CHIP 22 (1005)
R1949	1-208-856-81	s RES,	CHIP 51 (1005)
R1950	1-208-856-81	s RES,	CHIP 51 (1005)
R1951	1-208-856-81	s RES,	CHIP 51 (1005)
R1952	1-208-856-81	s RES,	CHIP 51 (1005)
R1954	1-208-856-81	s RES,	CHIP 51 (1005)
R1955	1-208-856-81	s RES,	CHIP 51 (1005)
R1956	1-208-856-81	s RES,	CHIP 51 (1005)
R1957	1-208-856-81	s RES,	CHIP 51 (1005)
R1958	1-208-856-81	s RES,	CHIP 51 (1005)
R1959	1-208-856-81	s RES,	CHIP 51 (1005)
R1960	1-208-856-81	s RES,	CHIP 51 (1005)
R1961	1-208-856-81	s RES,	CHIP 51 (1005)
R1963	1-220-878-81	s RES,	CHIP 22 (1005)
R1964	1-220-878-81	s RES,	CHIP 22 (1005)
R1965	1-220-878-81	s RES,	CHIP 22 (1005)
R1966	1-220-878-81	s RES,	CHIP 22 (1005)
R1967	1-220-878-81	s RES,	CHIP 22 (1005)
R1968	1-220-878-81	s RES,	CHIP 22 (1005)
R1969	1-220-878-81	s RES,	CHIP 22 (1005)
R1970	1-208-856-81	s RES,	CHIP 51 (1005)
R1971	1-208-856-81	s RES,	CHIP 51 (1005)
R1972	1-208-856-81	s RES,	CHIP 51 (1005)
R1973	1-208-856-81	s RES,	CHIP 51 (1005)
R1974	1-208-856-81	s RES,	CHIP 51 (1005)
R1975	1-208-856-81	s RES,	CHIP 51 (1005)
R1976	1-208-856-81	s RES,	CHIP 51 (1005)
R1977	1-208-856-81	s RES,	CHIP 51 (1005)
R1978	1-208-856-81	s RES,	CHIP 51 (1005)
R1979	1-208-856-81	s RES,	CHIP 51 (1005)
R1980	1-208-856-81	s RES,	CHIP 51 (1005)
R1981	1-208-856-81	s RES,	CHIP 51 (1005)
R1982	1-208-856-81	s RES,	CHIP 51 (1005)
R1983	1-208-856-81	s RES,	CHIP 51 (1005)
R1984	1-208-856-81	s RES,	CHIP 51 (1005)
R1985	1-208-856-81	s RES,	CHIP 51 (1005)
R1986	1-208-935-81	s RES,	CHIP 100K (1005)
R1987	1-208-935-81	s RES,	CHIP 100K (1005)
R2001	1-220-878-81	s RES,	CHIP 22 (1005)
R2002	1-220-878-81	s RES,	CHIP 22 (1005)
R2003	1-220-878-81	s RES,	CHIP 22 (1005)
R2004	1-220-878-81	s RES,	CHIP 22 (1005)
R2005	1-220-878-81	s RES,	CHIP 22 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2006	1-220-878-81	s	RES, CHIP 22 (1005)
R2007	1-220-878-81	s	RES, CHIP 22 (1005)
R2008	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2009	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2100	1-208-875-81	s	RES, CHIP 330 (1005)
R2101	1-220-878-81	s	RES, CHIP 22 (1005)
R2105	1-208-903-81	s	RES, CHIP 4.7K (1005)
R2107	1-208-887-81	s	RES, CHIP 1.0K (1005)
R2110	1-220-878-81	s	RES, CHIP 22 (1005)
R2111	1-220-878-81	s	RES, CHIP 22 (1005)
R2112	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2113	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2114	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2115	1-208-927-81	s	RES, CHIP 47K (1005)
R2301	1-220-878-81	s	RES, CHIP 22 (1005)
R2302	1-220-878-81	s	RES, CHIP 22 (1005)
R2303	1-220-878-81	s	RES, CHIP 22 (1005)
R2304	1-220-878-81	s	RES, CHIP 22 (1005)
R2305	1-220-878-81	s	RES, CHIP 22 (1005)
R2306	1-220-878-81	s	RES, CHIP 22 (1005)
R2307	1-220-878-81	s	RES, CHIP 22 (1005)
R2308	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2309	1-220-878-81	s	RES, CHIP 22 (1005)
R2310	1-220-878-81	s	RES, CHIP 22 (1005)
R2400	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2401	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2404	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2405	1-208-935-81	s	RES, CHIP 100K (1005)
R2406	1-208-935-81	s	RES, CHIP 100K (1005)
R2409	1-208-935-81	s	RES, CHIP 100K (1005)
R2410	1-208-935-81	s	RES, CHIP 100K (1005)
R2411	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2419	1-220-870-81	s	RES, CHIP 10 (1005)
R2420	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2421	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2422	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2423	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2424	1-220-870-81	s	RES, CHIP 10 (1005)
R2425	1-220-870-81	s	RES, CHIP 10 (1005)
R2426	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2427	1-220-878-81	s	RES, CHIP 22 (1005)
R2428	1-220-878-81	s	RES, CHIP 22 (1005)
R2429	1-220-878-81	s	RES, CHIP 22 (1005)
R2430	1-220-878-81	s	RES, CHIP 22 (1005)
R2431	1-220-878-81	s	RES, CHIP 22 (1005)
R2432	1-220-878-81	s	RES, CHIP 22 (1005)
R2433	1-220-878-81	s	RES, CHIP 22 (1005)
R2434	1-220-878-81	s	RES, CHIP 22 (1005)
R2437	1-220-870-81	s	RES, CHIP 10 (1005)
R2440	1-208-855-81	s	RES, CHIP 47 (1005)
R2441	1-220-878-81	s	RES, CHIP 22 (1005)
R2442	1-220-878-81	s	RES, CHIP 22 (1005)
R2443	1-220-878-81	s	RES, CHIP 22 (1005)
R2444	1-220-878-81	s	RES, CHIP 22 (1005)
R2445	1-208-855-81	s	RES, CHIP 47 (1005)
R2446	1-220-878-81	s	RES, CHIP 22 (1005)
R2447	1-220-878-81	s	RES, CHIP 22 (1005)
R2448	1-220-878-81	s	RES, CHIP 22 (1005)
R2449	1-220-878-81	s	RES, CHIP 22 (1005)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
R2450	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R2451	1-208-935-81	s	RES, CHIP 100K (1005)
R2452	1-208-935-81	s	RES, CHIP 100K (1005)
R2455	1-208-855-81	s	RES, CHIP 47 (1005)
R2456	1-208-855-81	s	RES, CHIP 47 (1005)
R2457	1-208-855-81	s	RES, CHIP 47 (1005)
R2463	1-208-855-81	s	RES, CHIP 47 (1005)
R2464	1-208-855-81	s	RES, CHIP 47 (1005)
R2465	1-208-855-81	s	RES, CHIP 47 (1005)
R2466	1-220-878-81	s	RES, CHIP 22 (1005)
R2467	1-220-878-81	s	RES, CHIP 22 (1005)
R2468	1-208-855-81	s	RES, CHIP 47 (1005)
R2469	1-208-855-81	s	RES, CHIP 47 (1005)
R2470	1-220-878-81	s	RES, CHIP 22 (1005)
R2471	1-220-878-81	s	RES, CHIP 22 (1005)
R2472	1-220-878-81	s	RES, CHIP 22 (1005)
R2473	1-220-878-81	s	RES, CHIP 22 (1005)
R2474	1-220-870-81	s	RES, CHIP 10 (1005)
R2475	1-220-870-81	s	RES, CHIP 10 (1005)
R2476	1-220-878-81	s	RES, CHIP 22 (1005)
R2483	1-220-878-81	s	RES, CHIP 22 (1005)
R2484	1-220-878-81	s	RES, CHIP 22 (1005)
R2485	1-208-855-81	s	RES, CHIP 47 (1005)
R2486	1-208-855-81	s	RES, CHIP 47 (1005)
RB1	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB4	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB5	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB6	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB7	1-234-382-21	s	RES, NETWORK 220K (1005X4)
RB200	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB201	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB202	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB203	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB204	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB205	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB300	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB401	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB403	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB404	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB405	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB406	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB407	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB408	1-234-369-21	s	RES, NETWORK 10 (1005X4)
RB600	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB601	1-234-377-21	s	RES, NETWORK 4.7K (1005X4)
RB800	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB801	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB900	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB901	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB902	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB903	1-234-380-21	o	RES, NETWORK 47K (1005X4)
RB1000	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1001	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1002	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1003	1-234-378-21	s	RES, NETWORK 10K (1005X4)

(DVP-45 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
RB1013	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1014	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1200	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1207	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1208	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1400	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1401	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1407	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1408	1-234-369-21	s RES, NETWORK 10 (1005X4)
RB1602	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1603	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1604	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1605	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1606	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1607	1-234-382-21	s RES, NETWORK 220K (1005X4)
RB1608	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1609	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1700	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1701	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1702	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1703	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1704	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1705	1-242-963-21	s RES, NETWORK 33 (1005X4)
RB1706	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1707	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1708	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1709	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB1900	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB1901	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB2002	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB2003	1-234-373-21	s RES, NETWORK 220 (1005X4)
RB2100	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB2101	1-234-371-21	s RES, NETWORK 47 (1005X4)
RB2106	1-234-378-21	s RES, NETWORK 10K (1005X4)
S900	1-692-270-41	s SWITCH, SLIDE
S1900	1-692-270-41	s SWITCH, SLIDE
S1901	1-771-721-21	s SWITCH, TACTILE
X900	1-813-511-11	s OSCILLATOR, CRYSTAL (24MHZ)
X2400	1-813-823-11	s OSCILLATOR, CRYSTAL
X2401	1-813-824-11	s OSCILLATOR, CRYSTAL

ENC-118 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1550-453-A	s MOUNTED CIRCUIT BOARD, ENC-118
C1	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
C2	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
CN113	1-573-290-21	s PIN, CONNECTOR (1.5MM) (SMD)4P
EN1	1-467-973-21	s ENCODER, ROTARY

EX-1173 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1787-345-A	s MOUNTED CIRCUIT BOARD, EX-1173
R4	1-218-990-81	s CONDUCTOR, CHIP (1005)
R5	1-218-990-81	s CONDUCTOR, CHIP (1005)
R6	1-218-990-81	s CONDUCTOR, CHIP (1005)

FP-157 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1538-885-A	s	MOUNTED CIRCUIT BOARD, FP-157
BT1	1-756-076-21	s	HOLDER, LITHIUM BATTERY
C1	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C2	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C3	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C4	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C5	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C6	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C7	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C8	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C9	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C10	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C11	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C12	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C13	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C16	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C17	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C18	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C19	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C20	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C21	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C23	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C24	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C27	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C28	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C29	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C30	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C31	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C33	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C34	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C36	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C37	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C38	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C39	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C40	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C41	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C42	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C43	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C44	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C45	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C46	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C47	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C48	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C49	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C50	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C51	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C52	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C101	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C102	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C103	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C104	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C105	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C108	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C109	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C110	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C111	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C113	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C114	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C116	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C118	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C120	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C121	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C123	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C126	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C127	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C132	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C201	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C202	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C203	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C204	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C207	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C208	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C209	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C301	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C302	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C303	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C304	1-164-854-81	s	CAP, CHIP CERAMIC 15PF CH 1005
C305	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C306	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C307	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C308	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C309	1-126-390-21	s	CAP, CHIP ELECT 22MF (4X5.7)
C310	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C311	1-127-950-21	s	CAP, CHIP FILM 0.01MF (2012)
C312	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C313	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C314	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C315	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C316	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C317	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C318	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C319	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C320	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C321	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C322	1-112-863-91	s	CAP, CERAMIC 0.22MF B (1005)
C323	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C326	1-164-935-81	s	CAP, CHIP CERAMIC 470PF B 1005
C327	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C331	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C332	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C401	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C402	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C403	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C404	1-164-854-81	s CAP, CHIP CERAMIC 15PF CH 1005
C405	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C406	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C407	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C408	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C409	1-126-390-21	s CAP, CHIP ELECT 22MF (4X5.7)
C454	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C455	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C456	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C458	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C459	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C462	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C463	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C464	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C500	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C501	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C510	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C511	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C512	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C515	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C517	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C523	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C525	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C526	1-164-868-81	s CAP, CHIP CERAMIC 56PF CH 1005
C527	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C600	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C601	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
C603	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C604	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C607	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C608	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C609	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C610	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C612	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C614	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C615	1-164-868-81	s CAP, CHIP CERAMIC 56PF CH 1005
C616	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C618	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C619	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C620	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C621	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C622	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C701	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C702	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C705	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C706	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C707	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C708	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C709	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C710	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C711	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C712	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C713	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C714	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C715	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C716	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C717	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C718	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C719	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C720	1-128-590-21	s CAP, CHIP ELECT 100MF
C721	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C722	1-128-590-21	s CAP, CHIP ELECT 100MF
C723	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C724	1-128-590-21	s CAP, CHIP ELECT 100MF
C725	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C726	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C727	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C728	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C729	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C730	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C731	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C735	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C736	1-128-590-21	s CAP, CHIP ELECT 100MF
C737	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C738	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C739	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C740	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C741	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C742	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C743	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C744	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C745	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C746	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C747	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C748	1-100-415-91	s CAP, CHIP CERAMIC 0.47MF(1005)
C749	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C750	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C751	1-100-415-91	s CAP, CHIP CERAMIC 0.47MF(1005)
C752	1-128-590-21	s CAP, CHIP ELECT 100MF
C754	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C755	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C756	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C757	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C758	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C759	1-164-882-81	s CAP,CHIP CERAMIC 220PF CH 1005
C760	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C761	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C762	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C763	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C764	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C765	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C766	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C767	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C768	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C769	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C770	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C771	1-100-611-91	s CAP, CERAMIC 22MF C (2012)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C772	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C773	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C774	1-127-954-21	s	CAP, CHIP FILM 0.047MF (3216)
C775	1-128-590-21	s	CAP, CHIP ELECT 100MF
C776	1-128-590-21	s	CAP, CHIP ELECT 100MF
C777	1-128-590-21	s	CAP, CHIP ELECT 100MF
C778	1-128-590-21	s	CAP, CHIP ELECT 100MF
C779	1-128-590-21	s	CAP, CHIP ELECT 100MF
C780	1-128-590-21	s	CAP, CHIP ELECT 100MF
C781	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C782	1-112-746-91	s	CAP, CERAMIC 4.7MF B (1608)
C783	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C784	1-100-415-91	s	CAP, CHIP CERAMIC 0.47MF(1005)
C785	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C786	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C787	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C788	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C789	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C800	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C807	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C808	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C809	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C810	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C811	1-100-566-91	s	CAP, CHIP CERAMIC 0.1MF B 1608
C812	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C813	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C816	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C817	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C818	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C821	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C822	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-164-156-91	s	CAP, CHIP CERAMIC 0.1MF F 1608
C831	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C832	1-126-398-21	s	CAP, CHIP ELECT 4.7MF (4X5.7)
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C835	1-126-395-21	s	CAP, CHIP ELECT 22MF (5X5.7)
C836	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C841	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C842	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C843	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C844	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C845	1-114-236-21	s	CAP, CERAMIC 22MF B (3225)
C846	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C849	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C850	1-165-884-91	s	CAP, CERAMIC 2.2MF (1608)
C851	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C852	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C854	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C855	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C856	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C857	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C858	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C859	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C860	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C861	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C862	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C863	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C864	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C866	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C867	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C868	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C870	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C871	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C872	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C873	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C875	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C876	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C877	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C879	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C880	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C883	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C884	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C885	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C912	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C914	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C915	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C916	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C917	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C918	1-112-815-91	s	CAP, CERAMIC 10MF C (1608)
C919	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C920	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C921	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C922	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C923	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C924	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C925	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C926	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C927	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C928	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C929	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C930	1-112-298-91	o	CAP, CERAMIC 1MF B (1608)
C931	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C932	1-104-609-21	s	CAP, CHIP ELECT 100MF (4X5.7)
C933	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C934	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C935	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C936	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C937	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C938	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C939	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C940	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C941	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C942	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C943	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C944	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C945	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C947	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C948	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C999	1-112-815-91	s CAP, CERAMIC 10MF C (1608)
C1000	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1001	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1002	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN105	1-750-161-51	s CONNECTOR, FPC 30P
CN106	1-750-161-51	s CONNECTOR, FPC 30P
CN107	1-750-161-51	s CONNECTOR, FPC 30P
CN700	1-764-007-21	o PIN, CONNECTOR (SMD) 12P
CN701	1-569-775-21	o PIN, CONNECTOR (SMD) 5P
CN702	1-580-756-21	s PIN, CONNECTOR (SMD) 7P
CN703	1-580-055-21	o PIN, CONNECTOR (SMD) 2P
CN800	1-794-375-21	s PIN, CONNECTOR 2P
CN801	1-793-293-51	s CONNECTOR, FPC 12P
CN802	1-816-928-21	s PIN, CONNECTOR 22P
CN831	1-573-290-21	s PIN, CONNECTOR (1.5MM) (SMD) 4P
CN850	1-580-057-21	s PIN, CONNECTOR (SMD) 4P
D1	8-719-989-01	s DIODE DA221-TL
D2	8-719-989-01	s DIODE DA221-TL
D3	8-719-989-01	s DIODE DA221-TL
D4	8-719-989-01	s DIODE DA221-TL
D101	8-719-991-01	s DIODE DAP222-TL
D102	8-719-991-01	s DIODE DAP222-TL
D301	8-719-991-01	s DIODE DAP222-TL
D302	8-719-991-01	s DIODE DAP222-TL
D700	8-719-083-59	s DIODE UDZSNPTE-174.3B
D701	8-719-083-59	s DIODE UDZSNPTE-174.3B
D702	8-719-938-77	s DIODE SB05-05C-TB-E
D703	8-719-989-04	s DIODE DAN222-TL
D704	8-719-938-77	s DIODE SB05-05C-TB-E
D705	8-719-938-77	s DIODE SB05-05C-TB-E
D706	8-719-938-77	s DIODE SB05-05C-TB-E
D707	8-719-989-01	s DIODE DA221-TL
D708	8-719-938-77	s DIODE SB05-05C-TB-E
D709	8-719-938-77	s DIODE SB05-05C-TB-E
D710	8-719-938-77	s DIODE SB05-05C-TB-E
D830	8-719-017-33	s DIODE 02DZ20-TPH3
D831	8-719-938-77	s DIODE SB05-05C-TB-E
D832	8-719-938-77	s DIODE SB05-05C-TB-E
D833	8-719-938-77	s DIODE SB05-05C-TB-E
D834	8-719-938-77	s DIODE SB05-05C-TB-E
D835	8-719-938-77	s DIODE SB05-05C-TB-E
D836	8-719-938-77	s DIODE SB05-05C-TB-E
D837	8-719-938-77	s DIODE SB05-05C-TB-E
D838	8-719-938-77	s DIODE SB05-05C-TB-E

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D839	8-719-938-77	s DIODE SB05-05C-TB-E
D840	8-719-991-01	s DIODE DAP222-TL
D841	8-719-991-01	s DIODE DAP222-TL
D842	8-719-077-09	s DIODE CL-196HR-CD-T
D843	8-719-074-31	s DIODE CL-196YG-CD-T
D844	8-719-074-31	s DIODE CL-196YG-CD-T
D845	8-719-077-09	s DIODE CL-196HR-CD-T
D846	6-501-052-02	s DIODE CL-197HB1-D-T
D847	8-719-989-01	s DIODE DA221-TL
D848	8-719-989-01	s DIODE DA221-TL
D849	8-719-989-01	s DIODE DA221-TL
D912	8-719-991-01	s DIODE DAP222-TL
D913	8-719-991-01	s DIODE DAP222-TL
E450	1-535-757-21	s CHIP, CHECKER
E500	1-535-757-21	s CHIP, CHECKER
H801	6-600-513-11	s IC TK60019CS8G0L
IC1	8-759-523-01	s IC TC74HC4052AFT (EL)
IC2	8-759-523-01	s IC TC74HC4052AFT (EL)
IC3	8-759-523-01	s IC TC74HC4052AFT (EL)
IC4	8-759-523-01	s IC TC74HC4052AFT (EL)
IC5	8-759-144-75	s IC UPC4572G2-E2
IC6	8-759-144-75	s IC UPC4572G2-E2
IC7	8-759-327-01	s IC NJM062V (TE2)
IC8	8-759-523-01	s IC TC74HC4052AFT (EL)
IC101	8-759-144-75	s IC UPC4572G2-E2
IC102	8-759-697-17	s IC AK5383VF-E2
IC103	6-707-882-01	o IC TC74VHC74FT (EKJ)
IC201	8-759-144-75	s IC UPC4572G2-E2
IC301	8-759-144-75	s IC UPC4572G2-E2
IC302	8-759-697-17	s IC AK5383VF-E2
IC401	8-759-144-75	s IC UPC4572G2-E2
IC451	8-759-549-15	s IC SN74LV245APWR
IC453	6-701-111-01	s IC AK4382AVT-E2
IC454	6-706-481-01	s IC TC7SET32FU (T5RSOJF)
IC455	6-706-481-01	s IC TC7SET32FU (T5RSOJF)
IC456	6-706-481-01	s IC TC7SET32FU (T5RSOJF)
IC460	8-759-698-31	s IC TC7WH74FK (TE85R)
IC461	8-759-680-48	s IC TC7WH157FK (TE85R)
IC520	8-759-422-21	s IC NJM4580V (TE2)
IC521	8-759-422-21	s IC NJM4580V (TE2)
IC620	8-759-422-21	s IC NJM4580V (TE2)
IC621	8-759-422-21	s IC NJM4580V (TE2)
IC622	6-701-716-01	s IC M5203AFP600D
IC701	6-702-481-01	s IC PCA9555DB-118
IC702	8-759-185-42	s IC LM4040AIM3-2.5
IC703	8-759-669-73	s IC TL082CPWR
IC704	8-759-523-01	s IC TC74HC4052AFT (EL)
IC705	8-759-523-01	s IC TC74HC4052AFT (EL)
IC706	6-704-960-01	s IC NJM2172V (TE2)
IC707	6-704-960-01	s IC NJM2172V (TE2)
IC708	8-759-431-97	s IC NJM386M (TE2)
IC709	8-759-431-97	s IC NJM386M (TE2)
IC710	8-759-431-97	s IC NJM386M (TE2)
IC711	6-707-083-01	s IC TK70008SCL-G
IC750	8-759-422-21	s IC NJM4580V (TE2)
IC800	6-706-481-01	s IC TC7SET32FU (T5RSOJF)
IC801	6-706-481-01	s IC TC7SET32FU (T5RSOJF)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC802	6-706-481-01	s	IC TC7SET32FU (T5RSOJF)
IC803	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC804	6-706-481-01	s	IC TC7SET32FU (T5RSOJF)
IC805	6-706-481-01	s	IC TC7SET32FU (T5RSOJF)
IC806	6-704-440-01	s	IC UPD7225GB-3B7-A
IC807	8-759-185-42	s	IC LM4040AIM3-2.5
IC808	8-759-327-01	s	IC NJM062V (TE2)
IC809	8-759-444-93	s	IC RH5RL33AA-T1-FA
IC812	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC813	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC814	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC815	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC816	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC830	6-711-555-01	o	IC NJM2831F08 (TE1)
IC831	8-759-477-41	s	IC RH5RL53AA-T1-FA
IC832	8-759-442-54	s	IC RH5RL50AA-T1-FA
IC833	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC834	8-759-444-93	s	IC RH5RL33AA-T1-FA
IC835	6-704-238-01	s	IC S-812C30AUA-C2KT2G
IC836	8-759-444-93	s	IC RH5RL33AA-T1-FA
IC837	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC838	8-759-337-40	s	IC NJM2904V (TE2)
IC839	8-759-598-35	s	IC NJM2119M (TE2)
IC840	8-759-337-40	s	IC NJM2904V (TE2)
IC842	8-759-349-55	s	IC RH5VL25AA-T1-FA
IC843	8-759-669-69	s	IC TLC7733IPWR-12
IC844	8-759-337-40	s	IC NJM2904V (TE2)
IC845	6-711-555-01	o	IC NJM2831F08 (TE1)
IC847	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC848	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC849	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC850	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC851	6-706-481-01	s	IC TC7SET32FU (T5RSOJF)
IC852	6-707-882-01	o	IC TC74VHC74FT (EKJ)
IC908	6-708-478-01	s	IC RX-8025NB
IC913	6-710-018-01	s	IC CAT24C02WI-GT3
IC914	8-759-337-40	s	IC NJM2904V (TE2)
IC916	6-704-910-01	s	IC PCA9564PW/G.118
IC917	6-704-910-01	s	IC PCA9564PW/G.118
IC918	6-704-910-01	s	IC PCA9564PW/G.118
IC919	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC920	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC922	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC923	6-702-481-01	s	IC PCA9555DB-118
IC924	6-702-481-01	s	IC PCA9555DB-118
IC925	6-706-481-01	s	IC TC7SET32FU (T5RSOJF)
IC926	6-707-868-01	s	IC TC74VHC138FT (EKJ)
IC927	8-759-675-54	s	IC TC7W53FK (TE85R)
IC928	8-759-675-54	s	IC TC7W53FK (TE85R)
IC1000	8-759-655-22	s	IC TC7WH34FK (TE85R)
L701	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L702	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L703	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L704	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L800	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L801	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L802	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L803	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L804	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L830	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L831	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L832	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L999	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1000	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1001	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
L1002	1-469-549-21	s	INDUCTOR, CHIP 1.0UH (LB2016)
ND800	1-805-945-11	s	PANEL, LCD
Q101	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q102	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q103	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q104	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q105	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q106	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q107	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q201	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q202	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q204	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q301	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q302	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q303	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q304	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q305	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q306	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q307	8-729-054-99	s	TRANSISTOR SI4559EY-T1
Q401	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q402	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q404	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q503	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q504	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q505	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q603	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q604	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q605	8-729-013-28	s	TRANSISTOR HN1B01FU-TE85R
Q700	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q701	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q702	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q703	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q704	8-729-928-55	s	TRANSISTOR DTA123JE-TL
Q705	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q706	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q707	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q708	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q709	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q710	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q711	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q712	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q713	6-551-041-01	s	TRANSISTOR RN4904 (T5RSOY, D, F)
Q714	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q715	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q716	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q717	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q718	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q720	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q721	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q722	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q723	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L
Q724	8-729-013-37	s	TRANSISTOR 2SC4213-AB-TE85L

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q800	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q801	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q802	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q803	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q829	6-550-832-01	s TRANSISTOR SI2301BDS-T1
Q830	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q831	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q832	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q833	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q834	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q835	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q836	6-550-832-01	s TRANSISTOR SI2301BDS-T1
Q837	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q838	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q839	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q840	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q841	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q842	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q843	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q844	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q847	6-551-526-01	o TRANSISTOR RJU003N03T1
Q848	6-551-526-01	o TRANSISTOR RJU003N03T1
Q910	6-551-266-01	s TRANSISTOR SI2304BDS-T1
Q911	6-551-266-01	s TRANSISTOR SI2304BDS-T1
Q912	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q913	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q914	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q915	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q916	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q917	8-729-929-09	s TRANSISTOR DTC123JE-TL
R1	1-208-935-81	s RES, CHIP 100K (1005)
R2	1-208-935-81	s RES, CHIP 100K (1005)
R3	1-208-935-81	s RES, CHIP 100K (1005)
R4	1-208-935-81	s RES, CHIP 100K (1005)
R5	1-208-935-81	s RES, CHIP 100K (1005)
R6	1-208-935-81	s RES, CHIP 100K (1005)
R7	1-208-935-81	s RES, CHIP 100K (1005)
R8	1-208-935-81	s RES, CHIP 100K (1005)
R9	1-208-935-81	s RES, CHIP 100K (1005)
R10	1-208-935-81	s RES, CHIP 100K (1005)
R11	1-208-911-81	s RES, CHIP 10K (1005)
R12	1-208-939-81	s RES, CHIP 150K (1005)
R13	1-208-903-81	s RES, CHIP 4.7K (1005)
R14	1-208-911-81	s RES, CHIP 10K (1005)
R15	1-208-895-81	s RES, CHIP 2.2K (1005)
R16	1-208-895-81	s RES, CHIP 2.2K (1005)
R17	1-208-895-81	s RES, CHIP 2.2K (1005)
R18	1-208-895-81	s RES, CHIP 2.2K (1005)
R19	1-208-895-81	s RES, CHIP 2.2K (1005)
R20	1-208-895-81	s RES, CHIP 2.2K (1005)
R21	1-208-895-81	s RES, CHIP 2.2K (1005)
R22	1-208-895-81	s RES, CHIP 2.2K (1005)
R23	1-208-931-81	s RES, CHIP 68K (1005)
R24	1-208-931-81	s RES, CHIP 68K (1005)
R25	1-208-931-81	s RES, CHIP 68K (1005)
R26	1-208-931-81	s RES, CHIP 68K (1005)
R27	1-208-895-81	s RES, CHIP 2.2K (1005)
R28	1-208-895-81	s RES, CHIP 2.2K (1005)
R29	1-208-895-81	s RES, CHIP 2.2K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R30	1-208-895-81	s RES, CHIP 2.2K (1005)
R31	1-208-895-81	s RES, CHIP 2.2K (1005)
R32	1-208-911-81	s RES, CHIP 10K (1005)
R33	1-208-895-81	s RES, CHIP 2.2K (1005)
R34	1-208-931-81	s RES, CHIP 68K (1005)
R35	1-208-863-81	s RES, CHIP 100 (1005)
R36	1-208-895-81	s RES, CHIP 2.2K (1005)
R37	1-208-931-81	s RES, CHIP 68K (1005)
R38	1-208-895-81	s RES, CHIP 2.2K (1005)
R39	1-208-931-81	s RES, CHIP 68K (1005)
R40	1-208-895-81	s RES, CHIP 2.2K (1005)
R41	1-208-931-81	s RES, CHIP 68K (1005)
R42	1-208-919-81	s RES, CHIP 22K (1005)
R43	1-208-919-81	s RES, CHIP 22K (1005)
R44	1-208-919-81	s RES, CHIP 22K (1005)
R45	1-208-919-81	s RES, CHIP 22K (1005)
R46	1-208-887-81	s RES, CHIP 1.0K (1005)
R47	1-208-911-81	s RES, CHIP 10K (1005)
R48	1-208-903-81	s RES, CHIP 4.7K (1005)
R49	1-208-911-81	s RES, CHIP 10K (1005)
R50	1-208-903-81	s RES, CHIP 4.7K (1005)
R51	1-208-911-81	s RES, CHIP 10K (1005)
R52	1-208-903-81	s RES, CHIP 4.7K (1005)
R53	1-208-911-81	s RES, CHIP 10K (1005)
R54	1-208-903-81	s RES, CHIP 4.7K (1005)
R55	1-208-911-81	s RES, CHIP 10K (1005)
R56	1-208-911-81	s RES, CHIP 10K (1005)
R57	1-208-911-81	s RES, CHIP 10K (1005)
R58	1-208-911-81	s RES, CHIP 10K (1005)
R59	1-208-911-81	s RES, CHIP 10K (1005)
R60	1-208-903-81	s RES, CHIP 4.7K (1005)
R61	1-208-911-81	s RES, CHIP 10K (1005)
R62	1-208-903-81	s RES, CHIP 4.7K (1005)
R63	1-208-863-81	s RES, CHIP 100 (1005)
R64	1-208-863-81	s RES, CHIP 100 (1005)
R65	1-208-863-81	s RES, CHIP 100 (1005)
R66	1-208-863-81	s RES, CHIP 100 (1005)
R69	1-208-935-81	s RES, CHIP 100K (1005)
R70	1-208-935-81	s RES, CHIP 100K (1005)
R103	1-208-911-81	s RES, CHIP 10K (1005)
R104	1-208-903-81	s RES, CHIP 4.7K (1005)
R106	1-208-903-81	s RES, CHIP 4.7K (1005)
R107	1-220-878-81	s RES, CHIP 22 (1005)
R109	1-208-911-81	s RES, CHIP 10K (1005)
R110	1-208-927-81	s RES, CHIP 47K (1005)
R112	1-208-911-81	s RES, CHIP 10K (1005)
R113	1-208-899-81	s RES, CHIP 3.3K (1005)
R114	1-208-903-81	s RES, CHIP 4.7K (1005)
R115	1-208-911-81	s RES, CHIP 10K (1005)
R116	1-208-927-81	s RES, CHIP 47K (1005)
R124	1-208-911-81	s RES, CHIP 10K (1005)
R125	1-208-927-81	s RES, CHIP 47K (1005)
R126	1-220-878-81	s RES, CHIP 22 (1005)
R127	1-208-911-81	s RES, CHIP 10K (1005)
R128	1-208-927-81	s RES, CHIP 47K (1005)
R132	1-208-895-81	s RES, CHIP 2.2K (1005)
R134	1-208-895-81	s RES, CHIP 2.2K (1005)
R135	1-208-919-81	s RES, CHIP 22K (1005)
R136	1-208-919-81	s RES, CHIP 22K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R137	1-208-927-81	s RES, CHIP 47K (1005)
R138	1-208-927-81	s RES, CHIP 47K (1005)
R139	1-220-878-81	s RES, CHIP 22 (1005)
R140	1-220-878-81	s RES, CHIP 22 (1005)
R141	1-208-935-81	s RES, CHIP 100K (1005)
R142	1-220-878-81	s RES, CHIP 22 (1005)
R143	1-220-878-81	s RES, CHIP 22 (1005)
R144	1-208-935-81	s RES, CHIP 100K (1005)
R145	1-208-927-81	s RES, CHIP 47K (1005)
R146	1-208-911-81	s RES, CHIP 10K (1005)
R147	1-208-911-81	s RES, CHIP 10K (1005)
R148	1-208-927-81	s RES, CHIP 47K (1005)
R203	1-208-911-81	s RES, CHIP 10K (1005)
R204	1-208-903-81	s RES, CHIP 4.7K (1005)
R206	1-208-903-81	s RES, CHIP 4.7K (1005)
R207	1-220-878-81	s RES, CHIP 22 (1005)
R209	1-208-911-81	s RES, CHIP 10K (1005)
R210	1-208-927-81	s RES, CHIP 47K (1005)
R212	1-208-911-81	s RES, CHIP 10K (1005)
R213	1-208-899-81	s RES, CHIP 3.3K (1005)
R214	1-208-903-81	s RES, CHIP 4.7K (1005)
R215	1-208-911-81	s RES, CHIP 10K (1005)
R216	1-208-927-81	s RES, CHIP 47K (1005)
R224	1-208-911-81	s RES, CHIP 10K (1005)
R225	1-208-927-81	s RES, CHIP 47K (1005)
R226	1-220-878-81	s RES, CHIP 22 (1005)
R227	1-208-911-81	s RES, CHIP 10K (1005)
R228	1-208-927-81	s RES, CHIP 47K (1005)
R232	1-208-895-81	s RES, CHIP 2.2K (1005)
R234	1-208-895-81	s RES, CHIP 2.2K (1005)
R235	1-208-919-81	s RES, CHIP 22K (1005)
R236	1-208-919-81	s RES, CHIP 22K (1005)
R237	1-208-927-81	s RES, CHIP 47K (1005)
R238	1-208-927-81	s RES, CHIP 47K (1005)
R239	1-220-878-81	s RES, CHIP 22 (1005)
R240	1-220-878-81	s RES, CHIP 22 (1005)
R303	1-208-911-81	s RES, CHIP 10K (1005)
R304	1-208-903-81	s RES, CHIP 4.7K (1005)
R306	1-208-903-81	s RES, CHIP 4.7K (1005)
R307	1-220-878-81	s RES, CHIP 22 (1005)
R309	1-208-911-81	s RES, CHIP 10K (1005)
R310	1-208-927-81	s RES, CHIP 47K (1005)
R312	1-208-911-81	s RES, CHIP 10K (1005)
R313	1-208-899-81	s RES, CHIP 3.3K (1005)
R314	1-208-903-81	s RES, CHIP 4.7K (1005)
R315	1-208-911-81	s RES, CHIP 10K (1005)
R316	1-208-927-81	s RES, CHIP 47K (1005)
R324	1-208-911-81	s RES, CHIP 10K (1005)
R325	1-208-927-81	s RES, CHIP 47K (1005)
R326	1-220-878-81	s RES, CHIP 22 (1005)
R327	1-208-911-81	s RES, CHIP 10K (1005)
R328	1-208-927-81	s RES, CHIP 47K (1005)
R332	1-208-895-81	s RES, CHIP 2.2K (1005)
R334	1-208-895-81	s RES, CHIP 2.2K (1005)
R335	1-208-919-81	s RES, CHIP 22K (1005)
R336	1-208-919-81	s RES, CHIP 22K (1005)
R337	1-208-927-81	s RES, CHIP 47K (1005)
R338	1-208-927-81	s RES, CHIP 47K (1005)
R339	1-220-878-81	s RES, CHIP 22 (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R340	1-220-878-81	s RES, CHIP 22 (1005)
R341	1-208-935-81	s RES, CHIP 100K (1005)
R342	1-220-878-81	s RES, CHIP 22 (1005)
R343	1-220-878-81	s RES, CHIP 22 (1005)
R344	1-208-935-81	s RES, CHIP 100K (1005)
R345	1-208-927-81	s RES, CHIP 47K (1005)
R346	1-208-911-81	s RES, CHIP 10K (1005)
R347	1-208-911-81	s RES, CHIP 10K (1005)
R348	1-208-927-81	s RES, CHIP 47K (1005)
R403	1-208-911-81	s RES, CHIP 10K (1005)
R404	1-208-903-81	s RES, CHIP 4.7K (1005)
R406	1-208-903-81	s RES, CHIP 4.7K (1005)
R407	1-220-878-81	s RES, CHIP 22 (1005)
R409	1-208-911-81	s RES, CHIP 10K (1005)
R410	1-208-927-81	s RES, CHIP 47K (1005)
R412	1-208-911-81	s RES, CHIP 10K (1005)
R413	1-208-899-81	s RES, CHIP 3.3K (1005)
R414	1-208-903-81	s RES, CHIP 4.7K (1005)
R415	1-208-911-81	s RES, CHIP 10K (1005)
R416	1-208-927-81	s RES, CHIP 47K (1005)
R424	1-208-911-81	s RES, CHIP 10K (1005)
R425	1-208-927-81	s RES, CHIP 47K (1005)
R426	1-220-878-81	s RES, CHIP 22 (1005)
R427	1-208-911-81	s RES, CHIP 10K (1005)
R428	1-208-927-81	s RES, CHIP 47K (1005)
R430	1-208-895-81	s RES, CHIP 2.2K (1005)
R431	1-208-895-81	s RES, CHIP 2.2K (1005)
R432	1-208-895-81	s RES, CHIP 2.2K (1005)
R433	1-208-899-81	s RES, CHIP 3.3K (1005)
R434	1-208-895-81	s RES, CHIP 2.2K (1005)
R435	1-208-919-81	s RES, CHIP 22K (1005)
R436	1-208-919-81	s RES, CHIP 22K (1005)
R437	1-208-927-81	s RES, CHIP 47K (1005)
R438	1-208-927-81	s RES, CHIP 47K (1005)
R439	1-220-878-81	s RES, CHIP 22 (1005)
R440	1-220-878-81	s RES, CHIP 22 (1005)
R441	1-208-895-81	s RES, CHIP 2.2K (1005)
R442	1-208-895-81	s RES, CHIP 2.2K (1005)
R444	1-208-899-81	s RES, CHIP 3.3K (1005)
R446	1-208-899-81	s RES, CHIP 3.3K (1005)
R448	1-208-899-81	s RES, CHIP 3.3K (1005)
R451	1-208-935-81	s RES, CHIP 100K (1005)
R452	1-208-935-81	s RES, CHIP 100K (1005)
R454	1-208-919-81	s RES, CHIP 22K (1005)
R457	1-208-919-81	s RES, CHIP 22K (1005)
R459	1-208-919-81	s RES, CHIP 22K (1005)
R461	1-220-878-81	s RES, CHIP 22 (1005)
R462	1-220-878-81	s RES, CHIP 22 (1005)
R464	1-208-919-81	s RES, CHIP 22K (1005)
R465	1-208-935-81	s RES, CHIP 100K (1005)
R466	1-208-919-81	s RES, CHIP 22K (1005)
R467	1-208-943-81	s RES, CHIP 220K (1005)
R500	1-208-891-81	s RES, CHIP 1.5K (1005)
R501	1-208-887-81	s RES, CHIP 1.0K (1005)
R502	1-208-891-81	s RES, CHIP 1.5K (1005)
R503	1-208-887-81	s RES, CHIP 1.0K (1005)
R504	1-208-883-81	s RES, CHIP 680 (1005)
R505	1-218-990-81	s CONDUCTOR, CHIP (1005)
R506	1-208-899-81	s RES, CHIP 3.3K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R507	1-218-990-81	s CONDUCTOR, CHIP (1005)
R508	1-208-883-81	s RES, CHIP 680 (1005)
R510	1-208-899-81	s RES, CHIP 3.3K (1005)
R511	1-208-899-81	s RES, CHIP 3.3K (1005)
R512	1-208-895-81	s RES, CHIP 2.2K (1005)
R513	1-208-887-81	s RES, CHIP 1.0K (1005)
R514	1-208-887-81	s RES, CHIP 1.0K (1005)
R515	1-208-887-81	s RES, CHIP 1.0K (1005)
R516	1-208-887-81	s RES, CHIP 1.0K (1005)
R517	1-208-899-81	s RES, CHIP 3.3K (1005)
R518	1-208-895-81	s RES, CHIP 2.2K (1005)
R519	1-208-895-81	s RES, CHIP 2.2K (1005)
R520	1-220-882-81	s RES, CHIP 33 (1005)
R521	1-220-882-81	s RES, CHIP 33 (1005)
R522	1-220-882-81	s RES, CHIP 33 (1005)
R523	1-220-882-81	s RES, CHIP 33 (1005)
R524	1-220-882-81	s RES, CHIP 33 (1005)
R525	1-220-882-81	s RES, CHIP 33 (1005)
R526	1-220-882-81	s RES, CHIP 33 (1005)
R527	1-220-882-81	s RES, CHIP 33 (1005)
R539	1-208-911-81	s RES, CHIP 10K (1005)
R540	1-208-891-81	s RES, CHIP 1.5K (1005)
R541	1-208-891-81	s RES, CHIP 1.5K (1005)
R542	1-220-882-81	s RES, CHIP 33 (1005)
R543	1-208-911-81	s RES, CHIP 10K (1005)
R544	1-208-875-81	s RES, CHIP 330 (1005)
R545	1-220-878-81	s RES, CHIP 22 (1005)
R546	1-208-911-81	s RES, CHIP 10K (1005)
R547	1-208-927-81	s RES, CHIP 47K (1005)
R548	1-208-911-81	s RES, CHIP 10K (1005)
R549	1-208-891-81	s RES, CHIP 1.5K (1005)
R550	1-208-891-81	s RES, CHIP 1.5K (1005)
R551	1-220-870-81	s RES, CHIP 10 (1005)
R552	1-208-911-81	s RES, CHIP 10K (1005)
R553	1-208-927-81	s RES, CHIP 47K (1005)
R554	1-208-911-81	s RES, CHIP 10K (1005)
R555	1-208-911-81	s RES, CHIP 10K (1005)
R556	1-208-927-81	s RES, CHIP 47K (1005)
R557	1-208-887-81	s RES, CHIP 1.0K (1005)
R558	1-208-887-81	s RES, CHIP 1.0K (1005)
R559	1-208-891-81	s RES, CHIP 1.5K (1005)
R560	1-208-907-81	s RES, CHIP 6.8K (1005)
R561	1-208-887-81	s RES, CHIP 1.0K (1005)
R562	1-220-882-81	s RES, CHIP 33 (1005)
R563	1-208-903-81	s RES, CHIP 4.7K (1005)
R564	1-208-871-81	s RES, CHIP 220 (1005)
R565	1-208-875-81	s RES, CHIP 330 (1005)
R566	1-208-903-81	s RES, CHIP 4.7K (1005)
R567	1-208-887-81	s RES, CHIP 1.0K (1005)
R568	1-208-887-81	s RES, CHIP 1.0K (1005)
R569	1-208-887-81	s RES, CHIP 1.0K (1005)
R602	1-208-891-81	s RES, CHIP 1.5K (1005)
R603	1-208-887-81	s RES, CHIP 1.0K (1005)
R604	1-208-899-81	s RES, CHIP 3.3K (1005)
R605	1-208-899-81	s RES, CHIP 3.3K (1005)
R606	1-208-899-81	s RES, CHIP 3.3K (1005)
R607	1-208-895-81	s RES, CHIP 2.2K (1005)
R608	1-208-887-81	s RES, CHIP 1.0K (1005)
R609	1-208-887-81	s RES, CHIP 1.0K (1005)
R610	1-208-887-81	s RES, CHIP 1.0K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R611	1-208-887-81	s RES, CHIP 1.0K (1005)
R612	1-208-899-81	s RES, CHIP 3.3K (1005)
R613	1-208-895-81	s RES, CHIP 2.2K (1005)
R614	1-208-895-81	s RES, CHIP 2.2K (1005)
R634	1-208-911-81	s RES, CHIP 10K (1005)
R635	1-208-891-81	s RES, CHIP 1.5K (1005)
R636	1-208-891-81	s RES, CHIP 1.5K (1005)
R637	1-208-911-81	s RES, CHIP 10K (1005)
R638	1-220-882-81	s RES, CHIP 33 (1005)
R639	1-208-875-81	s RES, CHIP 330 (1005)
R640	1-220-878-81	s RES, CHIP 22 (1005)
R641	1-208-911-81	s RES, CHIP 10K (1005)
R642	1-208-927-81	s RES, CHIP 47K (1005)
R643	1-208-911-81	s RES, CHIP 10K (1005)
R644	1-208-891-81	s RES, CHIP 1.5K (1005)
R645	1-208-891-81	s RES, CHIP 1.5K (1005)
R646	1-220-870-81	s RES, CHIP 10 (1005)
R647	1-208-911-81	s RES, CHIP 10K (1005)
R648	1-208-927-81	s RES, CHIP 47K (1005)
R649	1-208-911-81	s RES, CHIP 10K (1005)
R650	1-208-911-81	s RES, CHIP 10K (1005)
R651	1-208-927-81	s RES, CHIP 47K (1005)
R652	1-208-887-81	s RES, CHIP 1.0K (1005)
R653	1-208-887-81	s RES, CHIP 1.0K (1005)
R654	1-208-891-81	s RES, CHIP 1.5K (1005)
R655	1-208-907-81	s RES, CHIP 6.8K (1005)
R656	1-208-887-81	s RES, CHIP 1.0K (1005)
R657	1-220-882-81	s RES, CHIP 33 (1005)
R658	1-208-903-81	s RES, CHIP 4.7K (1005)
R659	1-208-871-81	s RES, CHIP 220 (1005)
R660	1-208-875-81	s RES, CHIP 330 (1005)
R661	1-208-903-81	s RES, CHIP 4.7K (1005)
R662	1-220-878-81	s RES, CHIP 22 (1005)
R663	1-220-878-81	s RES, CHIP 22 (1005)
R664	1-220-878-81	s RES, CHIP 22 (1005)
R665	1-208-883-81	s RES, CHIP 680 (1005)
R666	1-218-990-81	s CONDUCTOR, CHIP (1005)
R667	1-218-990-81	s CONDUCTOR, CHIP (1005)
R668	1-208-883-81	s RES, CHIP 680 (1005)
R669	1-208-895-81	s RES, CHIP 2.2K (1005)
R670	1-208-935-81	s RES, CHIP 100K (1005)
R671	1-208-895-81	s RES, CHIP 2.2K (1005)
R700	1-208-935-81	s RES, CHIP 100K (1005)
R701	1-208-935-81	s RES, CHIP 100K (1005)
R702	1-208-927-81	s RES, CHIP 47K (1005)
R703	1-208-903-81	s RES, CHIP 4.7K (1005)
R704	1-208-887-81	s RES, CHIP 1.0K (1005)
R705	1-208-919-81	s RES, CHIP 22K (1005)
R706	1-208-911-81	s RES, CHIP 10K (1005)
R707	1-208-915-81	s RES, CHIP 15K (1005)
R708	1-208-903-81	s RES, CHIP 4.7K (1005)
R709	1-208-935-81	s RES, CHIP 100K (1005)
R710	1-208-935-81	s RES, CHIP 100K (1005)
R711	1-208-927-81	s RES, CHIP 47K (1005)
R712	1-208-911-81	s RES, CHIP 10K (1005)
R713	1-208-903-81	s RES, CHIP 4.7K (1005)
R714	1-208-911-81	s RES, CHIP 10K (1005)
R715	1-208-863-81	s RES, CHIP 100 (1005)
R718	1-208-935-81	s RES, CHIP 100K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R719	1-208-871-81 s	RES, CHIP 220 (1005)
R720	1-208-887-81 s	RES, CHIP 1.0K (1005)
R721	1-208-887-81 s	RES, CHIP 1.0K (1005)
R722	1-208-927-81 s	RES, CHIP 47K (1005)
R723	1-208-927-81 s	RES, CHIP 47K (1005)
R724	1-208-899-81 s	RES, CHIP 3.3K (1005)
R725	1-208-935-81 s	RES, CHIP 100K (1005)
R726	1-208-911-81 s	RES, CHIP 10K (1005)
R727	1-208-903-81 s	RES, CHIP 4.7K (1005)
R728	1-208-903-81 s	RES, CHIP 4.7K (1005)
R729	1-208-919-81 s	RES, CHIP 22K (1005)
R730	1-208-903-81 s	RES, CHIP 4.7K (1005)
R731	1-208-903-81 s	RES, CHIP 4.7K (1005)
R732	1-208-911-81 s	RES, CHIP 10K (1005)
R733	1-208-895-81 s	RES, CHIP 2.2K (1005)
R734	1-208-895-81 s	RES, CHIP 2.2K (1005)
R735	1-208-935-81 s	RES, CHIP 100K (1005)
R736	1-208-863-81 s	RES, CHIP 100 (1005)
R737	1-208-895-81 s	RES, CHIP 2.2K (1005)
R738	1-208-903-81 s	RES, CHIP 4.7K (1005)
R740	1-208-863-81 s	RES, CHIP 100 (1005)
R741	1-208-863-81 s	RES, CHIP 100 (1005)
R742	1-208-863-81 s	RES, CHIP 100 (1005)
R743	1-208-895-81 s	RES, CHIP 2.2K (1005)
R744	1-208-895-81 s	RES, CHIP 2.2K (1005)
R745	1-208-895-81 s	RES, CHIP 2.2K (1005)
R746	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R747	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R749	1-208-911-81 s	RES, CHIP 10K (1005)
R750	1-208-911-81 s	RES, CHIP 10K (1005)
R751	1-208-911-81 s	RES, CHIP 10K (1005)
R752	1-208-911-81 s	RES, CHIP 10K (1005)
R753	1-208-915-81 s	RES, CHIP 15K (1005)
R754	1-208-863-81 s	RES, CHIP 100 (1005)
R755	1-208-895-81 s	RES, CHIP 2.2K (1005)
R756	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R757	1-208-927-81 s	RES, CHIP 47K (1005)
R758	1-208-895-81 s	RES, CHIP 2.2K (1005)
R760	1-208-887-81 s	RES, CHIP 1.0K (1005)
R761	1-208-899-81 s	RES, CHIP 3.3K (1005)
R763	1-208-915-81 s	RES, CHIP 15K (1005)
R764	1-208-887-81 s	RES, CHIP 1.0K (1005)
R765	1-208-895-81 s	RES, CHIP 2.2K (1005)
R766	1-208-915-81 s	RES, CHIP 15K (1005)
R767	1-208-895-81 s	RES, CHIP 2.2K (1005)
R768	1-208-915-81 s	RES, CHIP 15K (1005)
R769	1-208-895-81 s	RES, CHIP 2.2K (1005)
R770	1-208-915-81 s	RES, CHIP 15K (1005)
R771	1-208-903-81 s	RES, CHIP 4.7K (1005)
R772	1-208-903-81 s	RES, CHIP 4.7K (1005)
R773	1-208-903-81 s	RES, CHIP 4.7K (1005)
R774	1-208-935-81 s	RES, CHIP 100K (1005)
R775	1-208-935-81 s	RES, CHIP 100K (1005)
R776	1-220-870-81 s	RES, CHIP 10 (1005)
R777	1-220-870-81 s	RES, CHIP 10 (1005)
R778	1-220-870-81 s	RES, CHIP 10 (1005)
R779	1-208-935-81 s	RES, CHIP 100K (1005)
R780	1-208-935-81 s	RES, CHIP 100K (1005)
R781	1-208-935-81 s	RES, CHIP 100K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R782	1-208-935-81 s	RES, CHIP 100K (1005)
R783	1-208-887-81 s	RES, CHIP 1.0K (1005)
R784	1-208-947-81 s	RES, CHIP 330K (1005)
R785	1-208-911-81 s	RES, CHIP 10K (1005)
R786	1-208-887-81 s	RES, CHIP 1.0K (1005)
R787	1-208-887-81 s	RES, CHIP 1.0K (1005)
R788	1-208-927-81 s	RES, CHIP 47K (1005)
R789	1-208-887-81 s	RES, CHIP 1.0K (1005)
R790	1-220-874-81 s	RES, CHIP 15 (1005)
R791	1-220-882-81 s	RES, CHIP 33 (1005)
R792	1-208-867-81 s	RES, CHIP 150 (1005)
R793	1-208-875-81 s	RES, CHIP 330 (1005)
R794	1-208-871-81 s	RES, CHIP 220 (1005)
R795	1-220-870-81 s	RES, CHIP 10 (1005)
R796	1-208-903-81 s	RES, CHIP 4.7K (1005)
R797	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R798	1-208-903-81 s	RES, CHIP 4.7K (1005)
R800	1-208-903-81 s	RES, CHIP 4.7K (1005)
R801	1-208-903-81 s	RES, CHIP 4.7K (1005)
R802	1-208-903-81 s	RES, CHIP 4.7K (1005)
R803	1-208-935-81 s	RES, CHIP 100K (1005)
R804	1-208-935-81 s	RES, CHIP 100K (1005)
R805	1-208-939-81 s	RES, CHIP 150K (1005)
R806	1-208-939-81 s	RES, CHIP 150K (1005)
R807	1-208-943-81 s	RES, CHIP 220K (1005)
R808	1-208-911-81 s	RES, CHIP 10K (1005)
R814	1-208-915-81 s	RES, CHIP 15K (1005)
R817	1-208-903-81 s	RES, CHIP 4.7K (1005)
R821	1-208-883-81 s	RES, CHIP 680 (1005)
R822	1-208-927-81 s	RES, CHIP 47K (1005)
R823	1-208-911-81 s	RES, CHIP 10K (1005)
R825	1-220-870-81 s	RES, CHIP 10 (1005)
R826	1-220-870-81 s	RES, CHIP 10 (1005)
R827	1-220-870-81 s	RES, CHIP 10 (1005)
R828	1-208-927-81 s	RES, CHIP 47K (1005)
R832	1-208-935-81 s	RES, CHIP 100K (1005)
R833	1-208-911-81 s	RES, CHIP 10K (1005)
R834	1-208-943-81 s	RES, CHIP 220K (1005)
R835	1-208-911-81 s	RES, CHIP 10K (1005)
R836	1-208-911-81 s	RES, CHIP 10K (1005)
R837	1-208-943-81 s	RES, CHIP 220K (1005)
R838	1-208-943-81 s	RES, CHIP 220K (1005)
R839	1-208-943-81 s	RES, CHIP 220K (1005)
R840	1-208-927-81 s	RES, CHIP 47K (1005)
R841	1-208-919-81 s	RES, CHIP 22K (1005)
R842	1-208-935-81 s	RES, CHIP 100K (1005)
R843	1-208-863-81 s	RES, CHIP 100 (1005)
R845	1-208-935-81 s	RES, CHIP 100K (1005)
R846	1-208-919-81 s	RES, CHIP 22K (1005)
R847	1-208-919-81 s	RES, CHIP 22K (1005)
R848	1-208-911-81 s	RES, CHIP 10K (1005)
R849	1-208-887-81 s	RES, CHIP 1.0K (1005)
R850	1-208-943-81 s	RES, CHIP 220K (1005)
R851	1-208-927-81 s	RES, CHIP 47K (1005)
R852	1-208-911-81 s	RES, CHIP 10K (1005)
R853	1-208-935-81 s	RES, CHIP 100K (1005)
R854	1-208-915-81 s	RES, CHIP 15K (1005)
R855	1-208-927-81 s	RES, CHIP 47K (1005)
R856	1-208-927-81 s	RES, CHIP 47K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R857	1-208-959-81	s RES, CHIP 1M (1005)
R858	1-208-935-81	s RES, CHIP 100K (1005)
R859	1-208-887-81	s RES, CHIP 1.0K (1005)
R860	1-208-911-81	s RES, CHIP 10K (1005)
R861	1-208-911-81	s RES, CHIP 10K (1005)
R862	1-208-863-81	s RES, CHIP 100 (1005)
R863	1-208-863-81	s RES, CHIP 100 (1005)
R864	1-208-895-81	s RES, CHIP 2.2K (1005)
R865	1-208-875-81	s RES, CHIP 330 (1005)
R866	1-208-875-81	s RES, CHIP 330 (1005)
R867	1-208-911-81	s RES, CHIP 10K (1005)
R868	1-208-871-81	s RES, CHIP 220 (1005)
R869	1-208-871-81	s RES, CHIP 220 (1005)
R870	1-208-871-81	s RES, CHIP 220 (1005)
R871	1-208-879-81	s RES, CHIP 470 (1005)
R872	1-208-887-81	s RES, CHIP 1.0K (1005)
R873	1-208-887-81	s RES, CHIP 1.0K (1005)
R874	1-208-863-81	s RES, CHIP 100 (1005)
R875	1-208-927-81	s RES, CHIP 47K (1005)
R876	1-208-867-81	s RES, CHIP 150 (1005)
R879	1-208-911-81	s RES, CHIP 10K (1005)
R880	1-208-911-81	s RES, CHIP 10K (1005)
R881	1-208-871-81	s RES, CHIP 220 (1005)
R882	1-208-911-81	s RES, CHIP 10K (1005)
R883	1-208-943-81	s RES, CHIP 220K (1005)
R884	1-208-911-81	s RES, CHIP 10K (1005)
R885	1-208-903-81	s RES, CHIP 4.7K (1005)
R886	1-208-911-81	s RES, CHIP 10K (1005)
R887	1-208-903-81	s RES, CHIP 4.7K (1005)
R888	1-208-911-81	s RES, CHIP 10K (1005)
R889	1-208-903-81	s RES, CHIP 4.7K (1005)
R892	1-208-911-81	s RES, CHIP 10K (1005)
R893	1-208-911-81	s RES, CHIP 10K (1005)
R894	1-208-911-81	s RES, CHIP 10K (1005)
R896	1-208-863-81	s RES, CHIP 100 (1005)
R897	1-208-863-81	s RES, CHIP 100 (1005)
R898	1-208-863-81	s RES, CHIP 100 (1005)
R903	1-208-911-81	s RES, CHIP 10K (1005)
R904	1-208-887-81	s RES, CHIP 1.0K (1005)
R905	1-208-927-81	s RES, CHIP 47K (1005)
R908	1-208-895-81	s RES, CHIP 2.2K (1005)
R909	1-208-895-81	s RES, CHIP 2.2K (1005)
R910	1-208-943-81	s RES, CHIP 220K (1005)
R912	1-208-935-81	s RES, CHIP 100K (1005)
R914	1-208-935-81	s RES, CHIP 100K (1005)
R915	1-208-895-81	s RES, CHIP 2.2K (1005)
R916	1-208-887-81	s RES, CHIP 1.0K (1005)
R917	1-208-863-81	s RES, CHIP 100 (1005)
R918	1-208-863-81	s RES, CHIP 100 (1005)
R919	1-208-887-81	s RES, CHIP 1.0K (1005)
R920	1-208-935-81	s RES, CHIP 100K (1005)
R921	1-208-947-81	s RES, CHIP 330K (1005)
R922	1-208-935-81	s RES, CHIP 100K (1005)
R923	1-208-927-81	s RES, CHIP 47K (1005)
R924	1-208-883-81	s RES, CHIP 680 (1005)
R925	1-208-935-81	s RES, CHIP 100K (1005)
R926	1-208-923-81	s RES, CHIP 33K (1005)
R927	1-208-887-81	s RES, CHIP 1.0K (1005)
R928	1-208-935-81	s RES, CHIP 100K (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R929	1-208-943-81	s RES, CHIP 220K (1005)
R930	1-208-931-81	s RES, CHIP 68K (1005)
R931	1-208-931-81	s RES, CHIP 68K (1005)
R932	1-208-911-81	s RES, CHIP 10K (1005)
R933	1-208-863-81	s RES, CHIP 100 (1005)
R934	1-208-895-81	s RES, CHIP 2.2K (1005)
R935	1-208-899-81	s RES, CHIP 3.3K (1005)
R936	1-208-899-81	s RES, CHIP 3.3K (1005)
R937	1-208-911-81	s RES, CHIP 10K (1005)
R938	1-220-878-81	s RES, CHIP 22 (1005)
R939	1-208-911-81	s RES, CHIP 10K (1005)
R940	1-208-895-81	s RES, CHIP 2.2K (1005)
R941	1-208-899-81	s RES, CHIP 3.3K (1005)
R942	1-208-899-81	s RES, CHIP 3.3K (1005)
R943	1-208-887-81	s RES, CHIP 1.0K (1005)
R944	1-220-878-81	s RES, CHIP 22 (1005)
R946	1-208-927-81	s RES, CHIP 47K (1005)
R947	1-208-927-81	s RES, CHIP 47K (1005)
R948	1-208-927-81	s RES, CHIP 47K (1005)
R949	1-208-927-81	s RES, CHIP 47K (1005)
R950	1-208-927-81	s RES, CHIP 47K (1005)
R951	1-208-927-81	s RES, CHIP 47K (1005)
R952	1-208-855-81	s RES, CHIP 47 (1005)
R953	1-208-855-81	s RES, CHIP 47 (1005)
R954	1-208-855-81	s RES, CHIP 47 (1005)
R955	1-208-855-81	s RES, CHIP 47 (1005)
R956	1-208-935-81	s RES, CHIP 100K (1005)
R957	1-208-887-81	s RES, CHIP 1.0K (1005)
R958	1-208-887-81	s RES, CHIP 1.0K (1005)
R959	1-220-878-81	s RES, CHIP 22 (1005)
R960	1-208-887-81	s RES, CHIP 1.0K (1005)
R961	1-218-990-81	s CONDUCTOR, CHIP (1005)
R962	1-208-943-81	s RES, CHIP 220K (1005)
R963	1-208-855-81	s RES, CHIP 47 (1005)
R965	1-208-887-81	s RES, CHIP 1.0K (1005)
R966	1-208-943-81	s RES, CHIP 220K (1005)
R967	1-208-943-81	s RES, CHIP 220K (1005)
R968	1-208-943-81	s RES, CHIP 220K (1005)
R969	1-208-887-81	s RES, CHIP 1.0K (1005)
R970	1-208-887-81	s RES, CHIP 1.0K (1005)
R971	1-208-887-81	s RES, CHIP 1.0K (1005)
R972	1-208-935-81	s RES, CHIP 100K (1005)
R973	1-208-935-81	s RES, CHIP 100K (1005)
R974	1-208-871-81	s RES, CHIP 220 (1005)
R975	1-208-863-81	s RES, CHIP 100 (1005)
R976	1-208-887-81	s RES, CHIP 1.0K (1005)
R977	1-208-887-81	s RES, CHIP 1.0K (1005)
R978	1-208-927-81	s RES, CHIP 47K (1005)
R979	1-208-927-81	s RES, CHIP 47K (1005)
R980	1-220-878-81	s RES, CHIP 22 (1005)
R981	1-220-870-81	s RES, CHIP 10 (1005)
R982	1-220-870-81	s RES, CHIP 10 (1005)
R983	1-220-878-81	s RES, CHIP 22 (1005)
R984	1-220-878-81	s RES, CHIP 22 (1005)
R986	1-220-870-81	s RES, CHIP 10 (1005)
R987	1-220-870-81	s RES, CHIP 10 (1005)
R988	1-220-870-81	s RES, CHIP 10 (1005)
R989	1-220-870-81	s RES, CHIP 10 (1005)
R990	1-220-870-81	s RES, CHIP 10 (1005)

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R991	1-220-870-81	s RES, CHIP 10 (1005)
R992	1-220-870-81	s RES, CHIP 10 (1005)
R993	1-220-870-81	s RES, CHIP 10 (1005)
R994	1-220-870-81	s RES, CHIP 10 (1005)
R995	1-220-870-81	s RES, CHIP 10 (1005)
R996	1-220-870-81	s RES, CHIP 10 (1005)
R997	1-220-870-81	s RES, CHIP 10 (1005)
R998	1-208-887-81	s RES, CHIP 1.0K (1005)
R999	1-208-935-81	s RES, CHIP 100K (1005)
R1001	1-220-870-81	s RES, CHIP 10 (1005)
R1002	1-220-870-81	s RES, CHIP 10 (1005)
R1003	1-220-870-81	s RES, CHIP 10 (1005)
R1004	1-220-870-81	s RES, CHIP 10 (1005)
R1005	1-220-870-81	s RES, CHIP 10 (1005)
R1006	1-220-870-81	s RES, CHIP 10 (1005)
R1007	1-220-870-81	s RES, CHIP 10 (1005)
R1008	1-220-870-81	s RES, CHIP 10 (1005)
R1009	1-220-878-81	s RES, CHIP 22 (1005)
R1010	1-220-878-81	s RES, CHIP 22 (1005)
R1011	1-220-878-81	s RES, CHIP 22 (1005)
R1012	1-220-870-81	s RES, CHIP 10 (1005)
R1013	1-220-870-81	s RES, CHIP 10 (1005)
R1014	1-220-870-81	s RES, CHIP 10 (1005)
R1015	1-220-870-81	s RES, CHIP 10 (1005)
R1016	1-220-870-81	s RES, CHIP 10 (1005)
R1022	1-220-878-81	s RES, CHIP 22 (1005)
R1023	1-220-878-81	s RES, CHIP 22 (1005)
R1024	1-208-935-81	s RES, CHIP 100K (1005)
R1025	1-208-935-81	s RES, CHIP 100K (1005)
R1027	1-208-935-81	s RES, CHIP 100K (1005)
RB701	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB702	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB703	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB800	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB801	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB802	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB910	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB911	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB912	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB913	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB914	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB915	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB916	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB917	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB918	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB919	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB920	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB921	1-234-380-21	o RES, NETWORK 47K (1005X4)
RB922	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB923	1-234-380-21	o RES, NETWORK 47K (1005X4)
RV1	1-227-248-11	s RES, VAR, CARBON 5K
RV2	1-227-248-11	s RES, VAR, CARBON 5K
RV700	1-227-248-11	s RES, VAR, CARBON 5K
RV701	1-227-248-11	s RES, VAR, CARBON 5K
S1	1-771-141-21	s SWITCH, SLIDE
S2	1-771-141-21	s SWITCH, SLIDE
S3	1-771-141-21	s SWITCH, SLIDE
S4	1-771-141-21	s SWITCH, SLIDE
S10	1-771-140-21	s SWITCH, SLIDE

(FP-157 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S20	1-771-140-21	s SWITCH, SLIDE
S460	1-771-140-21	s SWITCH, SLIDE
S501	1-692-270-41	s SWITCH, SLIDE
S700	1-771-140-21	s SWITCH, SLIDE
S701	1-570-878-31	s SWITCH, PUSH (1 KEY)
S702	1-571-787-11	s SWITCH, TACTILE
S703	1-771-141-21	s SWITCH, SLIDE
S830	1-771-721-21	s SWITCH, TACTILE
S831	1-572-725-11	s SWITCH, TACTILE
S832	1-572-725-11	s SWITCH, TACTILE
S833	1-572-725-11	s SWITCH, TACTILE
S834	1-572-725-11	s SWITCH, TACTILE
S835	1-572-725-11	s SWITCH, TACTILE
S836	1-572-725-11	s SWITCH, TACTILE
S837	1-771-141-21	s SWITCH, SLIDE
S838	1-771-141-21	s SWITCH, SLIDE
S839	1-771-141-21	s SWITCH, SLIDE
S840	1-572-725-11	s SWITCH, TACTILE
S841	1-572-725-11	s SWITCH, TACTILE
S842	1-572-725-11	s SWITCH, TACTILE
S843	1-572-725-11	s SWITCH, TACTILE
S844	1-572-725-11	s SWITCH, TACTILE
S845	1-572-725-11	s SWITCH, TACTILE
S846	1-572-725-11	s SWITCH, TACTILE
S911	1-692-270-41	s SWITCH, SLIDE
TP1	1-535-757-21	s CHIP, CHECKER
TP2	1-535-757-21	s CHIP, CHECKER
TP3	1-535-757-21	s CHIP, CHECKER
TP4	1-535-757-21	s CHIP, CHECKER
TP101	1-535-757-21	s CHIP, CHECKER
TP201	1-535-757-21	s CHIP, CHECKER
TP301	1-535-757-21	s CHIP, CHECKER
TP401	1-535-757-21	s CHIP, CHECKER
X910	1-813-177-21	s VIBRATOR, CRYSTAL (16 MHz)

HP-148 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1550-451-A	s MOUNTED CIRCUIT BOARD, HP-148
C1	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C2	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
CN101	1-573-768-21	s PIN, CONNECTOR (1.5MM) (SMD)5P
FL1	1-239-895-22	s FILTER, EMI (SMD)
J1	1-507-980-41	s JACK
L1	1-469-557-21	s INDUCTOR, CHIP 22UH (LB2016)
L2	1-469-557-21	s INDUCTOR, CHIP 22UH (LB2016)
L3	1-216-864-91	s CONDUCTOR, CHIP (1608)
Q1	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
Q2	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
R1	1-211-973-91	s RES, CHIP 15 (1608)
R2	1-211-973-91	s RES, CHIP 15 (1608)
R3	1-218-847-91	s RES, CHIP 1.0K (1608)
R4	1-218-847-91	s RES, CHIP 1.0K (1608)

HP-149 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1550-452-A	s MOUNTED CIRCUIT BOARD, HP-149
C1	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
C2	1-162-966-91	s CAP, CERAMIC 2200PF B 1608
CN103	1-580-756-21	s PIN, CONNECTOR (SMD) 7P
CN206	1-794-945-12	s JACK, SMALL TYPE (WITH SWITCH)
FL1	1-239-895-22	s FILTER, EMI (SMD)
FL2	1-239-895-22	s FILTER, EMI (SMD)
L3	1-469-549-21	s INDUCTOR, CHIP 1.0UH (LB2016)
L4	1-216-864-91	s CONDUCTOR, CHIP (1608)
Q1	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
Q2	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
R1	1-211-973-91	s RES, CHIP 15 (1608)
R2	1-211-973-91	s RES, CHIP 15 (1608)
R3	1-218-847-91	s RES, CHIP 1.0K (1608)
R4	1-218-847-91	s RES, CHIP 1.0K (1608)

IO-235 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-124-A	s MOUNTED CIRCUIT BOARD, IO-235
C6	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
CN1	1-760-388-21	o CONNECTOR PIN (SMD) 9P
CN101	1-778-787-13	o CONNECTOR, COAXIAL (BNC TYPE)
CN102	1-778-787-13	o CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-778-787-13	o CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-778-787-13	o CONNECTOR, COAXIAL (BNC TYPE)
FB1	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB2	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FB3	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FL1	1-239-897-22	s FILTER, EMI (SMD)
FL2	1-239-897-22	s FILTER, EMI (SMD)
R1	1-218-990-81	s CONDUCTOR, CHIP (1005)
R2	1-218-990-81	s CONDUCTOR, CHIP (1005)
R4	1-218-827-91	s RES, CHIP 150 (1608)
R5	1-218-827-91	s RES, CHIP 150 (1608)

KY-623 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-109-A	s MOUNTED CIRCUIT BOARD, KY-623
C1	1-165-908-91	s CAP, CERAMIC 1000000PF B 1608
CN1	1-580-057-21	s PIN, CONNECTOR (SMD) 4P
D1	8-719-077-09	s DIODE CL-196HR-CD-T
D2	8-719-077-09	s DIODE CL-196HR-CD-T
D3	8-719-077-09	s DIODE CL-196HR-CD-T
D4	8-719-077-09	s DIODE CL-196HR-CD-T
IC1	6-702-481-01	s IC PCA9555DB-118
Q1	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q3	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q4	8-729-928-82	s TRANSISTOR DTC144EE-TL
R1	1-208-875-81	s RES, CHIP 330 (1005)
R2	1-208-875-81	s RES, CHIP 330 (1005)
R3	1-208-875-81	s RES, CHIP 330 (1005)
R4	1-208-875-81	s RES, CHIP 330 (1005)
R5	1-208-863-81	s RES, CHIP 100 (1005)
R6	1-208-863-81	s RES, CHIP 100 (1005)
RB1	1-234-375-21	s RES, NETWORK 1K (1005X4)
RB2	1-234-375-21	s RES, NETWORK 1K (1005X4)
S1	1-572-725-11	s SWITCH, TACTILE
S2	1-572-725-11	s SWITCH, TACTILE
S3	1-572-725-11	s SWITCH, TACTILE
S4	1-572-725-11	s SWITCH, TACTILE
S5	1-572-725-11	s SWITCH, TACTILE
S6	1-572-725-11	s SWITCH, TACTILE
S7	1-572-725-11	s SWITCH, TACTILE

LED-444 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN1	1-794-375-21	s PIN, CONNECTOR 2P
D4	6-500-925-01	s DIODE CL-432S-WF-SD-TS
D6	6-500-925-01	s DIODE CL-432S-WF-SD-TS
R4	1-218-835-91	s RES, CHIP 330 (1608)
R6	1-218-835-91	s RES, CHIP 330 (1608)

MA-162 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-886-A	s MOUNTED CIRCUIT BOARD, MA-162
C9	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C10	1-126-405-21	s CAP, CHIP ELECT 10MF (6.3X5.7)
C11	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C12	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C13	1-117-145-21	s CAP, ELECT 1MF
C14	1-117-145-21	s CAP, ELECT 1MF
C15	1-117-145-21	s CAP, ELECT 1MF
C16	1-117-145-21	s CAP, ELECT 1MF
C17	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C18	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C19	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C20	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C21	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C22	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C23	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C24	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C25	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C26	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C27	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C28	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C31	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C32	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C33	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C34	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C35	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C36	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C37	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C38	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
CN1	1-573-768-21	s PIN, CONNECTOR (1.5MM) (SMD) 5P
D1	8-719-820-42	s DIODE 1SS302-TE85L
D2	8-719-820-42	s DIODE 1SS302-TE85L
D3	8-719-820-42	s DIODE 1SS302-TE85L
D4	8-719-820-42	s DIODE 1SS302-TE85L
D5	8-719-989-04	s DIODE DAN222-TL
D6	8-719-989-04	s DIODE DAN222-TL
FB1	1-400-461-21	s FERRITE, EMI (SMD) (1005)
FB2	1-400-461-21	s FERRITE, EMI (SMD) (1005)
FB3	1-400-461-21	s FERRITE, EMI (SMD) (1005)
FB4	1-400-461-21	s FERRITE, EMI (SMD) (1005)
IC1	8-759-422-21	s IC NJM4580V (TE2)
IC2	8-759-422-21	s IC NJM4580V (TE2)
L3	1-469-555-21	s INDUCTOR, CHIP 10UH (LB2016)
L4	1-469-555-21	s INDUCTOR, CHIP 10UH (LB2016)
Q1	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q2	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q3	8-729-202-14	s TRANSISTOR 2SC2713G-TE85L
Q4	8-729-202-14	s TRANSISTOR 2SC2713G-TE85L
Q5	8-729-012-36	s TRANSISTOR 2SK711-BL/V-TE85L
Q6	8-729-012-36	s TRANSISTOR 2SK711-BL/V-TE85L
Q7	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
Q8	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q9	8-729-012-36	s TRANSISTOR 2SK711-BL/V-TE85L
Q10	8-729-012-36	s TRANSISTOR 2SK711-BL/V-TE85L
Q11	8-729-928-25	s TRANSISTOR 2SA1774TL-QR

(MA-162 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q12	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q17	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q18	8-729-928-25	s TRANSISTOR 2SA1774TL-QR
R1	1-208-923-81	s RES, CHIP 33K (1005)
R2	1-208-923-81	s RES, CHIP 33K (1005)
R3	1-208-863-81	s RES, CHIP 100 (1005)
R4	1-218-855-91	s RES, CHIP 2.2K (1608)
R5	1-218-855-91	s RES, CHIP 2.2K (1608)
R6	1-218-855-91	s RES, CHIP 2.2K (1608)
R7	1-216-813-91	s RES, CHIP 220 (1608)
R8	1-218-855-91	s RES, CHIP 2.2K (1608)
R9	1-218-855-91	s RES, CHIP 2.2K (1608)
R10	1-218-855-91	s RES, CHIP 2.2K (1608)
R11	1-216-813-91	s RES, CHIP 220 (1608)
R12	1-218-855-91	s RES, CHIP 2.2K (1608)
R13	1-218-855-91	s RES, CHIP 2.2K (1608)
R14	1-218-855-91	s RES, CHIP 2.2K (1608)
R15	1-216-813-91	s RES, CHIP 220 (1608)
R16	1-218-855-91	s RES, CHIP 2.2K (1608)
R17	1-218-855-91	s RES, CHIP 2.2K (1608)
R18	1-218-855-91	s RES, CHIP 2.2K (1608)
R19	1-216-813-91	s RES, CHIP 220 (1608)
R20	1-208-919-81	s RES, CHIP 22K (1005)
R21	1-208-919-81	s RES, CHIP 22K (1005)
R22	1-208-919-81	s RES, CHIP 22K (1005)
R23	1-208-919-81	s RES, CHIP 22K (1005)
R24	1-208-863-81	s RES, CHIP 100 (1005)
R25	1-208-863-81	s RES, CHIP 100 (1005)
R26	1-208-863-81	s RES, CHIP 100 (1005)
R27	1-208-863-81	s RES, CHIP 100 (1005)
R28	1-208-959-81	s RES, CHIP 1M (1005)
R29	1-208-899-81	s RES, CHIP 3.3K (1005)
R30	1-208-919-81	s RES, CHIP 22K (1005)
R31	1-208-959-81	s RES, CHIP 1M (1005)
R34	1-208-871-81	s RES, CHIP 220 (1005)
R35	1-208-859-81	s RES, CHIP 68 (1005)
R36	1-208-959-81	s RES, CHIP 1M (1005)
R37	1-208-871-81	s RES, CHIP 220 (1005)
R38	1-208-859-81	s RES, CHIP 68 (1005)
R39	1-208-959-81	s RES, CHIP 1M (1005)
R40	1-208-923-81	s RES, CHIP 33K (1005)
R41	1-208-959-81	s RES, CHIP 1M (1005)
R42	1-208-959-81	s RES, CHIP 1M (1005)
R45	1-208-883-81	s RES, CHIP 680 (1005)
R46	1-208-871-81	s RES, CHIP 220 (1005)
R47	1-208-959-81	s RES, CHIP 1M (1005)
R48	1-208-883-81	s RES, CHIP 680 (1005)
R49	1-208-871-81	s RES, CHIP 220 (1005)
R50	1-208-959-81	s RES, CHIP 1M (1005)
R51	1-208-899-81	s RES, CHIP 3.3K (1005)
R52	1-208-919-81	s RES, CHIP 22K (1005)
R55	1-208-923-81	s RES, CHIP 33K (1005)
R56	1-208-891-81	s RES, CHIP 1.5K (1005)
R57	1-208-891-81	s RES, CHIP 1.5K (1005)
R58	1-208-891-81	s RES, CHIP 1.5K (1005)
R59	1-208-891-81	s RES, CHIP 1.5K (1005)
R60	1-208-899-81	s RES, CHIP 3.3K (1005)
R61	1-208-899-81	s RES, CHIP 3.3K (1005)

(MA-162 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R62	1-208-899-81	s RES, CHIP 3.3K (1005)
R63	1-208-899-81	s RES, CHIP 3.3K (1005)
R69	1-218-855-91	s RES, CHIP 2.2K (1608)
R70	1-218-855-91	s RES, CHIP 2.2K (1608)

MB-1111 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-1540-107-A	s	MOUNTED CIRCUIT BOARD, MB-1111
3pcs	2-534-514-02	o	SUPPORT (1)
6pcs	3-855-938-01	s	SCREW
2pcs	4-000-460-01	s	GASKET MB
3pcs	7-621-775-08	s	SCREW +B 2.6X3
C1	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C2	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C3	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C4	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C6	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C10	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C11	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C13	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C14	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C15	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C16	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C17	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C18	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C19	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C21	1-100-581-81	s	CAP,CHIP CERAMIC0.0047MF B1005
C22	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
CN1	1-778-532-21	o	CONNECTOR, BOARD TO BOARD 80P
CN2	1-580-055-21	o	PIN, CONNECTOR (SMD) 2P
CN102	1-817-097-21	s	PIN, CONNECTOR (1.5MM) (SMD) 13P
CN103	1-691-550-21	s	PIN, CONNECTOR (1.5MM) (SMD) 3P
CN105	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN106	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN107	1-766-431-51	s	HOUSING, CONNECTOR 30P
CN109	1-778-649-31	s	CONNECTOR, FFC/FPC(ZIF) ST 24P
CN110	1-779-992-21	s	PIN, CONNECTOR (PWB) 8P
CN111	1-784-625-31	s	CONNECTOR, FFC/FPC(ZIF) AN 30P
CN112	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD) 4P
CN113	1-778-651-31	s	CONNECTOR, FFC/FPC(ZIF) ST 40P
CN114	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD) 8P
CN115	1-779-804-21	s	CONNECTOR, BOARD TO BOARD 30P
CN116	1-691-591-21	o	PIN, CONNECTOR (1.5MM) (SMD) 8P
CN117	1-766-376-21	s	PIN, CONNECTOR (1.5MM) (SMD) 9P
CN118	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD) 4P
CN119	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD) 4P
CN120	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD) 4P
CN122	1-573-290-21	s	PIN, CONNECTOR (1.5MM) (SMD) 4P
CN123	1-794-519-21	s	PIN, CONNECTOR (PC BOARD) 14P
CN801	1-770-297-51	s	HOUSING, CONNECTOR 12P
ET1	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET2	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET3	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET4	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET5	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET6	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET7	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET8	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET9	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)

(MB-1111 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
ET10	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET11	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
ET12	1-780-569-11	s	TERMINAL (ON BOARD CONTACT)
S1	1-692-881-41	s	SWITCH, SLIDE

MS-86 BOARD

*1: LOT NO. 841-8A1
*2: LOT NO. 8A2-

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-096-A	s MOUNTED CIRCUIT BOARD, MS-86
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C5	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C6	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C7	1-115-340-91	s CAP, CERAMIC 0.22MF B (2012)
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-766-383-21	s PIN, CONNECTOR (1.5MM) (SMD) 12P
CN2	1-766-376-21	s PIN, CONNECTOR (1.5MM) (SMD) 9P
CN3	1-817-653-42	s MEMORY STICK CONNECTOR
CN4	1-784-625-31	s CONNECTOR, FFC/FPC (ZIF) AN 30P
CN5	1-573-806-21	s PIN, CONNECTOR (1.5MM) (SMD) 6P
D1	6-500-122-01	s DIODE CL-375HR/YG-D-TS
D2	8-719-989-04	s DIODE DAN222-TL
D3	8-719-083-83	s DIODE UDZSNPTE-1715B
D5	8-719-989-04	s DIODE DAN222-TL
FL1	1-234-489-21	s FILTER, EMI
FL2	1-234-489-21	s FILTER, EMI
IC1	8-759-338-95	s IC NJM2903V (TE2)
IC2	6-704-894-01	s IC PCA9554BS-118
IC3	8-759-436-53	s IC LTC1153CS8-E2
Q1	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q2	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q3	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q4	6-550-697-01	s TRANSISTOR HAT2164H-EL-E
R1	1-208-887-81	s RES, CHIP 1.0K (1005)
R2	1-208-927-81	s RES, CHIP 47K (1005)
R3	1-208-927-81	s RES, CHIP 47K (1005)
R4	1-208-915-81	s RES, CHIP 15K (1005)
R5	1-208-895-81	s RES, CHIP 2.2K (1005)
R6	1-208-931-81	s RES, CHIP 68K (1005)
R7	1-208-863-81	s RES, CHIP 100 (1005)
R8	1-208-887-81	s RES, CHIP 1.0K (1005)
R9	1-208-887-81	s RES, CHIP 1.0K (1005)
R10	1-208-887-81	s RES, CHIP 1.0K (1005)
R11	1-208-887-81	s RES, CHIP 1.0K (1005)
R12	1-208-887-81	s RES, CHIP 1.0K (1005)
R13	1-208-887-81	s RES, CHIP 1.0K (1005)
R14	1-208-911-81	s RES, CHIP 10K (1005)
R15	1-208-887-81	s RES, CHIP 1.0K (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R17	1-208-887-81	s RES, CHIP 1.0K (1005)
R18	1-208-935-81	s RES, CHIP 100K (1005)
R19	1-208-887-81	s RES, CHIP 1.0K (1005)
R20	1-208-863-81	s RES, CHIP 100 (1005)
R21	1-218-990-81	s CONDUCTOR, CHIP (1005)
R22	1-218-990-81	s CONDUCTOR, CHIP (1005)
R23	1-218-990-81	s CONDUCTOR, CHIP (1005)
R24	1-208-935-81	s RES, CHIP 100K (1005)
R26	1-208-911-81	s RES, CHIP 10K (1005)
R27	1-219-706-21	s RES, CHIP (SQUARE TYPE) 0.10
R28	*2 1-208-935-81	s RES, CHIP 100K (1005)

(MS-86 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R29	*1 1-208-919-81	s RES, CHIP 22K (1005)
	*2 1-208-923-81	s RES, CHIP 33K (1005)
R31	1-208-903-81	s RES, CHIP 4.7K (1005)
R32	1-208-855-81	s RES, CHIP 47 (1005)
R33	1-208-875-81	s RES, CHIP 330 (1005)

PA-342 BOARD

*1: LOT NO. 841-8A1
*2: LOT NO. 8A2-

Ref. No. or Q'ty	Part No.	SP Description
C1	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C2	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C3	1-100-816-21 s	CAP, ELECT 33MF (5.6X6.5)
C4	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C7	1-100-816-21 s	CAP, ELECT 33MF (5.6X6.5)
C8	1-135-349-21 s	CAP, ELECT 22MF (6.3X6)
C9	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C12	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-165-629-91 s	CAP, CERAMIC 1000000PF B(3225)
C15	1-165-629-91 s	CAP, CERAMIC 1000000PF B(3225)
C16	1-165-629-91 s	CAP, CERAMIC 1000000PF B(3225)
C17	1-165-629-91 s	CAP, CERAMIC 1000000PF B(3225)
C18	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C19	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-164-156-91 s	CAP, CHIP CERAMIC 0.1MF F 1608
C21	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C26	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C28	1-135-960-91 s	CAP, CHIP CERAMIC 10MF B(3225)
C29	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81 s	CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91 s	CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81 s	CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91 s	CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91 s	CAP, CHIP CERAMIC 1MF B
C51	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91 s	CAP, CHIP FILM 1MF
C54	1-135-646-91 s	CAP, CHIP FILM 1MF
C57	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C69	1-165-871-21 s	CAP, ELECT 22MF (4.0X5.5)
C71	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C74	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-165-871-21 s	CAP, ELECT 22MF (4.0X5.5)
C76	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C81	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(PA-342 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C83	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91 s	CAP, CHIP FILM 1MF
C85	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C96	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-692-81 s	CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C104	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C105	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
D1	6-502-121-01 s	DI MA3J142EGLS0
D4	6-502-146-01 o	DI MA2S7280G8S0
D5	8-719-210-46 s	DIODE EC10QS-06-TE12L
E1	1-535-877-22 s	CHIP, CHECKER
FB1	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21 s	FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21 s	FERRITE, EMI (SMD) (1608)
IC5	6-706-863-01 s	IC LMH6732MFX/NOPB
IC7	6-706-863-01 s	IC LMH6732MFX/NOPB
IC10	8-753-240-64 s	IC CXA3647CR-T4
Q1	8-729-809-73 s	TRANSISTOR 2SK536-TB
R10	1-208-863-81 s	RES, CHIP 100 (1005)
R13	1-208-863-81 s	RES, CHIP 100 (1005)
R15	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R16	1-208-935-81 s	RES, CHIP 100K (1005)
R18	1-208-959-81 s	RES, CHIP 1M (1005)
R19	1-208-855-81 s	RES, CHIP 47 (1005)
R20	1-208-927-81 s	RES, CHIP 47K (1005)
R21	1-208-899-81 s	RES, CHIP 3.3K (1005)
R22	1-208-915-81 s	RES, CHIP 15K (1005)
R29	1-208-911-81 s	RES, CHIP 10K (1005)
R32	1-220-870-81 s	RES, CHIP 10 (1005)
R33	1-208-903-81 s	RES, CHIP 4.7K (1005)
R34	1-208-919-81 s	RES, CHIP 22K (1005)
R35	1-208-887-81 s	RES, CHIP 1.0K (1005)
R36	1-208-919-81 s	RES, CHIP 22K (1005)
R37	1-220-878-81 s	RES, CHIP 22 (1005)
R38	1-220-878-81 s	RES, CHIP 22 (1005)
R39	1-208-911-81 s	RES, CHIP 10K (1005)
R40	1-208-911-81 s	RES, CHIP 10K (1005)
R45	1-208-887-81 s	RES, CHIP 1.0K (1005)
R47	1-208-887-81 s	RES, CHIP 1.0K (1005)
R49	1-208-887-81 s	RES, CHIP 1.0K (1005)
R51	1-208-887-81 s	RES, CHIP 1.0K (1005)
R53	1-208-935-81 s	RES, CHIP 100K (1005)
R55	1-208-935-81 s	RES, CHIP 100K (1005)

(PA-342 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R57	1-208-879-81	s RES, CHIP 470 (1005)
R59	1-208-879-81	s RES, CHIP 470 (1005)
R61	*1 1-208-855-81	s RES, CHIP 47 (1005)
	*2 1-208-863-81	s RES, CHIP 100 (1005)
R63	*1 1-208-855-81	s RES, CHIP 47 (1005)
	*2 1-208-863-81	s RES, CHIP 100 (1005)
R65	1-208-871-81	s RES, CHIP 220 (1005)
R67	1-208-871-81	s RES, CHIP 220 (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R87	1-218-990-81	s CONDUCTOR, CHIP (1005)
R88	1-218-990-81	s CONDUCTOR, CHIP (1005)
R91	1-208-875-81	s RES, CHIP 330 (1005)
R92	1-208-875-81	s RES, CHIP 330 (1005)
R95	1-208-911-81	s RES, CHIP 10K (1005)
R96	1-208-887-81	s RES, CHIP 1.0K (1005)
R97	1-208-895-81	s RES, CHIP 2.2K (1005)
R98	1-208-895-81	s RES, CHIP 2.2K (1005)
R99	1-208-903-81	s RES, CHIP 4.7K (1005)
R100	1-208-911-81	s RES, CHIP 10K (1005)
R101	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-220-882-81	s RES, CHIP 33 (1005)

PA-343 BOARD

*1: LOT NO. 841-8A1
*2: LOT NO. 8A2-

Ref. No. or Q'ty	Part No.	SP Description
C1	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C3	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C7	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C8	1-135-349-21	s CAP, ELECT 22MF (6.3X6)
C9	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C15	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C16	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C17	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C18	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-164-156-91	s CAP, CHIP CERAMIC 0.1MF F 1608
C21	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C26	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C28	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C29	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C51	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s CAP, CHIP FILM 1MF
C54	1-135-646-91	s CAP, CHIP FILM 1MF
C57	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C69	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C71	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C74	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C76	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C81	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(PA-343 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C83	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s CAP, CHIP FILM 1MF
C85	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C96	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C105	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
D1	6-502-121-01	s DI MA3J142EGLS0
D4	6-502-146-01	o DI MA2S7280G8S0
D5	8-719-210-46	s DIODE EC10QS-06-TE12L
E1	1-535-877-22	s CHIP, CHECKER
FB1	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s FERRITE, EMI (SMD) (1608)
IC5	6-706-863-01	s IC LMH6732MFX/NOPB
IC7	6-706-863-01	s IC LMH6732MFX/NOPB
IC10	8-753-240-64	s IC CXA3647CR-T4
Q1	8-729-809-73	s TRANSISTOR 2SK536-TB
R10	1-208-863-81	s RES, CHIP 100 (1005)
R13	1-208-863-81	s RES, CHIP 100 (1005)
R15	1-218-990-81	s CONDUCTOR, CHIP (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R18	1-208-959-81	s RES, CHIP 1M (1005)
R19	1-208-855-81	s RES, CHIP 47 (1005)
R20	1-208-927-81	s RES, CHIP 47K (1005)
R21	1-208-899-81	s RES, CHIP 3.3K (1005)
R22	1-208-915-81	s RES, CHIP 15K (1005)
R29	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-220-870-81	s RES, CHIP 10 (1005)
R33	1-208-903-81	s RES, CHIP 4.7K (1005)
R34	1-208-919-81	s RES, CHIP 22K (1005)
R35	1-208-887-81	s RES, CHIP 1.0K (1005)
R36	1-208-919-81	s RES, CHIP 22K (1005)
R37	1-220-878-81	s RES, CHIP 22 (1005)
R38	1-220-878-81	s RES, CHIP 22 (1005)
R39	1-208-911-81	s RES, CHIP 10K (1005)
R40	1-208-911-81	s RES, CHIP 10K (1005)
R45	1-208-887-81	s RES, CHIP 1.0K (1005)
R47	1-208-887-81	s RES, CHIP 1.0K (1005)
R49	1-208-887-81	s RES, CHIP 1.0K (1005)
R51	1-208-887-81	s RES, CHIP 1.0K (1005)
R53	1-208-935-81	s RES, CHIP 100K (1005)
R55	1-208-935-81	s RES, CHIP 100K (1005)

(PA-343 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R57	1-208-879-81	s RES, CHIP 470 (1005)
R59	1-208-879-81	s RES, CHIP 470 (1005)
R61	*1 1-208-855-81	s RES, CHIP 47 (1005)
	*2 1-208-863-81	s RES, CHIP 100 (1005)
R63	*1 1-208-855-81	s RES, CHIP 47 (1005)
	*2 1-208-863-81	s RES, CHIP 100 (1005)
R65	*1 1-208-875-81	s RES, CHIP 330 (1005)
	*2 1-208-871-81	s RES, CHIP 220 (1005)
R67	*1 1-208-875-81	s RES, CHIP 330 (1005)
	*2 1-208-871-81	s RES, CHIP 220 (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R87	1-218-990-81	s CONDUCTOR, CHIP (1005)
R88	1-218-990-81	s CONDUCTOR, CHIP (1005)
R91	1-208-875-81	s RES, CHIP 330 (1005)
R92	1-208-875-81	s RES, CHIP 330 (1005)
R95	1-208-911-81	s RES, CHIP 10K (1005)
R96	1-208-887-81	s RES, CHIP 1.0K (1005)
R97	1-208-895-81	s RES, CHIP 2.2K (1005)
R98	1-208-895-81	s RES, CHIP 2.2K (1005)
R99	1-208-903-81	s RES, CHIP 4.7K (1005)
R100	1-208-911-81	s RES, CHIP 10K (1005)
R101	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-220-882-81	s RES, CHIP 33 (1005)

PA-344 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C3	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C7	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C8	1-135-349-21	s CAP, ELECT 22MF (6.3X6)
C9	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C15	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C16	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C17	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C18	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-164-156-91	s CAP, CHIP CERAMIC 0.1MF F 1608
C21	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C24	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C26	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C28	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C29	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C51	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C52	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s CAP, CHIP FILM 1MF
C54	1-135-646-91	s CAP, CHIP FILM 1MF
C57	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C58	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C62	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C65	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C66	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C69	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C71	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C73	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C74	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C75	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C76	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C77	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C81	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s CAP, CHIP FILM 1MF
C85	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(PA-344 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C86	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C96	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C97	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C105	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
D1	6-502-121-01	s DI MA3J142EGLS0
D4	6-502-146-01	o DI MA2S7280G8S0
D5	8-719-210-46	s DIODE EC10QS-06-TE12L
E1	1-535-877-22	s CHIP, CHECKER
FB1	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s FERRITE, EMI (SMD) (1608)
IC4	8-759-346-27	s IC LM45BIM3X
IC5	6-706-863-01	s IC LMH6732MFX/NOPB
IC7	6-706-863-01	s IC LMH6732MFX/NOPB
IC10	8-753-240-64	s IC CXA3647CR-T4
Q1	8-729-809-73	s TRANSISTOR 2SK536-TB
R10	1-208-863-81	s RES, CHIP 100 (1005)
R13	1-208-863-81	s RES, CHIP 100 (1005)
R15	1-218-990-81	s CONDUCTOR, CHIP (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R18	1-208-959-81	s RES, CHIP 1M (1005)
R19	1-208-855-81	s RES, CHIP 47 (1005)
R20	1-208-927-81	s RES, CHIP 47K (1005)
R21	1-208-899-81	s RES, CHIP 3.3K (1005)
R22	1-208-915-81	s RES, CHIP 15K (1005)
R29	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-220-870-81	s RES, CHIP 10 (1005)
R33	1-208-903-81	s RES, CHIP 4.7K (1005)
R34	1-208-919-81	s RES, CHIP 22K (1005)
R35	1-208-887-81	s RES, CHIP 1.0K (1005)
R36	1-208-919-81	s RES, CHIP 22K (1005)
R37	1-220-878-81	s RES, CHIP 22 (1005)
R38	1-220-878-81	s RES, CHIP 22 (1005)
R39	1-208-911-81	s RES, CHIP 10K (1005)
R40	1-208-911-81	s RES, CHIP 10K (1005)
R45	1-208-887-81	s RES, CHIP 1.0K (1005)
R47	1-208-887-81	s RES, CHIP 1.0K (1005)
R49	1-208-887-81	s RES, CHIP 1.0K (1005)
R51	1-208-887-81	s RES, CHIP 1.0K (1005)
R53	1-208-935-81	s RES, CHIP 100K (1005)
R55	1-208-935-81	s RES, CHIP 100K (1005)
R57	1-208-879-81	s RES, CHIP 470 (1005)
R59	1-208-879-81	s RES, CHIP 470 (1005)

(PA-344 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R61	1-208-855-81	s RES, CHIP 47 (1005)
R63	1-208-855-81	s RES, CHIP 47 (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R87	1-218-990-81	s CONDUCTOR, CHIP (1005)
R88	1-218-990-81	s CONDUCTOR, CHIP (1005)
R91	1-208-875-81	s RES, CHIP 330 (1005)
R92	1-208-875-81	s RES, CHIP 330 (1005)
R95	1-208-911-81	s RES, CHIP 10K (1005)
R96	1-208-887-81	s RES, CHIP 1.0K (1005)
R97	1-208-895-81	s RES, CHIP 2.2K (1005)
R98	1-208-895-81	s RES, CHIP 2.2K (1005)
R99	1-208-903-81	s RES, CHIP 4.7K (1005)
R100	1-208-911-81	s RES, CHIP 10K (1005)
R101	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-220-882-81	s RES, CHIP 33 (1005)

PA-370A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C3	1-116-346-11	s CAP, ELECT 47MF 105
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C6	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C7	1-116-346-11	s CAP, ELECT 47MF 105
C8	1-116-117-11	s CAP, ELECT 22MF 105
C9	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C10	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C12	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C14	1-114-965-11	s CAP, CERAMIC 4.7MF X7R (3225)
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C21	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C28	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C29	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C51	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C52	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s CAP, CHIP FILM 1MF
C54	1-135-646-91	s CAP, CHIP FILM 1MF
C57	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C58	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C61	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C62	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C65	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C66	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C69	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C71	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C73	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C74	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C75	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C76	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C77	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C81	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C83	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s CAP, CHIP FILM 1MF
C85	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C86	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C87	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C88	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)

(PA-370A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C95	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C96	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C97	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C105	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C108	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C109	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C110	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C113	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C114	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C115	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
CN1	1-820-560-11	s CONNECTOR, COAXIAL(RECEPTACLE)
D4	6-502-146-01	o DI MA2S7280G8S0
D5	8-719-210-46	s DIODE EC10QS-06-TE12L
D6	6-502-146-01	o DI MA2S7280G8S0
D7	6-502-146-01	o DI MA2S7280G8S0
D8	8-719-989-04	s DIODE DAN222-TL
E1	1-535-877-22	s CHIP, CHECKER
FB1	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB8	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB9	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB11	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB12	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB13	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB14	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB15	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB16	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB17	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB18	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB19	1-469-094-21	s FERRITE, EMI (SMD) (1608)
IC5	6-706-863-01	s IC LMH6732MFX/NOPB
IC7	6-706-863-01	s IC LMH6732MFX/NOPB
IC10	8-753-240-64	s IC CXA3647CR-T4
Q1	8-729-809-73	s TRANSISTOR 2SK536-TB
R2	1-208-927-81	s RES, CHIP 47K (1005)
R4	1-208-927-81	s RES, CHIP 47K (1005)
R10	1-208-863-81	s RES, CHIP 100 (1005)
R13	1-208-863-81	s RES, CHIP 100 (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R18	1-218-989-11	s RES, CHIP 1M (1005)
R19	1-208-855-81	s RES, CHIP 47 (1005)
R20	1-208-927-81	s RES, CHIP 47K (1005)
R21	1-208-899-81	s RES, CHIP 3.3K (1005)

(PA-370A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R22	1-208-915-81	s RES, CHIP 15K (1005)
R29	1-208-911-81	s RES, CHIP 10K (1005)
R33	1-208-903-81	s RES, CHIP 4.7K (1005)
R34	1-208-715-11	s RES, CHIP 22K (1005)
R35	1-208-887-81	s RES, CHIP 1.0K (1005)
R36	1-208-715-11	s RES, CHIP 22K (1005)
R37	1-220-878-81	s RES, CHIP 22 (1005)
R38	1-220-878-81	s RES, CHIP 22 (1005)
R39	1-208-911-81	s RES, CHIP 10K (1005)
R40	1-208-911-81	s RES, CHIP 10K (1005)
R45	1-208-887-81	s RES, CHIP 1.0K (1005)
R47	1-208-887-81	s RES, CHIP 1.0K (1005)
R49	1-208-887-81	s RES, CHIP 1.0K (1005)
R51	1-208-887-81	s RES, CHIP 1.0K (1005)
R53	1-208-935-81	s RES, CHIP 100K (1005)
R55	1-208-935-81	s RES, CHIP 100K (1005)
R57	1-208-879-81	s RES, CHIP 470 (1005)
R59	1-208-879-81	s RES, CHIP 470 (1005)
R61	1-208-863-81	s RES, CHIP 100 (1005)
R63	1-208-863-81	s RES, CHIP 100 (1005)
R65	1-208-871-81	s RES, CHIP 220 (1005)
R67	1-208-871-81	s RES, CHIP 220 (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R91	1-208-671-11	s RES, CHIP 330 (1005)
R92	1-208-671-11	s RES, CHIP 330 (1005)
R95	1-208-911-81	s RES, CHIP 10K (1005)
R96	1-208-887-81	s RES, CHIP 1.0K (1005)
R97	1-208-895-81	s RES, CHIP 2.2K (1005)
R98	1-208-895-81	s RES, CHIP 2.2K (1005)
R99	1-208-903-81	s RES, CHIP 4.7K (1005)
R100	1-208-911-81	s RES, CHIP 10K (1005)
R101	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-220-882-81	s RES, CHIP 33 (1005)
R111	1-208-935-81	s RES, CHIP 100K (1005)
R112	1-208-935-81	s RES, CHIP 100K (1005)
R115	1-218-990-81	s CONDUCTOR, CHIP (1005)
R121	1-208-887-81	s RES, CHIP 1.0K (1005)
R122	1-208-887-81	s RES, CHIP 1.0K (1005)

PA-371A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C3	1-116-346-11	s CAP, ELECT 47MF 105
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C6	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C7	1-116-346-11	s CAP, ELECT 47MF 105
C8	1-116-117-11	s CAP, ELECT 22MF 105
C9	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C10	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C12	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C14	1-114-965-11	s CAP, CERAMIC 4.7MF X7R (3225)
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C21	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C28	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C29	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C51	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C52	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s CAP, CHIP FILM 1MF
C54	1-135-646-91	s CAP, CHIP FILM 1MF
C57	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C58	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C61	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C62	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C65	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C66	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C69	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C71	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C73	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C74	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C75	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C76	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C77	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C81	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C83	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s CAP, CHIP FILM 1MF
C85	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C86	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C87	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C88	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C89	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)

(PA-371A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C95	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C96	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C97	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C105	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C108	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C109	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C110	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C113	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C114	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C115	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
CN1	1-820-560-11	s CONNECTOR, COAXIAL(RECEPTACLE)
D4	6-502-146-01	o DI MA2S7280G8S0
D5	8-719-210-46	s DIODE EC10QS-06-TE12L
D6	6-502-146-01	o DI MA2S7280G8S0
D7	6-502-146-01	o DI MA2S7280G8S0
D8	8-719-989-04	s DIODE DAN222-TL
E1	1-535-877-22	s CHIP, CHECKER
FB1	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB8	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB9	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB11	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB12	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB13	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB14	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB15	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB16	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB17	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB18	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB19	1-469-094-21	s FERRITE, EMI (SMD) (1608)
IC5	6-706-863-01	s IC LMH6732MFX/NOPB
IC7	6-706-863-01	s IC LMH6732MFX/NOPB
IC10	8-753-240-64	s IC CXA3647CR-T4
Q1	8-729-809-73	s TRANSISTOR 2SK536-TB
R2	1-208-927-81	s RES, CHIP 47K (1005)
R4	1-208-927-81	s RES, CHIP 47K (1005)
R10	1-208-863-81	s RES, CHIP 100 (1005)
R13	1-208-863-81	s RES, CHIP 100 (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R18	1-218-989-11	s RES, CHIP 1M (1005)
R19	1-208-855-81	s RES, CHIP 47 (1005)
R20	1-208-927-81	s RES, CHIP 47K (1005)
R21	1-208-899-81	s RES, CHIP 3.3K (1005)

(PA-371A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R22	1-208-915-81	s RES, CHIP 15K (1005)
R29	1-208-911-81	s RES, CHIP 10K (1005)
R33	1-208-903-81	s RES, CHIP 4.7K (1005)
R34	1-208-715-11	s RES, CHIP 22K (1005)
R35	1-208-887-81	s RES, CHIP 1.0K (1005)
R36	1-208-715-11	s RES, CHIP 22K (1005)
R37	1-220-878-81	s RES, CHIP 22 (1005)
R38	1-220-878-81	s RES, CHIP 22 (1005)
R39	1-208-911-81	s RES, CHIP 10K (1005)
R40	1-208-911-81	s RES, CHIP 10K (1005)
R45	1-208-887-81	s RES, CHIP 1.0K (1005)
R47	1-208-887-81	s RES, CHIP 1.0K (1005)
R49	1-208-887-81	s RES, CHIP 1.0K (1005)
R51	1-208-887-81	s RES, CHIP 1.0K (1005)
R53	1-208-935-81	s RES, CHIP 100K (1005)
R55	1-208-935-81	s RES, CHIP 100K (1005)
R57	1-208-879-81	s RES, CHIP 470 (1005)
R59	1-208-879-81	s RES, CHIP 470 (1005)
R61	1-208-863-81	s RES, CHIP 100 (1005)
R63	1-208-863-81	s RES, CHIP 100 (1005)
R65	1-208-871-81	s RES, CHIP 220 (1005)
R67	1-208-871-81	s RES, CHIP 220 (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R91	1-208-671-11	s RES, CHIP 330 (1005)
R92	1-208-671-11	s RES, CHIP 330 (1005)
R95	1-208-911-81	s RES, CHIP 10K (1005)
R96	1-208-887-81	s RES, CHIP 1.0K (1005)
R97	1-208-895-81	s RES, CHIP 2.2K (1005)
R98	1-208-895-81	s RES, CHIP 2.2K (1005)
R99	1-208-903-81	s RES, CHIP 4.7K (1005)
R100	1-208-911-81	s RES, CHIP 10K (1005)
R101	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-220-882-81	s RES, CHIP 33 (1005)
R111	1-208-935-81	s RES, CHIP 100K (1005)
R112	1-208-935-81	s RES, CHIP 100K (1005)
R115	1-218-990-81	s CONDUCTOR, CHIP (1005)
R121	1-208-887-81	s RES, CHIP 1.0K (1005)
R122	1-208-887-81	s RES, CHIP 1.0K (1005)

PA-372A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C2	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C3	1-116-346-11	s CAP, ELECT 47MF 105
C4	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C5	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C6	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C7	1-116-346-11	s CAP, ELECT 47MF 105
C8	1-116-117-11	s CAP, ELECT 22MF 105
C9	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C10	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C11	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C12	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C14	1-114-965-11	s CAP, CERAMIC 4.7MF X7R (3225)
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C21	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C22	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C23	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C27	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C28	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C29	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C30	1-164-840-81	s CAP, CHIP CERAMIC 1PF CK 1005
C31	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C32	1-100-670-91	s CAP, CERAMIC 4.7MF C (2012)
C33	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C35	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C44	1-164-843-81	s CAP, CHIP CERAMIC 3PF CJ 1005
C46	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C48	1-125-827-91	s CAP, CHIP CERAMIC 1MF B
C51	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C52	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C53	1-135-646-91	s CAP, CHIP FILM 1MF
C54	1-135-646-91	s CAP, CHIP FILM 1MF
C57	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C58	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C61	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C62	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C65	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C66	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C69	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C71	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C73	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C74	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C75	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C76	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C77	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C81	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C83	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C84	1-135-646-91	s CAP, CHIP FILM 1MF
C85	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C86	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C87	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C88	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005

(PA-372A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C89	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C95	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C96	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C97	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C104	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C105	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C106	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C107	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C108	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C109	1-100-597-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C110	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C113	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C114	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
C115	1-100-671-91	s CAP, CERAMIC 4.7MF C (3216)
CN1	1-820-560-11	s CONNECTOR, COAXIAL(RECEPTACLE)
D4	6-502-146-01	o DI MA2S7280G8S0
D5	8-719-210-46	s DIODE EC10QS-06-TE12L
D6	6-502-146-01	o DI MA2S7280G8S0
D7	6-502-146-01	o DI MA2S7280G8S0
D8	8-719-989-04	s DIODE DAN222-TL
E1	1-535-877-22	s CHIP, CHECKER
FB1	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB4	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB5	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB6	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s FERRITE, EMI (SMD) (1608)
FB8	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB9	1-400-334-21	s FERRITE, EMI (SMD) (1608)
FB11	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB12	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB13	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB14	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB15	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB16	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB17	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB18	1-469-094-21	s FERRITE, EMI (SMD) (1608)
FB19	1-469-094-21	s FERRITE, EMI (SMD) (1608)
IC4	8-759-346-27	s IC LM45BIM3X
IC5	6-706-863-01	s IC LMH6732MFX/NOPB
IC7	6-706-863-01	s IC LMH6732MFX/NOPB
IC10	8-753-240-64	s IC CXA3647CR-T4
Q1	8-729-809-73	s TRANSISTOR 2SK536-TB
R2	1-208-927-81	s RES, CHIP 47K (1005)
R4	1-208-927-81	s RES, CHIP 47K (1005)
R10	1-208-863-81	s RES, CHIP 100 (1005)
R13	1-208-863-81	s RES, CHIP 100 (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R18	1-218-989-11	s RES, CHIP 1M (1005)
R19	1-208-855-81	s RES, CHIP 47 (1005)

(PA-372A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R20	1-208-927-81	s RES, CHIP 47K (1005)
R21	1-208-899-81	s RES, CHIP 3.3K (1005)
R22	1-208-915-81	s RES, CHIP 15K (1005)
R29	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-220-870-81	s RES, CHIP 10 (1005)
R33	1-208-903-81	s RES, CHIP 4.7K (1005)
R34	1-208-715-11	s RES, CHIP 22K (1005)
R35	1-208-887-81	s RES, CHIP 1.0K (1005)
R36	1-208-715-11	s RES, CHIP 22K (1005)
R37	1-220-878-81	s RES, CHIP 22 (1005)
R38	1-220-878-81	s RES, CHIP 22 (1005)
R39	1-208-911-81	s RES, CHIP 10K (1005)
R40	1-208-911-81	s RES, CHIP 10K (1005)
R45	1-208-887-81	s RES, CHIP 1.0K (1005)
R47	1-208-887-81	s RES, CHIP 1.0K (1005)
R49	1-208-887-81	s RES, CHIP 1.0K (1005)
R51	1-208-887-81	s RES, CHIP 1.0K (1005)
R53	1-208-935-81	s RES, CHIP 100K (1005)
R55	1-208-935-81	s RES, CHIP 100K (1005)
R57	1-208-879-81	s RES, CHIP 470 (1005)
R59	1-208-879-81	s RES, CHIP 470 (1005)
R61	1-208-863-81	s RES, CHIP 100 (1005)
R63	1-208-863-81	s RES, CHIP 100 (1005)
R75	1-208-887-81	s RES, CHIP 1.0K (1005)
R78	1-208-911-81	s RES, CHIP 10K (1005)
R91	1-208-671-11	s RES, CHIP 330 (1005)
R92	1-208-671-11	s RES, CHIP 330 (1005)
R95	1-208-911-81	s RES, CHIP 10K (1005)
R96	1-208-887-81	s RES, CHIP 1.0K (1005)
R97	1-208-895-81	s RES, CHIP 2.2K (1005)
R98	1-208-895-81	s RES, CHIP 2.2K (1005)
R99	1-208-903-81	s RES, CHIP 4.7K (1005)
R100	1-208-911-81	s RES, CHIP 10K (1005)
R101	1-208-887-81	s RES, CHIP 1.0K (1005)
R110	1-220-882-81	s RES, CHIP 33 (1005)
R115	1-218-990-81	s CONDUCTOR, CHIP (1005)
R121	1-208-887-81	s RES, CHIP 1.0K (1005)
R122	1-208-887-81	s RES, CHIP 1.0K (1005)

PD-118 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-111-A	s MOUNTED CIRCUIT BOARD, PD-118
C1	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C2	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C3	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C5	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C6	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C7	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C8	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C9	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C10	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C11	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C12	1-125-898-91	s CAP, CERAMIC 0.22MF B (3216)
C13	1-125-898-91	s CAP, CERAMIC 0.22MF B (3216)
C14	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C15	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C16	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C17	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C18	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C19	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C20	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C21	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C22	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C23	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C24	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C25	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C28	1-100-505-91	s CAP, CERAMIC 0.1MF C (1005)
C30	1-162-968-91	s CAP,CHIP CERAMIC 4700PF B 1608
C31	1-137-980-91	s CAP,CHIP CERAMIC 0.47MF B 3216
C33	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C34	1-100-881-91	s CAP, CERAMIC 47MF C (3216)
C35	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C36	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C37	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
CN1	1-794-997-21	s PIN, CONNECTOR 20P
CN2	1-774-261-31	s CONNECTOR, FFC/FPC(ZIF) AN 24P
CN3	1-815-597-31	s CONNECTOR, FFC/FPC (ZIF) AN 6P
CN5	1-794-377-21	s PIN, CONNECTOR 8P
D1	8-719-016-95	s DIODE 02DZ3.3-TPH3
D2	8-719-938-77	s DIODE SB05-05C-TB-E
E1	1-535-757-21	s CHIP, CHECKER
FB1	1-469-122-21	s FERRITE, EMI (SMD) (1608)
IC1	8-753-213-67	s IC CXA3662R-T4
IC3	8-759-468-72	s IC AK6420AM-E2
L1	1-412-951-21	s INDUCTOR, SMALL TYPE 10UH 2520
L3	1-412-951-21	s INDUCTOR, SMALL TYPE 10UH 2520
L4	1-416-510-21	s COIL, CHOKE 100UH
L5	1-469-549-21	s INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-019-83	s TRANSISTOR HN1B04FU-YGR-TE85R
Q2	8-729-019-83	s TRANSISTOR HN1B04FU-YGR-TE85R
Q3	8-729-019-83	s TRANSISTOR HN1B04FU-YGR-TE85R
Q8	6-551-265-01	s TRANSISTOR SI2307BDS-T1
R9	1-208-879-81	s RES, CHIP 470 (1005)
R10	1-208-919-81	s RES, CHIP 22K (1005)
R12	1-208-935-81	s RES, CHIP 100K (1005)
R13	1-208-943-81	s RES, CHIP 220K (1005)

(PD-118 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R14	1-208-935-81	s RES, CHIP 100K (1005)
R15	1-208-911-81	s RES, CHIP 10K (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R17	1-208-863-81	s RES, CHIP 100 (1005)
R18	1-208-911-81	s RES, CHIP 10K (1005)
R20	1-208-911-81	s RES, CHIP 10K (1005)
R21	1-220-870-81	s RES, CHIP 10 (1005)
R22	1-208-951-81	s RES, CHIP 470K (1005)
R25	1-208-943-81	s RES, CHIP 220K (1005)
R26	1-220-870-81	s RES, CHIP 10 (1005)
R27	1-208-919-81	s RES, CHIP 22K (1005)
R28	1-208-943-81	s RES, CHIP 220K (1005)
R29	1-208-951-81	s RES, CHIP 470K (1005)
R30	1-220-870-81	s RES, CHIP 10 (1005)
R31	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-220-870-81	s RES, CHIP 10 (1005)
R33	1-220-870-81	s RES, CHIP 10 (1005)
R34	1-208-951-81	s RES, CHIP 470K (1005)
R35	1-208-951-81	s RES, CHIP 470K (1005)
R36	1-208-959-81	s RES, CHIP 1M (1005)
R37	1-220-870-81	s RES, CHIP 10 (1005)
R38	1-220-870-81	s RES, CHIP 10 (1005)
R39	1-220-870-81	s RES, CHIP 10 (1005)
R51	1-208-935-81	s RES, CHIP 100K (1005)
R52	1-208-935-81	s RES, CHIP 100K (1005)
R53	1-218-990-81	s CONDUCTOR, CHIP (1005)

PS-708 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1164-283-A	s MOUNTED CIRCUIT BOARD, PS-708
C1	1-100-713-11	s CAP, DOUBLE LAYERS 4.7F
C2	1-100-713-11	s CAP, DOUBLE LAYERS 4.7F
C3	1-100-713-11	s CAP, DOUBLE LAYERS 4.7F
C4	1-100-713-11	s CAP, DOUBLE LAYERS 4.7F
R1	1-208-911-81	s RES, CHIP 10K (1005)
R2	1-208-911-81	s RES, CHIP 10K (1005)
R3	1-208-911-81	s RES, CHIP 10K (1005)
R4	1-208-911-81	s RES, CHIP 10K (1005)

PS-731 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-112-A	s MOUNTED CIRCUIT BOARD, PS-731
C1	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C2	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C3	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C4	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C5	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C6	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C7	1-162-919-91	s CAP, CERAMIC 22PF CH 1608
C8	1-127-715-91	s CAP, CHIP CERAMIC 0.22MF B 1608
C9	1-100-581-81	s CAP, CHIP CERAMIC 0.0047MF B1005
C10	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C11	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C12	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C13	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C14	1-135-348-21	s CAP, ELECT 150MF (10X8)
C15	1-107-819-81	s CAP, CHIP CERAMIC 22000PF B1005
C16	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C17	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C18	1-115-340-91	s CAP, CERAMIC 0.22MF B (2012)
C20	1-127-692-91	s CAP, CHIP CERAMIC 10MF B 3225
C22	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C23	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C26	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C28	1-164-934-81	s CAP, CHIP CERAMIC 330PF B 1005
C29	1-164-935-81	s CAP, CHIP CERAMIC 470PF B 1005
C30	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
CN1	1-774-297-21	s PIN, CONNECTOR (PC BOARD) 7P
CN2	1-750-005-21	o PIN, CONNECTOR (PC BOARD) 4P
D1	6-501-124-01	s DIODE RSX101VA-30TR
D2	6-501-124-01	s DIODE RSX101VA-30TR
D7	8-719-083-15	s DIODE 1SS389(TPH3)
FL1	1-400-065-21	s FILTER, EMI REMOVAL (SMD)
FL2	1-400-065-21	s FILTER, EMI REMOVAL (SMD)
FL3	1-400-065-21	s FILTER, EMI REMOVAL (SMD)
IC1	6-701-652-01	s IC MAX4374TEUB+TG069
IC3	8-759-488-34	s IC TLV2221CDBV
L1	1-400-300-11	s COIL, CHOKE
L2	1-469-549-21	s INDUCTOR, CHIP 1.0UH (LB2016)
L3	1-469-060-21	s INDUCTOR
L4	1-469-549-21	s INDUCTOR, CHIP 1.0UH (LB2016)
Q1	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q2	8-729-141-76	s TRANSISTOR 2SD596T1-DV345
Q3	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q5	6-551-144-01	s TRANSISTOR HAT2198R-EL-E
Q6	6-551-144-01	s TRANSISTOR HAT2198R-EL-E
Q7	8-729-928-82	s TRANSISTOR DTC144EE-TL
R2	1-208-911-81	s RES, CHIP 10K (1005)
R4	1-218-990-81	s CONDUCTOR, CHIP (1005)
R5	1-208-951-81	s RES, CHIP 470K (1005)
R6	1-208-911-81	s RES, CHIP 10K (1005)
R7	1-208-855-81	s RES, CHIP 47 (1005)
R8	1-208-887-81	s RES, CHIP 1.0K (1005)
R9	1-208-935-81	s RES, CHIP 100K (1005)
R10	1-219-684-21	s RES, CHIP (SQUARE TYPE) 0.01
R12	1-208-887-81	s RES, CHIP 1.0K (1005)
R13	1-208-911-81	s RES, CHIP 10K (1005)

(PS-731 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R14	1-208-895-81	s RES, CHIP 2.2K (1005)
R15	1-208-895-81	s RES, CHIP 2.2K (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R17	1-218-990-81	s CONDUCTOR, CHIP (1005)
R19	1-208-927-81	s RES, CHIP 47K (1005)
R20	1-208-927-81	s RES, CHIP 47K (1005)
R22	1-218-990-81	s CONDUCTOR, CHIP (1005)
R23	1-219-684-21	s RES, CHIP (SQUARE TYPE) 0.01
R24	1-218-990-81	s CONDUCTOR, CHIP (1005)
R28	1-208-911-81	s RES, CHIP 10K (1005)
R29	1-211-977-91	s RES, CHIP 22 (1608)
R30	1-211-977-91	s RES, CHIP 22 (1608)
R32	1-218-989-81	s RES, CHIP 1M
R33	1-208-911-81	s RES, CHIP 10K (1005)
R34	1-208-935-81	s RES, CHIP 100K (1005)

RE-246 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-887-A	s MOUNTED CIRCUIT BOARD, RE-246
1pc	7-623-507-01	s LUG, 2.6
C1	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C3	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C4	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C5	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C6	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C7	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C10	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C11	1-162-969-91	s CAP, CERAMIC 6800PF B 1608
C12	1-162-969-91	s CAP, CERAMIC 6800PF B 1608
C13	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C14	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C15	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C16	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C17	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C19	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C20	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C21	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C22	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C23	1-112-784-11	s CAP, ELECT(SOLID)
C24	1-112-785-11	s CAP, ELECT(SOLID)
C25	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C26	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C27	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C28	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C29	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C30	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C31	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C32	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C33	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C34	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C35	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C36	1-162-969-91	s CAP, CERAMIC 6800PF B 1608
C37	1-162-969-91	s CAP, CERAMIC 6800PF B 1608
C38	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C39	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C40	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C41	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C42	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C44	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C45	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C46	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C47	1-112-784-11	s CAP, ELECT(SOLID)
C48	1-112-784-11	s CAP, ELECT(SOLID)
C51	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C52	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C53	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C54	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C57	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C58	1-162-923-91	s CAP, CERAMIC 47PF CH 1608
C59	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C60	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C61	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C62	1-164-227-91	s CAP, CERAMIC 22000PF B 1608
C63	1-164-227-91	s CAP, CERAMIC 22000PF B 1608

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C64	1-162-969-91	s CAP, CERAMIC 6800PF B 1608
C65	1-162-969-91	s CAP, CERAMIC 6800PF B 1608
C66	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C67	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C68	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C69	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C70	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C71	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C72	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C73	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C74	1-114-509-11	s CAP, ELECT 150MF (6.3X7.7)
C75	1-114-509-11	s CAP, ELECT 150MF (6.3X7.7)
C76	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
C77	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
C78	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
C79	1-100-672-91	s CAP, CERAMIC 10MF C (3216)
C80	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C81	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C82	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C83	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C84	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C85	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C100	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C101	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C103	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C104	1-164-933-81	s CAP, CHIP CERAMIC 220PF B 1005
C105	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C106	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C107	1-100-567-81	s CAP, CHIP CERAMIC 0.01MF B 1005
C108	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C109	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C110	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C111	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C112	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C113	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C114	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C115	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C116	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C117	1-114-112-11	s CAP, ELECT 100MF (6.3X7.7)
C119	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C120	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C121	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C122	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C123	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C124	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C125	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C126	1-100-566-91	s CAP, CHIP CERAMIC 0.1MF B 1608
C127	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C128	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C129	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C130	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C133	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C135	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C136	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C138	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C142	1-112-784-11	s CAP, ELECT(SOLID)
C143	1-165-629-91	s CAP, CERAMIC 1000000PF B(3225)
C144	1-107-819-81	s CAP, CHIP CERAMIC 22000PF B1005

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C145	1-115-339-91	s	CAP, CERAMIC 0.1MF B (2012)
C146	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C147	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C148	1-114-509-11	s	CAP, ELECT 150MF (6.3X7.7)
C149	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C150	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C151	1-164-874-81	s	CAP,CHIP CERAMIC 100PF CH 1005
C152	1-100-055-21	s	CAP, CHIP CERAMIC 22MF B 3225
C153	1-135-960-91	s	CAP, CHIP CERAMIC 10MF B(3225)
C154	1-104-503-92	s	CAP, CERAMIC 100000PF X7R 3225
D1	8-719-938-77	s	DIODE SB05-05C-TB-E
D2	8-719-938-77	s	DIODE SB05-05C-TB-E
D3	8-719-938-77	s	DIODE SB05-05C-TB-E
D4	8-719-938-77	s	DIODE SB05-05C-TB-E
D6	8-719-938-77	s	DIODE SB05-05C-TB-E
D7	8-719-938-77	s	DIODE SB05-05C-TB-E
D8	6-501-817-01	s	DIODE MA2J1110GLS0
D9	6-501-817-01	s	DIODE MA2J1110GLS0
D11	6-501-817-01	s	DIODE MA2J1110GLS0
D12	6-501-817-01	s	DIODE MA2J1110GLS0
D100	8-719-072-43	s	DIODE RB050L-40TE25
D101	8-719-072-43	s	DIODE RB050L-40TE25
D102	8-719-072-43	s	DIODE RB050L-40TE25
D104	8-719-072-43	s	DIODE RB050L-40TE25
D105	8-719-072-43	s	DIODE RB050L-40TE25
D106	8-719-069-28	s	DIODE 1SS400TE-61
D108	8-719-069-28	s	DIODE 1SS400TE-61
D109	8-719-069-28	s	DIODE 1SS400TE-61
D110	8-719-069-28	s	DIODE 1SS400TE-61
D111	8-719-072-43	s	DIODE RB050L-40TE25
D112	8-719-072-43	s	DIODE RB050L-40TE25
FB100	1-400-580-21	s	FERRITE, EMI (SMD)
FB101	1-400-580-21	s	FERRITE, EMI (SMD)
FB102	1-400-580-21	s	FERRITE, EMI (SMD)
FB103	1-400-580-21	s	FERRITE, EMI (SMD)
FB104	1-400-580-21	s	FERRITE, EMI (SMD)
FB105	1-400-580-21	s	FERRITE, EMI (SMD)
FB108	1-416-976-21	s	FERRITE, EMI (SMD) (3216)
FB109	1-400-580-21	s	FERRITE, EMI (SMD)
FB110	1-400-580-21	s	FERRITE, EMI (SMD)
FB111	1-400-580-21	s	FERRITE, EMI (SMD)
IC1	6-707-828-01	s	IC MM1431ANRE
IC2	6-702-510-01	s	IC TPS5120DBTRG4
IC3	6-704-643-01	s	IC R3112N221A-TR-FA
IC4	6-702-510-01	s	IC TPS5120DBTRG4
IC6	8-759-338-95	s	IC NJM2903V(Te2)
IC7	6-702-510-01	s	IC TPS5120DBTRG4
IC8	6-707-864-01	s	IC TC74VHC123AFT(EKJ)
IC9	6-706-487-01	s	IC TC7SH08FU(T5RSOYJF)
IC100	8-759-669-64	s	IC TL1451ACPWR-12
IC101	6-705-480-01	s	IC LT3467ES6#TR
IC102	6-705-480-01	s	IC LT3467ES6#TR
IC104	6-711-266-01	s	IC MP1593DN-LF
IC105	6-711-266-01	s	IC MP1593DN-LF
L1	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L2	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L6	1-481-180-21	s	INDUCTOR 10UH
L7	1-481-180-21	s	INDUCTOR 10UH

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L11	1-416-606-21	s	COIL, CHOKE (SMD) 47UH
L12	1-416-606-21	s	COIL, CHOKE (SMD) 47UH
L100	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L101	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L102	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
L103	1-419-630-21	s	COIL, CHOKE 4.7UH
L105	1-416-511-21	s	COIL, CHOKE 47.0UH
L106	1-416-344-21	s	COIL, CHOKE 10UH
L114	1-456-046-21	s	COIL, CHOKE (SMD) 10UH(10X10)
PS100	▲ 1-576-677-21	s	RINK, IC (4A/72V)
Q1	6-551-736-01	s	TRANSISTOR FDS6690AS
Q2	6-551-736-01	s	TRANSISTOR FDS6690AS
Q3	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q4	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q5	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q6	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q7	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q8	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q9	6-552-008-01	s	TR IRF8113TRPBF
Q10	6-552-008-01	s	TR IRF8113TRPBF
Q11	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q12	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q13	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q14	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q15	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q16	6-551-736-01	s	TRANSISTOR FDS6690AS
Q17	6-551-736-01	s	TRANSISTOR FDS6690AS
Q19	8-729-046-04	s	TRANSISTOR FDS6690A
Q20	8-729-046-04	s	TRANSISTOR FDS6690A
Q21	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q22	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q23	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q24	6-552-009-01	s	TR IRF7821TRPBF
Q25	6-552-009-01	s	TR IRF7821TRPBF
Q26	8-729-046-04	s	TRANSISTOR FDS6690A
Q27	8-729-046-04	s	TRANSISTOR FDS6690A
Q100	6-551-662-01	s	TRANSISTOR SI4431BDY-T1-E3
Q101	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q102	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q103	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q104	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q106	8-729-929-27	s	TRANSISTOR DTC114TE-TL
Q111	8-729-928-05	s	TRANSISTOR 2SC4617TL-QR
Q112	8-729-928-25	s	TRANSISTOR 2SA1774TL-QR
Q121	8-729-928-28	s	TRANSISTOR DTA144EE-TL
R1	1-208-919-81	s	RES, CHIP 22K (1005)
R2	1-208-923-81	s	RES, CHIP 33K (1005)
R3	1-208-907-81	s	RES, CHIP 6.8K (1005)
R4	1-208-907-81	s	RES, CHIP 6.8K (1005)
R5	1-208-907-81	s	RES, CHIP 6.8K (1005)
R6	1-208-911-81	s	RES, CHIP 10K (1005)
R7	1-208-903-81	s	RES, CHIP 4.7K (1005)
R8	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R9	1-208-895-81	s	RES, CHIP 2.2K (1005)
R10	1-208-863-81	s	RES, CHIP 100 (1005)
R11	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R12	1-208-899-81	s	RES, CHIP 3.3K (1005)
R14	1-218-990-81	s	CONDUCTOR, CHIP (1005)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R15	1-208-923-81	s RES, CHIP 33K (1005)
R16	1-218-990-81	s CONDUCTOR, CHIP (1005)
R17	1-208-893-81	s RES, CHIP 1.8K (1005)
R18	1-208-863-81	s RES, CHIP 100 (1005)
R19	1-208-863-81	s RES, CHIP 100 (1005)
R20	1-208-907-81	s RES, CHIP 6.8K (1005)
R21	1-218-990-81	s CONDUCTOR, CHIP (1005)
R22	1-208-895-81	s RES, CHIP 2.2K (1005)
R23	1-208-895-81	s RES, CHIP 2.2K (1005)
R24	1-208-903-81	s RES, CHIP 4.7K (1005)
R25	1-208-919-81	s RES, CHIP 22K (1005)
R26	1-208-911-81	s RES, CHIP 10K (1005)
R27	1-208-911-81	s RES, CHIP 10K (1005)
R28	1-208-911-81	s RES, CHIP 10K (1005)
R29	1-208-911-81	s RES, CHIP 10K (1005)
R30	1-208-919-81	s RES, CHIP 22K (1005)
R31	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-208-923-81	s RES, CHIP 33K (1005)
R33	1-208-935-81	s RES, CHIP 100K (1005)
R34	1-218-990-81	s CONDUCTOR, CHIP (1005)
R35	1-208-895-81	s RES, CHIP 2.2K (1005)
R36	1-208-883-81	s RES, CHIP 680 (1005)
R37	1-208-911-81	s RES, CHIP 10K (1005)
R38	1-220-870-81	s RES, CHIP 10 (1005)
R39	1-208-895-81	s RES, CHIP 2.2K (1005)
R40	1-208-895-81	s RES, CHIP 2.2K (1005)
R41	1-220-870-81	s RES, CHIP 10 (1005)
R42	1-208-911-81	s RES, CHIP 10K (1005)
R43	1-208-911-81	s RES, CHIP 10K (1005)
R44	1-208-911-81	s RES, CHIP 10K (1005)
R45	1-208-911-81	s RES, CHIP 10K (1005)
R47	1-218-990-81	s CONDUCTOR, CHIP (1005)
R48	1-208-895-81	s RES, CHIP 2.2K (1005)
R49	1-208-863-81	s RES, CHIP 100 (1005)
R50	1-208-863-81	s RES, CHIP 100 (1005)
R51	1-208-895-81	s RES, CHIP 2.2K (1005)
R52	1-208-911-81	s RES, CHIP 10K (1005)
R53	1-208-911-81	s RES, CHIP 10K (1005)
R54	1-208-911-81	s RES, CHIP 10K (1005)
R55	1-208-911-81	s RES, CHIP 10K (1005)
R56	1-208-923-81	s RES, CHIP 33K (1005)
R57	1-208-911-81	s RES, CHIP 10K (1005)
R58	1-208-895-81	s RES, CHIP 2.2K (1005)
R59	1-208-911-81	s RES, CHIP 10K (1005)
R60	1-208-923-81	s RES, CHIP 33K (1005)
R61	1-208-895-81	s RES, CHIP 2.2K (1005)
R62	1-220-870-81	s RES, CHIP 10 (1005)
R63	1-208-911-81	s RES, CHIP 10K (1005)
R64	1-208-911-81	s RES, CHIP 10K (1005)
R65	1-220-870-81	s RES, CHIP 10 (1005)
R66	1-208-899-81	s RES, CHIP 3.3K (1005)
R67	1-208-899-81	s RES, CHIP 3.3K (1005)
R68	1-208-951-81	s RES, CHIP 470K (1005)
R69	1-208-927-81	s RES, CHIP 47K (1005)
R74	1-218-990-81	s CONDUCTOR, CHIP (1005)
R75	1-208-895-81	s RES, CHIP 2.2K (1005)
R76	1-208-863-81	s RES, CHIP 100 (1005)
R77	1-208-863-81	s RES, CHIP 100 (1005)
R78	1-208-883-81	s RES, CHIP 680 (1005)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R79	1-208-907-81	s RES, CHIP 6.8K (1005)
R80	1-208-911-81	s RES, CHIP 10K (1005)
R81	1-208-911-81	s RES, CHIP 10K (1005)
R82	1-208-911-81	s RES, CHIP 10K (1005)
R83	1-208-923-81	s RES, CHIP 33K (1005)
R84	1-208-911-81	s RES, CHIP 10K (1005)
R85	1-208-923-81	s RES, CHIP 33K (1005)
R86	1-208-911-81	s RES, CHIP 10K (1005)
R87	1-208-923-81	s RES, CHIP 33K (1005)
R88	1-208-923-81	s RES, CHIP 33K (1005)
R89	1-220-870-81	s RES, CHIP 10 (1005)
R90	1-208-907-81	s RES, CHIP 6.8K (1005)
R91	1-208-875-81	s RES, CHIP 330 (1005)
R92	1-220-870-81	s RES, CHIP 10 (1005)
R93	1-208-911-81	s RES, CHIP 10K (1005)
R94	1-208-903-81	s RES, CHIP 4.7K (1005)
R96	1-218-990-81	s CONDUCTOR, CHIP (1005)
R98	1-208-927-81	s RES, CHIP 47K (1005)
R99	1-208-927-81	s RES, CHIP 47K (1005)
R100	1-208-935-81	s RES, CHIP 100K (1005)
R101	1-208-935-81	s RES, CHIP 100K (1005)
R102	1-218-990-81	s CONDUCTOR, CHIP (1005)
R103	1-208-943-81	s RES, CHIP 220K (1005)
R104	1-208-911-81	s RES, CHIP 10K (1005)
R105	1-208-887-81	s RES, CHIP 1.0K (1005)
R106	1-208-887-81	s RES, CHIP 1.0K (1005)
R107	1-218-990-81	s CONDUCTOR, CHIP (1005)
R108	1-218-990-81	s CONDUCTOR, CHIP (1005)
R109	1-208-931-81	s RES, CHIP 68K (1005)
R110	1-208-899-81	s RES, CHIP 3.3K (1005)
R111	1-208-911-81	s RES, CHIP 10K (1005)
R112	1-218-990-81	s CONDUCTOR, CHIP (1005)
R113	1-208-903-81	s RES, CHIP 4.7K (1005)
R114	1-208-903-81	s RES, CHIP 4.7K (1005)
R115	1-208-943-81	s RES, CHIP 220K (1005)
R116	1-208-903-81	s RES, CHIP 4.7K (1005)
R117	1-208-943-81	s RES, CHIP 220K (1005)
R118	1-208-915-81	s RES, CHIP 15K (1005)
R119	1-208-903-81	s RES, CHIP 4.7K (1005)
R120	1-208-895-81	s RES, CHIP 2.2K (1005)
R121	1-208-899-81	s RES, CHIP 3.3K (1005)
R122	1-208-871-81	s RES, CHIP 220 (1005)
R123	1-208-923-81	s RES, CHIP 33K (1005)
R124	1-208-911-81	s RES, CHIP 10K (1005)
R125	1-208-923-81	s RES, CHIP 33K (1005)
R126	1-208-911-81	s RES, CHIP 10K (1005)
R129	1-218-990-81	s CONDUCTOR, CHIP (1005)
R130	1-208-911-81	s RES, CHIP 10K (1005)
R132	1-208-887-81	s RES, CHIP 1.0K (1005)
R133	1-208-935-81	s RES, CHIP 100K (1005)
R142	1-220-870-81	s RES, CHIP 10 (1005)
R143	1-208-915-81	s RES, CHIP 15K (1005)
R144	1-208-911-81	s RES, CHIP 10K (1005)
R147	1-218-990-81	s CONDUCTOR, CHIP (1005)
R148	1-208-919-81	s RES, CHIP 22K (1005)
R149	1-218-990-81	s CONDUCTOR, CHIP (1005)
R150	1-208-931-81	s RES, CHIP 68K (1005)
R151	1-208-911-81	s RES, CHIP 10K (1005)
R152	1-208-895-81	s RES, CHIP 2.2K (1005)

(RE-246 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R153	1-208-911-81	s RES, CHIP 10K (1005)
R154	1-218-990-81	s CONDUCTOR, CHIP (1005)
R155	1-208-935-81	s RES, CHIP 100K (1005)
R156	1-208-911-81	s RES, CHIP 10K (1005)
R157	1-208-927-81	s RES, CHIP 47K (1005)
R158	1-208-927-81	s RES, CHIP 47K (1005)
R159	1-218-990-81	s CONDUCTOR, CHIP (1005)
R160	1-218-990-81	s CONDUCTOR, CHIP (1005)
R161	1-208-919-81	s RES, CHIP 22K (1005)
R162	1-218-990-81	s CONDUCTOR, CHIP (1005)
R163	1-208-935-81	s RES, CHIP 100K (1005)
R164	1-208-919-81	s RES, CHIP 22K (1005)
R165	1-208-911-81	s RES, CHIP 10K (1005)
R166	1-208-911-81	s RES, CHIP 10K (1005)
R167	1-218-990-81	s CONDUCTOR, CHIP (1005)
R168	1-208-927-81	s RES, CHIP 47K (1005)
R169	1-208-927-81	s RES, CHIP 47K (1005)
R170	1-218-990-81	s CONDUCTOR, CHIP (1005)

W1	1-966-215-11	s HARNESS, SUB (RE-TE)
W2	1-966-215-11	s HARNESS, SUB (RE-TE)

RM-216 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-121-A	s MOUNTED CIRCUIT BOARD, RM-216
CN2	1-766-696-11	o CONNECTOR, ROUND TYPE 8P
FB1	1-400-832-21	s SMD EMI FERRITE
FB2	1-400-832-21	s SMD EMI FERRITE
FB3	1-400-832-21	s SMD EMI FERRITE
FB4	1-400-832-21	s SMD EMI FERRITE
FB8	1-414-445-21	s FERRITE, EMI (SMD) (1608)
FL1	1-400-065-21	s FILTER, EMI REMOVAL (SMD)
FL2	1-400-065-21	s FILTER, EMI REMOVAL (SMD)
R1	1-218-990-81	s CONDUCTOR, CHIP (1005)

RX-101 BOARD

*1: LOT NO. 841-8A1
*2: LOT NO. 8A2-

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-094-A	s MOUNTED CIRCUIT BOARD, RX-101
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C3	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C4	1-112-021-91	s CAP, CERAMIC 2.2MF C (1608)
C5	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C7	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-112-021-91	s CAP, CERAMIC 2.2MF C (1608)
C11	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-112-746-91	s CAP, CERAMIC 4.7MF B (1608)
C13	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C14	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
CN2	1-774-261-31	s CONNECTOR, FFC/FPC(ZIF) AN 24P
IC1	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC2	8-759-698-08	s IC SN74CBTLV1G125DCKR
IC3	8-759-698-08	s IC SN74CBTLV1G125DCKR
IC4	8-759-698-08	s IC SN74CBTLV1G125DCKR
IC5	8-759-698-08	s IC SN74CBTLV1G125DCKR
IC6	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC7	8-759-422-21	s IC NJM4580V(TE2)
IC8	8-759-422-21	s IC NJM4580V(TE2)
L1	1-469-555-21	s INDUCTOR, CHIP 10UH (LB2016)
L2	1-469-555-21	s INDUCTOR, CHIP 10UH (LB2016)
R1	1-208-911-81	s RES, CHIP 10K (1005)
R3	1-208-887-81	s RES, CHIP 1.0K (1005)
R4	1-208-891-81	s RES, CHIP 1.5K (1005)
R5	1-208-895-81	s RES, CHIP 2.2K (1005)
R6	1-208-871-81	s RES, CHIP 220 (1005)
R7	1-208-875-81	s RES, CHIP 330 (1005)
R8	1-208-895-81	s RES, CHIP 2.2K (1005)
R9	1-208-891-81	s RES, CHIP 1.5K (1005)
R10	1-208-887-81	s RES, CHIP 1.0K (1005)
R11	1-208-911-81	s RES, CHIP 10K (1005)
R12	*1 1-218-990-81	s CONDUCTOR, CHIP (1005)
R13	1-208-887-81	s RES, CHIP 1.0K (1005)
R14	1-208-891-81	s RES, CHIP 1.5K (1005)
R15	1-208-895-81	s RES, CHIP 2.2K (1005)
R16	1-208-871-81	s RES, CHIP 220 (1005)
R17	1-208-875-81	s RES, CHIP 330 (1005)
R18	1-208-895-81	s RES, CHIP 2.2K (1005)
R19	1-208-891-81	s RES, CHIP 1.5K (1005)
R20	1-208-887-81	s RES, CHIP 1.0K (1005)
R21	1-208-935-81	s RES, CHIP 100K (1005)
R23	1-208-935-81	s RES, CHIP 100K (1005)
R24	1-220-878-81	s RES, CHIP 22 (1005)
R25	1-220-878-81	s RES, CHIP 22 (1005)
R26	1-208-935-81	s RES, CHIP 100K (1005)
R27	1-208-935-81	s RES, CHIP 100K (1005)
R28	1-220-878-81	s RES, CHIP 22 (1005)
R31	1-220-878-81	s RES, CHIP 22 (1005)
RB1	1-234-370-21	s RES, NETWORK 22 (1005X4)

SE-709 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8347-272-A	s MOUNTED CIRCUIT BOARD, SE-709
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-764-093-21	o PIN, CONNECTOR (PC BOARD) 8P
CN2	1-580-055-21	o PIN, CONNECTOR (SMD) 2P
PH1	8-719-988-19	s PHTO REFLECTOR PR-11-C-T
PH2	8-719-988-19	s PHTO REFLECTOR PR-11-C-T
PH3	8-719-988-19	s PHTO REFLECTOR PR-11-C-T
PH4	8-719-988-19	s PHTO REFLECTOR PR-11-C-T
R1	1-208-879-81	s RES, CHIP 470 (1005)
R2	1-208-879-81	s RES, CHIP 470 (1005)
R3	1-208-879-81	s RES, CHIP 470 (1005)
R4	1-208-879-81	s RES, CHIP 470 (1005)
R5	1-208-935-81	s RES, CHIP 100K (1005)
R6	1-208-935-81	s RES, CHIP 100K (1005)
R7	1-208-935-81	s RES, CHIP 100K (1005)
R8	1-208-935-81	s RES, CHIP 100K (1005)

SE-857 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1366-119-A	s MOUNTED CIRCUIT BOARD, SE-857
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-119-923-81	s CAP, CERAMIC 0.047MF B 1005
C3	1-119-923-81	s CAP, CERAMIC 0.047MF B 1005
C4	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-117-949-81	s CAP, CHIP CERAMIC 820PF B1005
C6	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C7	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C8	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C519	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C521	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C522	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C523	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C524	1-100-581-81	s CAP,CHIP CERAMIC0.0047MF B1005
CN1	1-580-056-21	s PIN, CONNECTOR (SMD) 3P
CN4	1-580-055-21	o PIN, CONNECTOR (SMD) 2P
CN709	1-764-082-21	s PIN, CONNECTOR (PC BOARD) 11P
CN1125	1-774-873-61	s CONNECTOR, FPC 6P
D501	8-719-024-71	s DIODE 1SS362-TE85L
IC4	6-702-168-01	s IC AK6512CM-E2
IC505	6-702-762-01	s IC TC75S58FE(TE85R)
R1	1-245-604-81	s RES, CHIP 10M (1005)
R2	1-208-911-81	s RES, CHIP 10K (1005)
R3	1-208-887-81	s RES, CHIP 1.0K (1005)
R4	1-208-923-81	s RES, CHIP 33K (1005)
R5	1-208-931-81	s RES, CHIP 68K (1005)
R6	1-208-863-81	s RES, CHIP 100 (1005)
R509	1-208-887-81	s RES, CHIP 1.0K (1005)
R510	1-208-887-81	s RES, CHIP 1.0K (1005)
R511	1-208-903-81	s RES, CHIP 4.7K (1005)
R512	1-208-903-81	s RES, CHIP 4.7K (1005)
R513	1-208-903-81	s RES, CHIP 4.7K (1005)
R514	1-208-903-81	s RES, CHIP 4.7K (1005)
R515	1-208-927-81	s RES, CHIP 47K (1005)
R516	1-208-919-81	s RES, CHIP 22K (1005)
R517	1-208-911-81	s RES, CHIP 10K (1005)
R518	1-208-903-81	s RES, CHIP 4.7K (1005)
R519	1-208-947-81	s RES, CHIP 330K (1005)
R520	1-208-911-81	s RES, CHIP 10K (1005)
R521	1-208-887-81	s RES, CHIP 1.0K (1005)
RB1	1-234-377-21	s RES, NETWORK 4.7K (1005X4)
S1	1-762-805-41	s SWITCH, PUSH (1 KEY)
S2	1-762-805-41	s SWITCH, PUSH (1 KEY)
S3	1-762-805-41	s SWITCH, PUSH (1 KEY)
VS1	1-479-022-71	s SENSOR, ANGULAR VELOCITY
VS2	1-479-022-81	s SENSOR, ANGULAR VELOCITY

SE-858 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1366-120-A	s MOUNTED CIRCUIT BOARD, SE-858
CN1	1-817-054-21	s PIN, CONNECTOR 6P
CN2	1-580-055-21	o PIN, CONNECTOR (SMD) 2P
PH1	8-719-069-53	s DIODE CPI-210-T
PH2	8-719-069-53	s DIODE CPI-210-T
R1	1-208-879-81	s RES, CHIP 470 (1005)
R2	1-208-879-81	s RES, CHIP 470 (1005)
S3	1-762-805-41	s SWITCH, PUSH (1 KEY)
S4	1-762-805-41	s SWITCH, PUSH (1 KEY)

SE-924 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-100-A	s MOUNTED CIRCUIT BOARD, SE-924
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN1	1-573-806-21	s PIN, CONNECTOR (1.5MM) (SMD) 6P
PH1	6-600-300-01	s IC NJL5901R (TE1)
PH2	6-600-300-01	s IC NJL5901R (TE1)
Q1	8-729-929-27	s TRANSISTOR DTC114TE-TL
Q2	8-729-929-27	s TRANSISTOR DTC114TE-TL
R1	1-218-839-91	s RES, CHIP 470 (1608)
R2	1-218-839-91	s RES, CHIP 470 (1608)
R3	1-208-911-81	s RES, CHIP 10K (1005)
R4	1-208-911-81	s RES, CHIP 10K (1005)

SE-1029 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1786-308-A	s MOUNTED CIRCUIT BOARD, SE-1029
C1	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
CN1	1-573-806-21	s PIN, CONNECTOR (1.5MM) (SMD) 6P
PH1	6-600-300-01	s IC NJL5901R (TE1)
PH2	6-600-300-01	s IC NJL5901R (TE1)
Q1	8-729-929-27	s TRANSISTOR DTC114TE-TL
Q2	8-729-929-27	s TRANSISTOR DTC114TE-TL
R1	1-208-879-81	s RES, CHIP 470 (1005)
R2	1-208-879-81	s RES, CHIP 470 (1005)
R3	1-208-911-81	s RES, CHIP 10K (1005)
R4	1-208-911-81	s RES, CHIP 10K (1005)

SW-1125G BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1138-489-A	s MOUNTED CIRCUIT BOARD, SW-1125G
CN1	1-774-873-61	s CONNECTOR, FPC 6P
S1	Δ 1-572-288-21	s SWITCH, PUSH
S2	Δ 1-762-805-41	s SWITCH, PUSH (1 KEY)

SW-1249 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1164-298-A	s MOUNTED CIRCUIT BOARD, SW-1249
C1	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
C2	1-162-970-91	s CAP, CERAMIC 0.01MF B 1608
CN1	1-580-056-21	s PIN, CONNECTOR (SMD) 3P
R1	1-218-847-91	s RES, CHIP 1.0K (1608)
R2	1-218-847-91	s RES, CHIP 1.0K (1608)
S1	1-771-348-11	s SWITCH, TACTILE
S2	1-771-348-11	s SWITCH, TACTILE

SW-1352 BOARD

Ref. No. or Q'ty	Part No.	SP Description
S1	1-571-422-11	s SWITCH, TOGGLE
S2	1-571-422-11	s SWITCH, TOGGLE

SW-1385 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1317-214-A	s MOUNTED CIRCUIT BOARD, SW-1385
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C9	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C10	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
CN1	1-695-320-21	o PIN, CONNECTOR (1.5MM) (SMD) 2P
CN2	1-691-551-21	o PIN, CONNECTOR (SMD) 8P
D1	8-719-048-98	s DIODE RB160L-40TE25
PH1	8-719-069-53	s DIODE CPI-210-T
PH2	8-719-069-53	s DIODE CPI-210-T
PS1	Δ 1-576-677-21	s RINK, IC (4A/72V)
Q5	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q6	6-550-980-01	s TRANSISTOR RN1904 (T5RSONY,D,F)
R2	1-208-935-81	s RES, CHIP 100K (1005)
R3	1-208-919-81	s RES, CHIP 22K (1005)
R4	1-208-935-81	s RES, CHIP 100K (1005)
R6	1-208-875-81	s RES, CHIP 330 (1005)
R8	1-208-919-81	s RES, CHIP 22K (1005)
R12	1-208-919-81	s RES, CHIP 22K (1005)

SW-1391 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-101-A	s MOUNTED CIRCUIT BOARD, SW-1391
1pc	3-629-459-03	o PLATE,GROUND
1pc	3-855-938-01	s SCREW
C1	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
C2	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
C3	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
C4	1-107-826-91	s CAP, CHIP CERAMIC 0.1MF B
CN1	1-565-884-11	o PIN, CONNECTOR (PC BOARD) 12P
R1	1-216-864-91	s CONDUCTOR, CHIP (1608)
R2	1-216-864-91	s CONDUCTOR, CHIP (1608)
S1	1-762-001-21	s SWITCH, TOGGLE
S2	1-762-000-21	s SWITCH, TOGGLE
S3	1-762-000-21	s SWITCH, TOGGLE
S4	1-762-000-21	s SWITCH, TOGGLE
S5	1-762-488-21	s SWITCH, TOGGLE
S6	1-762-019-21	s SWITCH, TOGGLE

SW-1425 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-980-A	s MOUNTED CIRCUIT BOARD, SW-1425
C1	1-162-964-91	s CAP,CHIP CERAMIC 1000PF B 1608
C2	1-162-964-91	s CAP,CHIP CERAMIC 1000PF B 1608
C3	1-162-964-91	s CAP,CHIP CERAMIC 1000PF B 1608
C4	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C5	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C6	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C7	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
C8	1-162-927-91	s CAP, CERAMIC 100PF CH 1608
CN1	1-766-376-21	s PIN, CONNECTOR (1.5MM) (SMD) 9P
R1	1-218-823-91	s RES, CHIP 100 (1608)
R2	1-218-847-91	s RES, CHIP 1.0K (1608)
R3	1-218-847-91	s RES, CHIP 1.0K (1608)
R4	1-218-847-91	s RES, CHIP 1.0K (1608)
R5	1-218-847-91	s RES, CHIP 1.0K (1608)
R6	1-218-847-91	s RES, CHIP 1.0K (1608)
RV1	1-223-686-11	s RES, VAR, CARBON 5K/5K
S1	1-570-995-11	s SWITCH, KEY BOARD
S2	1-762-531-21	s SWITCH, TOGGLE
S3	1-762-124-21	s SWITCH, TOGGLE

SW-1426 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN1	1-580-055-21	o PIN, CONNECTOR (SMD) 2P
S1	1-762-002-21	s SWITCH, TOGGLE

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
C619	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C621	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C622	1-112-717-91	s	CAP, CERAMIC 1UF B (1005)
C624	1-164-882-81	s	CAP,CHIP CERAMIC 220PF CH 1005
C625	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C700	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C701	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C800	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C801	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C802	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C803	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C804	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C805	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C806	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C807	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C808	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C809	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C810	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C811	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C812	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C813	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C814	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C815	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C816	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C817	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C818	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C819	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C820	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C821	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C822	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C823	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C824	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C825	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C826	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C827	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C828	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C829	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C830	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C831	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C832	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C833	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C834	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C835	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C836	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C837	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C838	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C839	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C840	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C841	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C842	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C843	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C844	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C845	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C846	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C847	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C848	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C849	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C850	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C851	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005

(SY-355 BOARD (suffix 11))

[illegible]

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
C1354	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1355	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1356	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1357	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1359	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1362	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1363	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1364	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1365	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1366	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1367	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1368	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1369	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1370	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1371	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1372	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1373	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1374	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1375	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1376	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1377	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1378	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1379	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1380	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1381	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1382	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1383	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1421	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-112-300-91 s	CAP, CERAMIC 4.7MF B (2012)
C1504	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
C1509	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1516	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1517	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1518	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1519	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1520	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1521	1-100-611-91 s	CAP, CERAMIC 22MF C (2012)
C1522	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1523	1-164-850-81 s	CAP, CHIP CERAMIC 10PF CH 1005
C1524	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1526	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
C1527	1-112-717-91 s	CAP, CERAMIC 1UF B (1005)
C1529	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C1530	1-100-880-91 s	CAP, CERAMIC 100MF C (3225)
CN200	1-764-099-21 s	PIN, CONNECTOR (PC BOARD) 14P
CN300	1-580-057-21 s	PIN, CONNECTOR (SMD) 4P
CN301	1-794-142-31 s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN500	1-764-095-21 o	PIN, CONNECTOR (PC BOARD) 10P
CN501	1-770-453-21 o	CONNECTOR, BOARD TO BOARD 70P
CN502	1-779-522-31 s	CONNECTOR, FFC/FPC(ZIF) AN 40P
CN600	1-691-551-21 o	PIN, CONNECTOR (SMD) 8P
CN1200	1-764-099-21 s	PIN, CONNECTOR (PC BOARD) 14P
CN1300	1-794-142-31 s	CONNECTOR, FFC/FPC(ZIF) AN 36P
CN1301	1-580-057-21 s	PIN, CONNECTOR (SMD) 4P
CN1400	1-764-095-21 o	PIN, CONNECTOR (PC BOARD) 10P
CN1401	1-770-453-21 o	CONNECTOR, BOARD TO BOARD 70P
CN1500	1-569-775-21 o	PIN, CONNECTOR (SMD) 5P
D300	8-719-074-31 s	DIODE CL-196YG-CD-T
D301	8-719-074-31 s	DIODE CL-196YG-CD-T
D302	8-719-074-31 s	DIODE CL-196YG-CD-T
D303	8-719-074-31 s	DIODE CL-196YG-CD-T
D500	8-719-074-31 s	DIODE CL-196YG-CD-T
D501	8-719-074-31 s	DIODE CL-196YG-CD-T
D600	8-719-077-09 s	DIODE CL-196HR-CD-T
D601	8-719-077-09 s	DIODE CL-196HR-CD-T
D602	8-719-077-09 s	DIODE CL-196HR-CD-T
D603	8-719-074-31 s	DIODE CL-196YG-CD-T
D604	8-719-056-48 s	DIODE 1SS388(TPL3)
D605	6-500-750-01 s	DIODE NSAD500H-T1-A
D1300	8-719-074-31 s	DIODE CL-196YG-CD-T
D1301	8-719-074-31 s	DIODE CL-196YG-CD-T
D1302	8-719-074-31 s	DIODE CL-196YG-CD-T
D1303	8-719-074-31 s	DIODE CL-196YG-CD-T
D1304	8-719-074-31 s	DIODE CL-196YG-CD-T
D1305	8-719-074-31 s	DIODE CL-196YG-CD-T
D1500	6-500-701-01 s	DIODE PGB1010603NR
D1501	6-500-701-01 s	DIODE PGB1010603NR
D1502	6-500-701-01 s	DIODE PGB1010603NR
E1	1-535-877-22 s	CHIP, CHECKER
E2	1-535-877-22 s	CHIP, CHECKER
E3	1-535-877-22 s	CHIP, CHECKER
E4	1-535-877-22 s	CHIP, CHECKER

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
E5	1-535-877-22	s	CHIP, CHECKER
E6	1-535-877-22	s	CHIP, CHECKER
FB1	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB10	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB11	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB200	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB201	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB202	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB300	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB301	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB302	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB400	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB500	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB501	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB800	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1101	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1200	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1201	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1203	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1204	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1300	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1301	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1302	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB1500	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1501	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1502	1-400-462-21	s	FERRITE, EMI (SMD) (1005)
FB1503	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-706-220-01	s	IC LTC3411EMS#TR
IC2	6-706-220-01	s	IC LTC3411EMS#TR
IC3	6-706-220-01	s	IC LTC3411EMS#TR
IC8	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC10	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC11	6-703-976-01	s	IC R1114Q181D-TR-FA
IC100	8-759-592-50	s	IC TC7SZ126FU (TE85R)
IC101	8-759-592-50	s	IC TC7SZ126FU (TE85R)
IC201	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC202	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC203	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC204	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC300	8-759-658-90	s	IC 24LC128T-I/SNG
IC301	8-759-598-44	s	IC TC7WH08FK (TE85R)
IC302	8-759-598-44	s	IC TC7WH08FK (TE85R)
IC303	8-759-592-50	s	IC TC7SZ126FU (TE85R)
IC304	8-759-598-44	s	IC TC7WH08FK (TE85R)
IC305	6-708-277-01	s	IC CDCVF25081PWR
IC306	6-708-277-01	s	IC CDCVF25081PWR
IC308	8-759-598-44	s	IC TC7WH08FK (TE85R)
IC309	6-702-879-01	s	IC R3112N281A-TR-FA
IC311	8-759-655-22	s	IC TC7WH34FK (TE85R)
IC400	6-706-220-01	s	IC LTC3411EMS#TR
IC401	6-703-976-01	s	IC R1114Q181D-TR-FA
IC501	8-759-691-76	s	IC SN74LVCHR16245AGR

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
IC502	8-759-691-76	s	IC SN74LVCHR16245AGR
IC503	8-759-691-76	s	IC SN74LVCHR16245AGR
IC504	8-759-691-76	s	IC SN74LVCHR16245AGR
IC507	6-711-402-01	s	IC MB85R256HPFTN
IC508	8-759-691-76	s	IC SN74LVCHR16245AGR
IC509	6-706-489-01	s	IC TC7SH32FU (T5RSOYJF)
IC510	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC601	6-703-567-01	o	IC TSB41AB2 PAP
IC602	8-759-698-08	s	IC SN74CBTLV1G125DCKR
IC700	8-759-695-88	s	IC SN74CBTLV16211GR
IC701	8-759-695-88	s	IC SN74CBTLV16211GR
IC851	8-759-651-59	s	IC SN74CBTLV3245APWR
IC852	8-759-651-59	s	IC SN74CBTLV3245APWR
IC853	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC854	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC855	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC1200	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC1201	6-702-879-01	s	IC R3112N281A-TR-FA
IC1202	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC1203	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC1204	6-703-875-01	s	IC CDCVF2505PWR
IC1205	6-703-875-01	s	IC CDCVF2505PWR
IC1206	8-759-592-44	s	IC TC7SZ04FU (TE85R)
IC1207	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC1208	8-759-592-49	s	IC TC7SZ125FU (TE85R)
IC1209	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC1210	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
IC1211	6-702-879-01	s	IC R3112N281A-TR-FA
IC1301	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1302	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1303	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1304	6-712-755-01	s	IC MT48LC32M16A2P-75IT
IC1305	6-706-487-01	s	IC TC7SH08FU (T5RSOYJF)
IC1401	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1402	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1403	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1404	8-759-691-76	s	IC SN74LVCHR16245AGR
IC1501	6-702-024-01	s	IC MIC2026-2YM TR
IC1503	6-706-484-01	s	IC TC7SH04FU (T5RSOYJF)
L1	1-400-870-21	s	COIL, CHOKE 2.2UH
L2	1-400-870-21	s	COIL, CHOKE 2.2UH
L3	1-400-870-21	s	COIL, CHOKE 2.2UH
L400	1-400-870-21	s	COIL, CHOKE 2.2UH
L600	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q1	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q400	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q401	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q500	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q851	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q852	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q853	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q854	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q855	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q856	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q857	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q1200	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
Q1201	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q1400	8-729-928-28	s TRANSISTOR DTA144EE-TL
R3	1-208-911-81	s RES, CHIP 10K (1005)
R6	1-208-947-81	s RES, CHIP 330K (1005)
R7	1-208-911-81	s RES, CHIP 10K (1005)
R8	1-208-935-81	s RES, CHIP 100K (1005)
R9	1-208-911-81	s RES, CHIP 10K (1005)
R10	1-208-947-81	s RES, CHIP 330K (1005)
R11	1-208-935-81	s RES, CHIP 100K (1005)
R12	1-208-935-81	s RES, CHIP 100K (1005)
R13	1-208-935-81	s RES, CHIP 100K (1005)
R14	1-208-935-81	s RES, CHIP 100K (1005)
R15	1-208-911-81	s RES, CHIP 10K (1005)
R16	1-208-935-81	s RES, CHIP 100K (1005)
R19	1-208-911-81	s RES, CHIP 10K (1005)
R20	1-208-947-81	s RES, CHIP 330K (1005)
R21	1-208-935-81	s RES, CHIP 100K (1005)
R22	1-208-927-81	s RES, CHIP 47K (1005)
R100	1-218-990-81	s CONDUCTOR, CHIP (1005)
R101	1-220-878-81	s RES, CHIP 22 (1005)
R200	1-208-887-81	s RES, CHIP 1.0K (1005)
R201	1-208-863-81	s RES, CHIP 100 (1005)
R202	1-208-863-81	s RES, CHIP 100 (1005)
R204	1-208-911-81	s RES, CHIP 10K (1005)
R206	1-208-911-81	s RES, CHIP 10K (1005)
R207	1-208-911-81	s RES, CHIP 10K (1005)
R209	1-220-878-81	s RES, CHIP 22 (1005)
R210	1-220-878-81	s RES, CHIP 22 (1005)
R211	1-220-878-81	s RES, CHIP 22 (1005)
R212	1-208-911-81	s RES, CHIP 10K (1005)
R213	1-208-911-81	s RES, CHIP 10K (1005)
R214	1-208-911-81	s RES, CHIP 10K (1005)
R215	1-208-911-81	s RES, CHIP 10K (1005)
R216	1-208-911-81	s RES, CHIP 10K (1005)
R217	1-208-911-81	s RES, CHIP 10K (1005)
R218	1-208-911-81	s RES, CHIP 10K (1005)
R219	1-208-911-81	s RES, CHIP 10K (1005)
R220	1-208-911-81	s RES, CHIP 10K (1005)
R221	1-208-911-81	s RES, CHIP 10K (1005)
R222	1-208-911-81	s RES, CHIP 10K (1005)
R223	1-208-911-81	s RES, CHIP 10K (1005)
R224	1-208-911-81	s RES, CHIP 10K (1005)
R225	1-220-870-81	s RES, CHIP 10 (1005)
R226	1-220-870-81	s RES, CHIP 10 (1005)
R227	1-208-855-81	s RES, CHIP 47 (1005)
R228	1-220-878-81	s RES, CHIP 22 (1005)
R229	1-208-911-81	s RES, CHIP 10K (1005)
R230	1-208-911-81	s RES, CHIP 10K (1005)
R231	1-208-911-81	s RES, CHIP 10K (1005)
R232	1-208-911-81	s RES, CHIP 10K (1005)
R233	1-208-911-81	s RES, CHIP 10K (1005)
R234	1-208-911-81	s RES, CHIP 10K (1005)
R235	1-208-911-81	s RES, CHIP 10K (1005)
R236	1-208-911-81	s RES, CHIP 10K (1005)
R237	1-208-911-81	s RES, CHIP 10K (1005)
R238	1-208-911-81	s RES, CHIP 10K (1005)
R239	1-208-911-81	s RES, CHIP 10K (1005)
R240	1-208-911-81	s RES, CHIP 10K (1005)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R241	1-208-911-81	s RES, CHIP 10K (1005)
R242	1-208-911-81	s RES, CHIP 10K (1005)
R244	1-220-870-81	s RES, CHIP 10 (1005)
R245	1-220-870-81	s RES, CHIP 10 (1005)
R246	1-218-990-81	s CONDUCTOR, CHIP (1005)
R247	1-208-903-81	s RES, CHIP 4.7K (1005)
R248	1-208-855-81	s RES, CHIP 47 (1005)
R249	1-220-878-81	s RES, CHIP 22 (1005)
R250	1-220-878-81	s RES, CHIP 22 (1005)
R251	1-208-911-81	s RES, CHIP 10K (1005)
R252	1-220-878-81	s RES, CHIP 22 (1005)
R253	1-208-911-81	s RES, CHIP 10K (1005)
R254	1-208-911-81	s RES, CHIP 10K (1005)
R255	1-208-911-81	s RES, CHIP 10K (1005)
R256	1-208-911-81	s RES, CHIP 10K (1005)
R257	1-208-911-81	s RES, CHIP 10K (1005)
R258	1-208-911-81	s RES, CHIP 10K (1005)
R259	1-208-911-81	s RES, CHIP 10K (1005)
R260	1-208-911-81	s RES, CHIP 10K (1005)
R261	1-208-911-81	s RES, CHIP 10K (1005)
R262	1-208-911-81	s RES, CHIP 10K (1005)
R263	1-208-911-81	s RES, CHIP 10K (1005)
R264	1-220-878-81	s RES, CHIP 22 (1005)
R265	1-220-878-81	s RES, CHIP 22 (1005)
R266	1-220-878-81	s RES, CHIP 22 (1005)
R267	1-220-878-81	s RES, CHIP 22 (1005)
R268	1-220-878-81	s RES, CHIP 22 (1005)
R269	1-220-878-81	s RES, CHIP 22 (1005)
R270	1-220-878-81	s RES, CHIP 22 (1005)
R271	1-220-878-81	s RES, CHIP 22 (1005)
R272	1-220-878-81	s RES, CHIP 22 (1005)
R273	1-220-878-81	s RES, CHIP 22 (1005)
R274	1-220-878-81	s RES, CHIP 22 (1005)
R275	1-220-878-81	s RES, CHIP 22 (1005)
R276	1-220-878-81	s RES, CHIP 22 (1005)
R277	1-220-878-81	s RES, CHIP 22 (1005)
R278	1-220-878-81	s RES, CHIP 22 (1005)
R279	1-220-878-81	s RES, CHIP 22 (1005)
R280	1-220-878-81	s RES, CHIP 22 (1005)
R281	1-220-878-81	s RES, CHIP 22 (1005)
R282	1-220-878-81	s RES, CHIP 22 (1005)
R283	1-220-878-81	s RES, CHIP 22 (1005)
R284	1-220-878-81	s RES, CHIP 22 (1005)
R285	1-220-878-81	s RES, CHIP 22 (1005)
R286	1-220-878-81	s RES, CHIP 22 (1005)
R287	1-208-887-81	s RES, CHIP 1.0K (1005)
R288	1-220-882-81	s RES, CHIP 33 (1005)
R289	1-208-887-81	s RES, CHIP 1.0K (1005)
R290	1-220-882-81	s RES, CHIP 33 (1005)
R291	1-208-887-81	s RES, CHIP 1.0K (1005)
R292	1-220-882-81	s RES, CHIP 33 (1005)
R293	1-208-887-81	s RES, CHIP 1.0K (1005)
R294	1-220-882-81	s RES, CHIP 33 (1005)
R295	1-220-878-81	s RES, CHIP 22 (1005)
R296	1-220-878-81	s RES, CHIP 22 (1005)
R300	1-208-911-81	s RES, CHIP 10K (1005)
R301	1-218-990-81	s CONDUCTOR, CHIP (1005)
R306	1-218-990-81	s CONDUCTOR, CHIP (1005)
R307	1-218-990-81	s CONDUCTOR, CHIP (1005)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R308	1-220-878-81	s RES, CHIP 22 (1005)
R309	1-220-878-81	s RES, CHIP 22 (1005)
R310	1-220-878-81	s RES, CHIP 22 (1005)
R311	1-220-878-81	s RES, CHIP 22 (1005)
R312	1-220-878-81	s RES, CHIP 22 (1005)
R313	1-220-878-81	s RES, CHIP 22 (1005)
R314	1-220-878-81	s RES, CHIP 22 (1005)
R315	1-218-990-81	s CONDUCTOR, CHIP (1005)
R316	1-220-878-81	s RES, CHIP 22 (1005)
R317	1-220-878-81	s RES, CHIP 22 (1005)
R318	1-208-911-81	s RES, CHIP 10K (1005)
R319	1-208-895-81	s RES, CHIP 2.2K (1005)
R320	1-208-895-81	s RES, CHIP 2.2K (1005)
R324	1-208-911-81	s RES, CHIP 10K (1005)
R325	1-208-911-81	s RES, CHIP 10K (1005)
R326	1-208-911-81	s RES, CHIP 10K (1005)
R328	1-220-878-81	s RES, CHIP 22 (1005)
R329	1-220-878-81	s RES, CHIP 22 (1005)
R330	1-220-878-81	s RES, CHIP 22 (1005)
R331	1-220-878-81	s RES, CHIP 22 (1005)
R332	1-220-878-81	s RES, CHIP 22 (1005)
R338	1-208-911-81	s RES, CHIP 10K (1005)
R339	1-208-911-81	s RES, CHIP 10K (1005)
R340	1-220-878-81	s RES, CHIP 22 (1005)
R341	1-220-878-81	s RES, CHIP 22 (1005)
R343	1-220-878-81	s RES, CHIP 22 (1005)
R346	1-208-935-81	s RES, CHIP 100K (1005)
R347	1-220-870-81	s RES, CHIP 10 (1005)
R348	1-208-935-81	s RES, CHIP 100K (1005)
R349	1-218-990-81	s CONDUCTOR, CHIP (1005)
R350	1-220-870-81	s RES, CHIP 10 (1005)
R351	1-220-870-81	s RES, CHIP 10 (1005)
R352	1-220-870-81	s RES, CHIP 10 (1005)
R353	1-220-870-81	s RES, CHIP 10 (1005)
R354	1-220-870-81	s RES, CHIP 10 (1005)
R355	1-218-990-81	s CONDUCTOR, CHIP (1005)
R356	1-218-990-81	s CONDUCTOR, CHIP (1005)
R357	1-218-990-81	s CONDUCTOR, CHIP (1005)
R358	1-220-870-81	s RES, CHIP 10 (1005)
R359	1-218-990-81	s CONDUCTOR, CHIP (1005)
R360	1-218-990-81	s CONDUCTOR, CHIP (1005)
R361	1-218-990-81	s CONDUCTOR, CHIP (1005)
R362	1-218-990-81	s CONDUCTOR, CHIP (1005)
R363	1-218-990-81	s CONDUCTOR, CHIP (1005)
R364	1-218-990-81	s CONDUCTOR, CHIP (1005)
R402	1-208-911-81	s RES, CHIP 10K (1005)
R403	1-208-911-81	s RES, CHIP 10K (1005)
R404	1-208-935-81	s RES, CHIP 100K (1005)
R405	1-208-911-81	s RES, CHIP 10K (1005)
R406	1-208-947-81	s RES, CHIP 330K (1005)
R407	1-208-935-81	s RES, CHIP 100K (1005)
R408	1-208-911-81	s RES, CHIP 10K (1005)
R409	1-208-935-81	s RES, CHIP 100K (1005)
R500	1-208-903-81	s RES, CHIP 4.7K (1005)
R501	1-208-911-81	s RES, CHIP 10K (1005)
R502	1-208-911-81	s RES, CHIP 10K (1005)
R503	1-208-911-81	s RES, CHIP 10K (1005)
R504	1-218-990-81	s CONDUCTOR, CHIP (1005)
R505	1-208-887-81	s RES, CHIP 1.0K (1005)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R506	1-208-887-81	s RES, CHIP 1.0K (1005)
R507	1-218-990-81	s CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s CONDUCTOR, CHIP (1005)
R509	1-220-878-81	s RES, CHIP 22 (1005)
R510	1-220-878-81	s RES, CHIP 22 (1005)
R511	1-208-903-81	s RES, CHIP 4.7K (1005)
R512	1-218-990-81	s CONDUCTOR, CHIP (1005)
R513	1-220-878-81	s RES, CHIP 22 (1005)
R514	1-218-990-81	s CONDUCTOR, CHIP (1005)
R515	1-208-903-81	s RES, CHIP 4.7K (1005)
R516	1-208-903-81	s RES, CHIP 4.7K (1005)
R517	1-208-903-81	s RES, CHIP 4.7K (1005)
R518	1-218-990-81	s CONDUCTOR, CHIP (1005)
R519	1-220-878-81	s RES, CHIP 22 (1005)
R521	1-218-990-81	s CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s CONDUCTOR, CHIP (1005)
R525	1-218-990-81	s CONDUCTOR, CHIP (1005)
R528	1-220-870-81	s RES, CHIP 10 (1005)
R530	1-208-911-81	s RES, CHIP 10K (1005)
R531	1-208-911-81	s RES, CHIP 10K (1005)
R532	1-208-911-81	s RES, CHIP 10K (1005)
R534	1-218-990-81	s CONDUCTOR, CHIP (1005)
R536	1-208-911-81	s RES, CHIP 10K (1005)
R537	1-218-990-81	s CONDUCTOR, CHIP (1005)
R538	1-218-990-81	s CONDUCTOR, CHIP (1005)
R539	1-218-990-81	s CONDUCTOR, CHIP (1005)
R543	1-208-911-81	s RES, CHIP 10K (1005)
R545	1-208-855-81	s RES, CHIP 47 (1005)
R546	1-220-878-81	s RES, CHIP 22 (1005)
R547	1-220-878-81	s RES, CHIP 22 (1005)
R550	1-220-878-81	s RES, CHIP 22 (1005)
R600	1-220-878-81	s RES, CHIP 22 (1005)
R601	1-218-990-81	s CONDUCTOR, CHIP (1005)
R603	1-208-911-81	s RES, CHIP 10K (1005)
R604	1-208-911-81	s RES, CHIP 10K (1005)
R606	1-218-990-81	s CONDUCTOR, CHIP (1005)
R611	1-208-887-81	s RES, CHIP 1.0K (1005)
R613	1-208-911-81	s RES, CHIP 10K (1005)
R614	1-208-911-81	s RES, CHIP 10K (1005)
R617	1-208-857-81	s RES, CHIP 56 (1005)
R618	1-208-857-81	s RES, CHIP 56 (1005)
R619	1-208-911-81	s RES, CHIP 10K (1005)
R620	1-208-857-81	s RES, CHIP 56 (1005)
R621	1-208-911-81	s RES, CHIP 10K (1005)
R622	1-208-857-81	s RES, CHIP 56 (1005)
R623	1-208-892-81	s RES, CHIP 1.6K (1005)
R624	1-208-903-81	s RES, CHIP 4.7K (1005)
R626	1-208-857-81	s RES, CHIP 56 (1005)
R627	1-208-857-81	s RES, CHIP 56 (1005)
R628	1-208-857-81	s RES, CHIP 56 (1005)
R629	1-208-911-81	s RES, CHIP 10K (1005)
R630	1-208-857-81	s RES, CHIP 56 (1005)
R631	1-208-911-81	s RES, CHIP 10K (1005)
R634	1-208-947-81	s RES, CHIP 330K (1005)
R702	1-208-863-81	s RES, CHIP 100 (1005)
R803	1-208-875-81	s RES, CHIP 330 (1005)
R804	1-208-857-81	s RES, CHIP 56 (1005)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R806	1-208-857-81	s RES, CHIP 56 (1005)
R807	1-218-990-81	s CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s CONDUCTOR, CHIP (1005)
R814	1-208-911-81	s RES, CHIP 10K (1005)
R815	1-218-990-81	s CONDUCTOR, CHIP (1005)
R816	1-218-990-81	s CONDUCTOR, CHIP (1005)
R817	1-208-903-81	s RES, CHIP 4.7K (1005)
R851	1-208-935-81	s RES, CHIP 100K (1005)
R852	1-208-935-81	s RES, CHIP 100K (1005)
R853	1-208-935-81	s RES, CHIP 100K (1005)
R854	1-208-935-81	s RES, CHIP 100K (1005)
R855	1-208-935-81	s RES, CHIP 100K (1005)
R856	1-208-935-81	s RES, CHIP 100K (1005)
R857	1-208-911-81	s RES, CHIP 10K (1005)
R900	1-220-878-81	s RES, CHIP 22 (1005)
R901	1-220-878-81	s RES, CHIP 22 (1005)
R902	1-220-878-81	s RES, CHIP 22 (1005)
R905	1-208-863-81	s RES, CHIP 100 (1005)
R906	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1000	1-208-863-81	s RES, CHIP 100 (1005)
R1100	1-208-875-81	s RES, CHIP 330 (1005)
R1101	1-208-911-81	s RES, CHIP 10K (1005)
R1102	1-208-911-81	s RES, CHIP 10K (1005)
R1103	1-208-911-81	s RES, CHIP 10K (1005)
R1104	1-208-857-81	s RES, CHIP 56 (1005)
R1106	1-208-857-81	s RES, CHIP 56 (1005)
R1107	1-208-887-81	s RES, CHIP 1.0K (1005)
R1115	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1117	1-208-903-81	s RES, CHIP 4.7K (1005)
R1202	1-220-878-81	s RES, CHIP 22 (1005)
R1203	1-220-878-81	s RES, CHIP 22 (1005)
R1204	1-220-878-81	s RES, CHIP 22 (1005)
R1205	1-208-911-81	s RES, CHIP 10K (1005)
R1207	1-220-870-81	s RES, CHIP 10 (1005)
R1208	1-220-870-81	s RES, CHIP 10 (1005)
R1209	1-220-878-81	s RES, CHIP 22 (1005)
R1210	1-220-878-81	s RES, CHIP 22 (1005)
R1212	1-220-870-81	s RES, CHIP 10 (1005)
R1213	1-220-870-81	s RES, CHIP 10 (1005)
R1214	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1215	1-208-903-81	s RES, CHIP 4.7K (1005)
R1216	1-220-878-81	s RES, CHIP 22 (1005)
R1217	1-220-878-81	s RES, CHIP 22 (1005)
R1218	1-220-878-81	s RES, CHIP 22 (1005)
R1219	1-208-911-81	s RES, CHIP 10K (1005)
R1220	1-208-911-81	s RES, CHIP 10K (1005)
R1221	1-208-911-81	s RES, CHIP 10K (1005)
R1222	1-208-911-81	s RES, CHIP 10K (1005)
R1223	1-208-911-81	s RES, CHIP 10K (1005)
R1224	1-208-911-81	s RES, CHIP 10K (1005)
R1225	1-208-911-81	s RES, CHIP 10K (1005)
R1226	1-208-911-81	s RES, CHIP 10K (1005)
R1227	1-208-911-81	s RES, CHIP 10K (1005)
R1228	1-208-911-81	s RES, CHIP 10K (1005)
R1229	1-208-911-81	s RES, CHIP 10K (1005)
R1230	1-208-911-81	s RES, CHIP 10K (1005)
R1231	1-208-855-81	s RES, CHIP 47 (1005)
R1232	1-208-911-81	s RES, CHIP 10K (1005)
R1233	1-218-990-81	s CONDUCTOR, CHIP (1005)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
R1234	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1235	1-220-870-81	s RES, CHIP 10 (1005)
R1237	1-220-878-81	s RES, CHIP 22 (1005)
R1238	1-220-878-81	s RES, CHIP 22 (1005)
R1239	1-220-878-81	s RES, CHIP 22 (1005)
R1241	1-208-887-81	s RES, CHIP 1.0K (1005)
R1242	1-220-878-81	s RES, CHIP 22 (1005)
R1243	1-220-878-81	s RES, CHIP 22 (1005)
R1245	1-208-911-81	s RES, CHIP 10K (1005)
R1246	1-208-887-81	s RES, CHIP 1.0K (1005)
R1248	1-220-878-81	s RES, CHIP 22 (1005)
R1249	1-208-911-81	s RES, CHIP 10K (1005)
R1250	1-220-878-81	s RES, CHIP 22 (1005)
R1251	1-208-911-81	s RES, CHIP 10K (1005)
R1252	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1253	1-208-911-81	s RES, CHIP 10K (1005)
R1300	1-208-911-81	s RES, CHIP 10K (1005)
R1301	1-220-878-81	s RES, CHIP 22 (1005)
R1303	1-208-911-81	s RES, CHIP 10K (1005)
R1304	1-208-911-81	s RES, CHIP 10K (1005)
R1305	1-208-911-81	s RES, CHIP 10K (1005)
R1306	1-208-911-81	s RES, CHIP 10K (1005)
R1307	1-208-911-81	s RES, CHIP 10K (1005)
R1308	1-208-911-81	s RES, CHIP 10K (1005)
R1309	1-208-879-81	s RES, CHIP 470 (1005)
R1310	1-208-879-81	s RES, CHIP 470 (1005)
R1311	1-208-879-81	s RES, CHIP 470 (1005)
R1312	1-220-878-81	s RES, CHIP 22 (1005)
R1313	1-208-879-81	s RES, CHIP 470 (1005)
R1314	1-208-879-81	s RES, CHIP 470 (1005)
R1315	1-208-879-81	s RES, CHIP 470 (1005)
R1316	1-220-878-81	s RES, CHIP 22 (1005)
R1317	1-220-878-81	s RES, CHIP 22 (1005)
R1318	1-220-878-81	s RES, CHIP 22 (1005)
R1319	1-220-878-81	s RES, CHIP 22 (1005)
R1320	1-220-878-81	s RES, CHIP 22 (1005)
R1321	1-220-878-81	s RES, CHIP 22 (1005)
R1322	1-208-911-81	s RES, CHIP 10K (1005)
R1323	1-208-911-81	s RES, CHIP 10K (1005)
R1324	1-208-911-81	s RES, CHIP 10K (1005)
R1325	1-208-903-81	s RES, CHIP 4.7K (1005)
R1326	1-208-903-81	s RES, CHIP 4.7K (1005)
R1327	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1328	1-208-887-81	s RES, CHIP 1.0K (1005)
R1329	1-220-878-81	s RES, CHIP 22 (1005)
R1330	1-208-887-81	s RES, CHIP 1.0K (1005)
R1331	1-220-878-81	s RES, CHIP 22 (1005)
R1332	1-208-887-81	s RES, CHIP 1.0K (1005)
R1333	1-220-878-81	s RES, CHIP 22 (1005)
R1334	1-208-887-81	s RES, CHIP 1.0K (1005)
R1335	1-220-878-81	s RES, CHIP 22 (1005)
R1336	1-208-911-81	s RES, CHIP 10K (1005)
R1337	1-220-878-81	s RES, CHIP 22 (1005)
R1338	1-220-878-81	s RES, CHIP 22 (1005)
R1339	1-220-878-81	s RES, CHIP 22 (1005)
R1340	1-220-878-81	s RES, CHIP 22 (1005)
R1400	1-208-911-81	s RES, CHIP 10K (1005)
R1401	1-208-911-81	s RES, CHIP 10K (1005)
R1402	1-208-911-81	s RES, CHIP 10K (1005)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP	Description
RB300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB303	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB305	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB306	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB307	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB308	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB309	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB310	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB311	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB312	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB500	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB533	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB534	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB535	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB536	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB537	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB538	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB539	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB544	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB545	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB546	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB547	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB548	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB549	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB550	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB600	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1203	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1204	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1205	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1206	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1213	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1214	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1215	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1216	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1217	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1223	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1224	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1225	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1228	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(SY-355 BOARD (suffix 11))

Ref. No. or Q'ty	Part No.	SP Description
RB1229	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1230	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1231	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1232	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1233	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1235	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1236	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1237	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1238	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1239	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1240	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1241	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1304	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1308	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1309	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1310	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1311	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1312	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1313	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1314	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1315	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1316	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1317	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1318	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB1400	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1422	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1424	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1425	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1426	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1427	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1428	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1429	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1431	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1432	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1433	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1434	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1435	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1436	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB1437	1-234-370-21	s RES, NETWORK 22 (1005X4)
S200	1-771-721-21	s SWITCH, TACTILE
S300	1-692-271-41	s SWITCH, SLIDE
S301	1-771-721-21	s SWITCH, TACTILE
S1200	1-771-721-21	s SWITCH, TACTILE
S1201	1-771-721-21	s SWITCH, TACTILE
S1301	1-692-271-41	s SWITCH, SLIDE
X300	1-813-824-11	s OSCILLATOR, CRYSTAL
X600	1-813-049-21	s VIBRATOR, CRYSTAL (24.576 MHz)
X1500	1-813-345-21	s VIBRATOR, CRYSTAL (30 MHz)

SY-355 BOARD (suffix 12)

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1538-888-A	s MOUNTED CIRCUIT BOARD, SY-355
C2	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C7	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C8	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C9	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C10	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C11	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C12	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C13	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C14	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C15	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C16	1-164-866-81	s CAP, CHIP CERAMIC 47PF CH 1005
C17	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C18	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C19	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C20	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C100	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C202	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C203	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C204	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C205	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C206	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C207	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C209	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C210	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C211	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C212	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C213	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C214	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C215	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C216	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C217	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C218	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C219	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C220	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C221	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C222	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C223	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C224	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C225	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C226	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C227	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C228	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C229	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C230	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C231	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C232	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C233	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C234	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C300	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C301	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C303	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C304	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C305	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C448	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C449	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C450	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C451	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C452	1-164-866-81	s	CAP, CHIP CERAMIC 47PF CH 1005
C453	1-112-692-81	s	CAP,CHIP CERAMIC1000PF CH 1005
C454	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C455	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C456	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C457	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C506	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C509	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C510	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C511	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C512	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C513	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C514	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C515	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C516	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C517	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C518	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C519	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C520	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C521	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C522	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C524	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C525	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C526	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C527	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C528	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C529	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C530	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C531	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C532	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C533	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C534	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C535	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C536	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C600	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C601	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C602	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C603	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C604	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C605	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C606	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C607	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C608	1-164-850-81	s	CAP, CHIP CERAMIC 10PF CH 1005
C610	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C612	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C613	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C614	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C615	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C616	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C617	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C618	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C852	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C853	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C854	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C900	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C901	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C902	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C903	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C904	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C905	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C906	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C907	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C908	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C909	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C910	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C911	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C912	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C913	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1000	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1001	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1002	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1003	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1004	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1005	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1006	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1007	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1008	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1009	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1010	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1011	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1012	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1013	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1100	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1101	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1102	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1103	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1104	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1105	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1106	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1107	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1108	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1109	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1110	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1111	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1112	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1113	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1114	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1115	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1116	1-100-567-81	s	CAP,CHIP CERAMIC 0.01MF B 1005
C1200	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1201	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1202	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1203	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1204	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1205	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1206	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1207	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1208	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1209	1-107-819-81	s	CAP,CHIP CERAMIC 22000PF B1005
C1210	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
C1354	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1355	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1356	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1357	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1358	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1359	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1360	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1361	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1362	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1363	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1364	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1365	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1366	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1367	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1368	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1369	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1370	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1371	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1372	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1373	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1374	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1375	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1376	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1377	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1378	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1379	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1380	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1381	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1382	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1383	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1404	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1405	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1406	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1407	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1408	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1409	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1410	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1411	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1412	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1413	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1414	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1415	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1416	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1417	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1420	1-100-611-91	s	CAP, CERAMIC 22MF C (2012)
C1421	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1422	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1423	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1424	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1425	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1500	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1501	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1502	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1503	1-112-300-91	s	CAP, CERAMIC 4.7MF B (2012)
C1504	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1505	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1506	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1507	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005
C1508	1-125-777-81	s	CAP, CHIP CERAMIC 0.1MF B 1005

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
C1509	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1510	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1511	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1512	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1513	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1514	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1515	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1516	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1517	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1518	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1519	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1520	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C1521	1-100-611-91	s CAP, CERAMIC 22MF C (2012)
C1522	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C1523	1-164-850-81	s CAP, CHIP CERAMIC 10PF CH 1005
C1524	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1526	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
C1527	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C1530	1-100-880-91	s CAP, CERAMIC 100MF C (3225)
CN200	1-764-099-21	s PIN, CONNECTOR (PC BOARD) 14P
CN300	1-580-057-21	s PIN, CONNECTOR (SMD) 4P
CN301	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
CN500	1-770-627-21	s PIN, CONNECTOR 10P
CN501	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P
CN502	1-779-522-31	s CONNECTOR, FFC/FPC(ZIF) AN 40P
CN600	1-691-551-21	o PIN, CONNECTOR (SMD) 8P
CN1200	1-764-099-21	s PIN, CONNECTOR (PC BOARD) 14P
CN1300	1-794-142-31	s CONNECTOR, FFC/FPC(ZIF) AN 36P
CN1301	1-580-057-21	s PIN, CONNECTOR (SMD) 4P
CN1400	1-770-627-21	s PIN, CONNECTOR 10P
CN1401	1-770-453-21	o CONNECTOR, BOARD TO BOARD 70P
CN1500	1-569-775-21	o PIN, CONNECTOR (SMD) 5P
D1	8-719-074-31	s DIODE CL-196YG-CD-T
D300	8-719-074-31	s DIODE CL-196YG-CD-T
D301	8-719-074-31	s DIODE CL-196YG-CD-T
D302	8-719-074-31	s DIODE CL-196YG-CD-T
D303	8-719-074-31	s DIODE CL-196YG-CD-T
D500	8-719-074-31	s DIODE CL-196YG-CD-T
D501	8-719-074-31	s DIODE CL-196YG-CD-T
D600	8-719-077-09	s DIODE CL-196HR-CD-T
D601	8-719-077-09	s DIODE CL-196HR-CD-T
D602	8-719-077-09	s DIODE CL-196HR-CD-T
D603	8-719-074-31	s DIODE CL-196YG-CD-T
D604	8-719-056-48	s DIODE 1SS388 (TPL3)
D605	6-500-750-01	s DIODE NSAD500H-T1-AT
D1300	8-719-074-31	s DIODE CL-196YG-CD-T
D1301	8-719-074-31	s DIODE CL-196YG-CD-T
D1302	8-719-074-31	s DIODE CL-196YG-CD-T
D1303	8-719-074-31	s DIODE CL-196YG-CD-T
D1304	8-719-074-31	s DIODE CL-196YG-CD-T
D1305	8-719-074-31	s DIODE CL-196YG-CD-T
D1500	6-500-701-01	s DIODE PGB1010603NR
D1501	6-500-701-01	s DIODE PGB1010603NR
D1502	6-500-701-01	s DIODE PGB1010603NR
E1	1-535-877-22	s CHIP, CHECKER
E2	1-535-877-22	s CHIP, CHECKER
E3	1-535-877-22	s CHIP, CHECKER
E4	1-535-877-22	s CHIP, CHECKER

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
E5	1-535-877-22	s CHIP, CHECKER
E6	1-535-877-22	s CHIP, CHECKER
FB1	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB10	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB11	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB200	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB201	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB202	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB300	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB301	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB302	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB400	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB401	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB402	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB500	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB501	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB800	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB801	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB802	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1100	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1101	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1200	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1201	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1202	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1203	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1204	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1300	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1301	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1302	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB1500	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1501	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1502	1-400-462-21	s FERRITE, EMI (SMD) (1005)
FB1503	1-414-864-21	s FERRITE, EMI (SMD) (1608)
IC1	6-706-220-01	s IC LTC3411EMS#TR
IC2	6-706-220-01	s IC LTC3411EMS#TR
IC3	6-706-220-01	s IC LTC3411EMS#TR
IC8	6-706-484-01	s IC TC7SH04FU(T5RSOYJF)
IC10	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC11	6-703-976-01	s IC R1114Q181D-TR-FA
IC100	8-759-592-50	s IC TC7SZ126FU(TE85R)
IC101	8-759-592-50	s IC TC7SZ126FU(TE85R)
IC201	6-712-755-01	s IC MT48LC32M16A2P-75IT
IC202	6-712-755-01	s IC MT48LC32M16A2P-75IT
IC203	6-712-755-01	s IC MT48LC32M16A2P-75IT
IC204	6-712-755-01	s IC MT48LC32M16A2P-75IT
IC300	8-759-658-90	s IC 24LC128T-I/SNG
IC301	8-759-598-44	s IC TC7WH08FK(TE85R)
IC302	8-759-598-44	s IC TC7WH08FK(TE85R)
IC303	8-759-592-50	s IC TC7SZ126FU(TE85R)
IC304	8-759-598-44	s IC TC7WH08FK(TE85R)
IC305	6-708-277-01	s IC CDCVF25081PWR
IC306	6-708-277-01	s IC CDCVF25081PWR
IC308	8-759-598-44	s IC TC7WH08FK(TE85R)
IC309	6-702-879-01	s IC R3112N281A-TR-FA
IC311	8-759-655-22	s IC TC7WH34FK(TE85R)
IC400	6-706-220-01	s IC LTC3411EMS#TR
IC401	6-703-976-01	s IC R1114Q181D-TR-FA

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
IC501	8-759-691-76	s IC	SN74LVCHR16245AGR
IC502	8-759-691-76	s IC	SN74LVCHR16245AGR
IC503	8-759-691-76	s IC	SN74LVCHR16245AGR
IC504	8-759-691-76	s IC	SN74LVCHR16245AGR
IC507	6-711-402-01	s IC	MB85R256HPFTN
IC508	8-759-691-76	s IC	SN74LVCHR16245AGR
IC509	6-706-489-01	s IC	TC7SH32FU(T5RSOYJF)
IC510	6-706-484-01	s IC	TC7SH04FU(T5RSOYJF)
IC601	6-703-567-01	o IC	TSB41AB2 PAP
IC602	8-759-698-08	s IC	SN74CBTLV1G125DCKR
IC700	8-759-695-88	s IC	SN74CBTLV16211GR
IC701	8-759-695-88	s IC	SN74CBTLV16211GR
IC851	8-759-651-59	s IC	SN74CBTLV3245APWR
IC852	8-759-651-59	s IC	SN74CBTLV3245APWR
IC853	6-706-484-01	s IC	TC7SH04FU(T5RSOYJF)
IC854	8-759-592-49	s IC	TC7SZ125FU(TE85R)
IC855	8-759-592-49	s IC	TC7SZ125FU(TE85R)
IC1200	6-706-487-01	s IC	TC7SH08FU(T5RSOYJF)
IC1201	6-702-879-01	s IC	R3112N281A-TR-FA
IC1202	6-706-484-01	s IC	TC7SH04FU(T5RSOYJF)
IC1203	6-706-487-01	s IC	TC7SH08FU(T5RSOYJF)
IC1204	6-703-875-01	s IC	CDCVF2505PWR
IC1205	6-703-875-01	s IC	CDCVF2505PWR
IC1206	8-759-592-50	s IC	TC7SZ126FU(TE85R)
IC1207	6-706-487-01	s IC	TC7SH08FU(T5RSOYJF)
IC1208	8-759-592-49	s IC	TC7SZ125FU(TE85R)
IC1209	6-706-484-01	s IC	TC7SH04FU(T5RSOYJF)
IC1210	6-706-484-01	s IC	TC7SH04FU(T5RSOYJF)
IC1211	6-702-879-01	s IC	R3112N281A-TR-FA
IC1301	6-712-755-01	s IC	MT48LC32M16A2P-75IT
IC1302	6-712-755-01	s IC	MT48LC32M16A2P-75IT
IC1303	6-712-755-01	s IC	MT48LC32M16A2P-75IT
IC1304	6-712-755-01	s IC	MT48LC32M16A2P-75IT
IC1305	6-706-487-01	s IC	TC7SH08FU(T5RSOYJF)
IC1401	8-759-691-76	s IC	SN74LVCHR16245AGR
IC1402	8-759-691-76	s IC	SN74LVCHR16245AGR
IC1403	8-759-691-76	s IC	SN74LVCHR16245AGR
IC1404	8-759-691-76	s IC	SN74LVCHR16245AGR
IC1501	6-702-024-01	s IC	MIC2026-2YM TR
L1	1-400-870-21	s	COIL, CHOKO 2.2UH
L2	1-400-870-21	s	COIL, CHOKO 2.2UH
L3	1-400-870-21	s	COIL, CHOKO 2.2UH
L400	1-400-870-21	s	COIL, CHOKO 2.2UH
L600	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
L601	1-414-398-41	s	INDUCTOR (SMD) 10.0UH
Q1	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q2	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q3	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q4	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q300	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q400	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q401	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q500	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q851	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q852	8-729-928-28	s	TRANSISTOR DTA144EE-TL
Q853	6-551-261-01	s	TRANSISTOR SI4804BDY-T1
Q854	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q855	8-729-928-82	s	TRANSISTOR DTC144EE-TL

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
Q856	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q857	6-550-832-01	s	TRANSISTOR SI2301BDS-T1
Q1200	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1201	8-729-928-82	s	TRANSISTOR DTC144EE-TL
Q1400	8-729-928-28	s	TRANSISTOR DTA144EE-TL
R3	1-208-911-81	s	RES, CHIP 10K (1005)
R6	1-208-947-81	s	RES, CHIP 330K (1005)
R7	1-208-911-81	s	RES, CHIP 10K (1005)
R8	1-208-935-81	s	RES, CHIP 100K (1005)
R9	1-208-911-81	s	RES, CHIP 10K (1005)
R10	1-208-947-81	s	RES, CHIP 330K (1005)
R11	1-208-935-81	s	RES, CHIP 100K (1005)
R12	1-208-935-81	s	RES, CHIP 100K (1005)
R13	1-208-935-81	s	RES, CHIP 100K (1005)
R14	1-208-935-81	s	RES, CHIP 100K (1005)
R15	1-208-911-81	s	RES, CHIP 10K (1005)
R16	1-208-935-81	s	RES, CHIP 100K (1005)
R19	1-208-911-81	s	RES, CHIP 10K (1005)
R20	1-208-947-81	s	RES, CHIP 330K (1005)
R21	1-208-935-81	s	RES, CHIP 100K (1005)
R22	1-208-927-81	s	RES, CHIP 47K (1005)
R23	1-208-911-81	s	RES, CHIP 10K (1005)
R24	1-208-887-81	s	RES, CHIP 1.0K (1005)
R100	1-218-990-81	s	CONDUCTOR, CHIP (1005)
R101	1-220-878-81	s	RES, CHIP 22 (1005)
R200	1-208-887-81	s	RES, CHIP 1.0K (1005)
R201	1-208-863-81	s	RES, CHIP 100 (1005)
R202	1-208-863-81	s	RES, CHIP 100 (1005)
R204	1-208-911-81	s	RES, CHIP 10K (1005)
R206	1-208-911-81	s	RES, CHIP 10K (1005)
R207	1-208-911-81	s	RES, CHIP 10K (1005)
R209	1-220-878-81	s	RES, CHIP 22 (1005)
R210	1-220-878-81	s	RES, CHIP 22 (1005)
R211	1-220-878-81	s	RES, CHIP 22 (1005)
R212	1-208-911-81	s	RES, CHIP 10K (1005)
R213	1-208-911-81	s	RES, CHIP 10K (1005)
R214	1-208-911-81	s	RES, CHIP 10K (1005)
R215	1-208-911-81	s	RES, CHIP 10K (1005)
R216	1-208-911-81	s	RES, CHIP 10K (1005)
R217	1-208-911-81	s	RES, CHIP 10K (1005)
R218	1-208-911-81	s	RES, CHIP 10K (1005)
R219	1-208-911-81	s	RES, CHIP 10K (1005)
R220	1-208-911-81	s	RES, CHIP 10K (1005)
R221	1-208-911-81	s	RES, CHIP 10K (1005)
R222	1-208-911-81	s	RES, CHIP 10K (1005)
R223	1-208-911-81	s	RES, CHIP 10K (1005)
R224	1-208-911-81	s	RES, CHIP 10K (1005)
R225	1-220-870-81	s	RES, CHIP 10 (1005)
R226	1-220-870-81	s	RES, CHIP 10 (1005)
R227	1-208-855-81	s	RES, CHIP 47 (1005)
R228	1-220-878-81	s	RES, CHIP 22 (1005)
R229	1-208-911-81	s	RES, CHIP 10K (1005)
R230	1-208-911-81	s	RES, CHIP 10K (1005)
R231	1-208-911-81	s	RES, CHIP 10K (1005)
R232	1-208-911-81	s	RES, CHIP 10K (1005)
R233	1-208-911-81	s	RES, CHIP 10K (1005)
R234	1-208-911-81	s	RES, CHIP 10K (1005)
R235	1-208-911-81	s	RES, CHIP 10K (1005)
R236	1-208-911-81	s	RES, CHIP 10K (1005)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R237	1-208-911-81 s	RES, CHIP 10K (1005)
R238	1-208-911-81 s	RES, CHIP 10K (1005)
R239	1-208-911-81 s	RES, CHIP 10K (1005)
R240	1-208-911-81 s	RES, CHIP 10K (1005)
R241	1-208-911-81 s	RES, CHIP 10K (1005)
R242	1-208-911-81 s	RES, CHIP 10K (1005)
R244	1-220-870-81 s	RES, CHIP 10 (1005)
R245	1-220-870-81 s	RES, CHIP 10 (1005)
R246	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R247	1-208-903-81 s	RES, CHIP 4.7K (1005)
R248	1-208-855-81 s	RES, CHIP 47 (1005)
R249	1-220-878-81 s	RES, CHIP 22 (1005)
R250	1-220-878-81 s	RES, CHIP 22 (1005)
R251	1-208-911-81 s	RES, CHIP 10K (1005)
R252	1-220-878-81 s	RES, CHIP 22 (1005)
R253	1-208-911-81 s	RES, CHIP 10K (1005)
R254	1-208-911-81 s	RES, CHIP 10K (1005)
R255	1-208-911-81 s	RES, CHIP 10K (1005)
R256	1-208-911-81 s	RES, CHIP 10K (1005)
R257	1-208-911-81 s	RES, CHIP 10K (1005)
R258	1-208-911-81 s	RES, CHIP 10K (1005)
R259	1-208-911-81 s	RES, CHIP 10K (1005)
R260	1-208-911-81 s	RES, CHIP 10K (1005)
R261	1-208-911-81 s	RES, CHIP 10K (1005)
R262	1-208-911-81 s	RES, CHIP 10K (1005)
R263	1-208-911-81 s	RES, CHIP 10K (1005)
R264	1-220-878-81 s	RES, CHIP 22 (1005)
R265	1-220-878-81 s	RES, CHIP 22 (1005)
R266	1-220-878-81 s	RES, CHIP 22 (1005)
R267	1-220-878-81 s	RES, CHIP 22 (1005)
R268	1-220-878-81 s	RES, CHIP 22 (1005)
R269	1-220-878-81 s	RES, CHIP 22 (1005)
R270	1-220-878-81 s	RES, CHIP 22 (1005)
R271	1-220-878-81 s	RES, CHIP 22 (1005)
R272	1-220-878-81 s	RES, CHIP 22 (1005)
R273	1-220-878-81 s	RES, CHIP 22 (1005)
R274	1-220-878-81 s	RES, CHIP 22 (1005)
R275	1-220-878-81 s	RES, CHIP 22 (1005)
R276	1-220-878-81 s	RES, CHIP 22 (1005)
R277	1-220-878-81 s	RES, CHIP 22 (1005)
R278	1-220-878-81 s	RES, CHIP 22 (1005)
R279	1-220-878-81 s	RES, CHIP 22 (1005)
R280	1-220-878-81 s	RES, CHIP 22 (1005)
R281	1-220-878-81 s	RES, CHIP 22 (1005)
R282	1-220-878-81 s	RES, CHIP 22 (1005)
R283	1-220-878-81 s	RES, CHIP 22 (1005)
R284	1-220-878-81 s	RES, CHIP 22 (1005)
R285	1-220-878-81 s	RES, CHIP 22 (1005)
R286	1-220-878-81 s	RES, CHIP 22 (1005)
R287	1-208-887-81 s	RES, CHIP 1.0K (1005)
R288	1-220-882-81 s	RES, CHIP 33 (1005)
R289	1-208-887-81 s	RES, CHIP 1.0K (1005)
R290	1-220-882-81 s	RES, CHIP 33 (1005)
R291	1-208-887-81 s	RES, CHIP 1.0K (1005)
R292	1-220-882-81 s	RES, CHIP 33 (1005)
R293	1-208-887-81 s	RES, CHIP 1.0K (1005)
R294	1-220-882-81 s	RES, CHIP 33 (1005)
R295	1-220-878-81 s	RES, CHIP 22 (1005)
R296	1-220-878-81 s	RES, CHIP 22 (1005)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R300	1-208-911-81 s	RES, CHIP 10K (1005)
R301	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R306	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R307	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R308	1-220-878-81 s	RES, CHIP 22 (1005)
R309	1-220-878-81 s	RES, CHIP 22 (1005)
R310	1-220-878-81 s	RES, CHIP 22 (1005)
R311	1-220-878-81 s	RES, CHIP 22 (1005)
R312	1-220-878-81 s	RES, CHIP 22 (1005)
R313	1-220-878-81 s	RES, CHIP 22 (1005)
R314	1-220-878-81 s	RES, CHIP 22 (1005)
R315	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R316	1-220-878-81 s	RES, CHIP 22 (1005)
R317	1-220-878-81 s	RES, CHIP 22 (1005)
R318	1-208-911-81 s	RES, CHIP 10K (1005)
R319	1-208-895-81 s	RES, CHIP 2.2K (1005)
R320	1-208-895-81 s	RES, CHIP 2.2K (1005)
R324	1-208-911-81 s	RES, CHIP 10K (1005)
R325	1-208-911-81 s	RES, CHIP 10K (1005)
R326	1-208-911-81 s	RES, CHIP 10K (1005)
R328	1-220-878-81 s	RES, CHIP 22 (1005)
R329	1-220-878-81 s	RES, CHIP 22 (1005)
R330	1-220-878-81 s	RES, CHIP 22 (1005)
R331	1-220-878-81 s	RES, CHIP 22 (1005)
R332	1-220-878-81 s	RES, CHIP 22 (1005)
R338	1-208-911-81 s	RES, CHIP 10K (1005)
R339	1-208-911-81 s	RES, CHIP 10K (1005)
R340	1-220-878-81 s	RES, CHIP 22 (1005)
R341	1-220-878-81 s	RES, CHIP 22 (1005)
R343	1-220-878-81 s	RES, CHIP 22 (1005)
R346	1-208-935-81 s	RES, CHIP 100K (1005)
R347	1-220-870-81 s	RES, CHIP 10 (1005)
R348	1-208-935-81 s	RES, CHIP 100K (1005)
R349	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R350	1-220-870-81 s	RES, CHIP 10 (1005)
R351	1-220-870-81 s	RES, CHIP 10 (1005)
R352	1-220-870-81 s	RES, CHIP 10 (1005)
R353	1-220-870-81 s	RES, CHIP 10 (1005)
R354	1-220-870-81 s	RES, CHIP 10 (1005)
R355	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R356	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R357	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R358	1-220-870-81 s	RES, CHIP 10 (1005)
R359	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R360	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R361	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R362	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R363	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R364	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R402	1-208-911-81 s	RES, CHIP 10K (1005)
R403	1-208-911-81 s	RES, CHIP 10K (1005)
R404	1-208-935-81 s	RES, CHIP 100K (1005)
R405	1-208-911-81 s	RES, CHIP 10K (1005)
R406	1-208-947-81 s	RES, CHIP 330K (1005)
R407	1-208-935-81 s	RES, CHIP 100K (1005)
R408	1-208-911-81 s	RES, CHIP 10K (1005)
R409	1-208-935-81 s	RES, CHIP 100K (1005)
R500	1-208-903-81 s	RES, CHIP 4.7K (1005)
R501	1-208-911-81 s	RES, CHIP 10K (1005)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R502	1-208-911-81	s RES, CHIP 10K (1005)
R503	1-208-911-81	s RES, CHIP 10K (1005)
R504	1-218-990-81	s CONDUCTOR, CHIP (1005)
R505	1-208-887-81	s RES, CHIP 1.0K (1005)
R506	1-208-887-81	s RES, CHIP 1.0K (1005)
R507	1-218-990-81	s CONDUCTOR, CHIP (1005)
R508	1-218-990-81	s CONDUCTOR, CHIP (1005)
R509	1-220-878-81	s RES, CHIP 22 (1005)
R510	1-220-878-81	s RES, CHIP 22 (1005)
R511	1-208-903-81	s RES, CHIP 4.7K (1005)
R512	1-218-990-81	s CONDUCTOR, CHIP (1005)
R513	1-220-878-81	s RES, CHIP 22 (1005)
R514	1-218-990-81	s CONDUCTOR, CHIP (1005)
R515	1-208-903-81	s RES, CHIP 4.7K (1005)
R516	1-208-903-81	s RES, CHIP 4.7K (1005)
R517	1-208-903-81	s RES, CHIP 4.7K (1005)
R518	1-218-990-81	s CONDUCTOR, CHIP (1005)
R519	1-220-878-81	s RES, CHIP 22 (1005)
R521	1-218-990-81	s CONDUCTOR, CHIP (1005)
R522	1-218-990-81	s CONDUCTOR, CHIP (1005)
R523	1-218-990-81	s CONDUCTOR, CHIP (1005)
R524	1-218-990-81	s CONDUCTOR, CHIP (1005)
R525	1-218-990-81	s CONDUCTOR, CHIP (1005)
R528	1-220-870-81	s RES, CHIP 10 (1005)
R530	1-208-911-81	s RES, CHIP 10K (1005)
R531	1-208-911-81	s RES, CHIP 10K (1005)
R532	1-208-911-81	s RES, CHIP 10K (1005)
R534	1-218-990-81	s CONDUCTOR, CHIP (1005)
R536	1-208-911-81	s RES, CHIP 10K (1005)
R537	1-218-990-81	s CONDUCTOR, CHIP (1005)
R538	1-218-990-81	s CONDUCTOR, CHIP (1005)
R539	1-218-990-81	s CONDUCTOR, CHIP (1005)
R543	1-208-911-81	s RES, CHIP 10K (1005)
R545	1-208-855-81	s RES, CHIP 47 (1005)
R546	1-220-878-81	s RES, CHIP 22 (1005)
R547	1-220-878-81	s RES, CHIP 22 (1005)
R550	1-220-878-81	s RES, CHIP 22 (1005)
R600	1-220-878-81	s RES, CHIP 22 (1005)
R601	1-218-990-81	s CONDUCTOR, CHIP (1005)
R603	1-208-911-81	s RES, CHIP 10K (1005)
R604	1-208-911-81	s RES, CHIP 10K (1005)
R606	1-218-990-81	s CONDUCTOR, CHIP (1005)
R611	1-208-887-81	s RES, CHIP 1.0K (1005)
R613	1-208-911-81	s RES, CHIP 10K (1005)
R614	1-208-911-81	s RES, CHIP 10K (1005)
R617	1-208-857-81	s RES, CHIP 56 (1005)
R618	1-208-857-81	s RES, CHIP 56 (1005)
R619	1-208-911-81	s RES, CHIP 10K (1005)
R620	1-208-857-81	s RES, CHIP 56 (1005)
R621	1-208-911-81	s RES, CHIP 10K (1005)
R622	1-208-857-81	s RES, CHIP 56 (1005)
R623	1-208-892-81	s RES, CHIP 1.6K (1005)
R624	1-208-903-81	s RES, CHIP 4.7K (1005)
R626	1-208-857-81	s RES, CHIP 56 (1005)
R627	1-208-857-81	s RES, CHIP 56 (1005)
R628	1-208-857-81	s RES, CHIP 56 (1005)
R629	1-208-911-81	s RES, CHIP 10K (1005)
R630	1-208-857-81	s RES, CHIP 56 (1005)
R631	1-208-911-81	s RES, CHIP 10K (1005)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R634	1-208-947-81	s RES, CHIP 330K (1005)
R702	1-208-863-81	s RES, CHIP 100 (1005)
R803	1-208-875-81	s RES, CHIP 330 (1005)
R804	1-208-857-81	s RES, CHIP 56 (1005)
R806	1-208-857-81	s RES, CHIP 56 (1005)
R807	1-218-990-81	s CONDUCTOR, CHIP (1005)
R813	1-218-990-81	s CONDUCTOR, CHIP (1005)
R814	1-208-911-81	s RES, CHIP 10K (1005)
R816	1-218-990-81	s CONDUCTOR, CHIP (1005)
R817	1-208-903-81	s RES, CHIP 4.7K (1005)
R851	1-208-935-81	s RES, CHIP 100K (1005)
R852	1-208-935-81	s RES, CHIP 100K (1005)
R853	1-208-935-81	s RES, CHIP 100K (1005)
R854	1-208-935-81	s RES, CHIP 100K (1005)
R855	1-208-935-81	s RES, CHIP 100K (1005)
R856	1-208-935-81	s RES, CHIP 100K (1005)
R857	1-208-911-81	s RES, CHIP 10K (1005)
R900	1-220-878-81	s RES, CHIP 22 (1005)
R901	1-220-878-81	s RES, CHIP 22 (1005)
R902	1-220-878-81	s RES, CHIP 22 (1005)
R905	1-208-863-81	s RES, CHIP 100 (1005)
R906	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1000	1-208-863-81	s RES, CHIP 100 (1005)
R1100	1-208-875-81	s RES, CHIP 330 (1005)
R1101	1-208-911-81	s RES, CHIP 10K (1005)
R1102	1-208-911-81	s RES, CHIP 10K (1005)
R1103	1-208-911-81	s RES, CHIP 10K (1005)
R1104	1-208-857-81	s RES, CHIP 56 (1005)
R1106	1-208-857-81	s RES, CHIP 56 (1005)
R1107	1-208-887-81	s RES, CHIP 1.0K (1005)
R1117	1-208-903-81	s RES, CHIP 4.7K (1005)
R1202	1-220-878-81	s RES, CHIP 22 (1005)
R1203	1-220-878-81	s RES, CHIP 22 (1005)
R1204	1-220-878-81	s RES, CHIP 22 (1005)
R1205	1-208-911-81	s RES, CHIP 10K (1005)
R1207	1-220-870-81	s RES, CHIP 10 (1005)
R1208	1-220-870-81	s RES, CHIP 10 (1005)
R1209	1-220-878-81	s RES, CHIP 22 (1005)
R1210	1-220-878-81	s RES, CHIP 22 (1005)
R1212	1-220-870-81	s RES, CHIP 10 (1005)
R1213	1-220-870-81	s RES, CHIP 10 (1005)
R1214	1-218-990-81	s CONDUCTOR, CHIP (1005)
R1215	1-208-903-81	s RES, CHIP 4.7K (1005)
R1216	1-220-878-81	s RES, CHIP 22 (1005)
R1217	1-220-878-81	s RES, CHIP 22 (1005)
R1218	1-220-878-81	s RES, CHIP 22 (1005)
R1219	1-208-911-81	s RES, CHIP 10K (1005)
R1220	1-208-911-81	s RES, CHIP 10K (1005)
R1221	1-208-911-81	s RES, CHIP 10K (1005)
R1222	1-208-911-81	s RES, CHIP 10K (1005)
R1223	1-208-911-81	s RES, CHIP 10K (1005)
R1224	1-208-911-81	s RES, CHIP 10K (1005)
R1225	1-208-911-81	s RES, CHIP 10K (1005)
R1226	1-208-911-81	s RES, CHIP 10K (1005)
R1227	1-208-911-81	s RES, CHIP 10K (1005)
R1228	1-208-911-81	s RES, CHIP 10K (1005)
R1229	1-208-911-81	s RES, CHIP 10K (1005)
R1230	1-208-911-81	s RES, CHIP 10K (1005)
R1231	1-208-855-81	s RES, CHIP 47 (1005)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1232	1-208-911-81 s	RES, CHIP 10K (1005)
R1233	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1234	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1235	1-220-870-81 s	RES, CHIP 10 (1005)
R1237	1-220-878-81 s	RES, CHIP 22 (1005)
R1238	1-220-878-81 s	RES, CHIP 22 (1005)
R1239	1-220-878-81 s	RES, CHIP 22 (1005)
R1241	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1242	1-220-878-81 s	RES, CHIP 22 (1005)
R1243	1-220-878-81 s	RES, CHIP 22 (1005)
R1245	1-208-911-81 s	RES, CHIP 10K (1005)
R1246	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1248	1-220-878-81 s	RES, CHIP 22 (1005)
R1249	1-208-911-81 s	RES, CHIP 10K (1005)
R1250	1-220-878-81 s	RES, CHIP 22 (1005)
R1251	1-208-911-81 s	RES, CHIP 10K (1005)
R1252	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1253	1-208-911-81 s	RES, CHIP 10K (1005)
R1254	1-208-911-81 s	RES, CHIP 10K (1005)
R1255	1-208-895-81 s	RES, CHIP 2.2K (1005)
R1300	1-208-911-81 s	RES, CHIP 10K (1005)
R1301	1-220-878-81 s	RES, CHIP 22 (1005)
R1303	1-208-911-81 s	RES, CHIP 10K (1005)
R1304	1-208-911-81 s	RES, CHIP 10K (1005)
R1305	1-208-911-81 s	RES, CHIP 10K (1005)
R1306	1-208-911-81 s	RES, CHIP 10K (1005)
R1307	1-208-911-81 s	RES, CHIP 10K (1005)
R1308	1-208-911-81 s	RES, CHIP 10K (1005)
R1309	1-208-879-81 s	RES, CHIP 470 (1005)
R1310	1-208-879-81 s	RES, CHIP 470 (1005)
R1311	1-208-879-81 s	RES, CHIP 470 (1005)
R1312	1-220-878-81 s	RES, CHIP 22 (1005)
R1313	1-208-879-81 s	RES, CHIP 470 (1005)
R1314	1-208-879-81 s	RES, CHIP 470 (1005)
R1315	1-208-879-81 s	RES, CHIP 470 (1005)
R1316	1-220-878-81 s	RES, CHIP 22 (1005)
R1317	1-220-878-81 s	RES, CHIP 22 (1005)
R1318	1-220-878-81 s	RES, CHIP 22 (1005)
R1319	1-220-878-81 s	RES, CHIP 22 (1005)
R1320	1-220-878-81 s	RES, CHIP 22 (1005)
R1321	1-220-878-81 s	RES, CHIP 22 (1005)
R1322	1-208-911-81 s	RES, CHIP 10K (1005)
R1323	1-208-911-81 s	RES, CHIP 10K (1005)
R1324	1-208-911-81 s	RES, CHIP 10K (1005)
R1325	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1326	1-208-903-81 s	RES, CHIP 4.7K (1005)
R1327	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1328	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1329	1-220-878-81 s	RES, CHIP 22 (1005)
R1330	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1331	1-220-878-81 s	RES, CHIP 22 (1005)
R1332	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1333	1-220-878-81 s	RES, CHIP 22 (1005)
R1334	1-208-887-81 s	RES, CHIP 1.0K (1005)
R1335	1-220-878-81 s	RES, CHIP 22 (1005)
R1336	1-208-911-81 s	RES, CHIP 10K (1005)
R1337	1-220-878-81 s	RES, CHIP 22 (1005)
R1338	1-220-878-81 s	RES, CHIP 22 (1005)
R1339	1-220-878-81 s	RES, CHIP 22 (1005)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP Description
R1340	1-220-878-81 s	RES, CHIP 22 (1005)
R1400	1-208-911-81 s	RES, CHIP 10K (1005)
R1401	1-208-911-81 s	RES, CHIP 10K (1005)
R1402	1-208-911-81 s	RES, CHIP 10K (1005)
R1403	1-220-878-81 s	RES, CHIP 22 (1005)
R1410	1-220-870-81 s	RES, CHIP 10 (1005)
R1411	1-208-911-81 s	RES, CHIP 10K (1005)
R1413	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1414	1-208-911-81 s	RES, CHIP 10K (1005)
R1416	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1417	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1418	1-208-911-81 s	RES, CHIP 10K (1005)
R1419	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1420	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1432	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1440	1-208-911-81 s	RES, CHIP 10K (1005)
R1441	1-220-878-81 s	RES, CHIP 22 (1005)
R1500	1-220-878-81 s	RES, CHIP 22 (1005)
R1501	1-220-878-81 s	RES, CHIP 22 (1005)
R1502	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1503	1-208-863-81 s	RES, CHIP 100 (1005)
R1504	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1507	1-208-911-81 s	RES, CHIP 10K (1005)
R1508	1-208-911-81 s	RES, CHIP 10K (1005)
R1509	1-208-892-81 s	RES, CHIP 1.6K (1005)
R1510	1-208-863-81 s	RES, CHIP 100 (1005)
R1511	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1512	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R1513	1-208-911-81 s	RES, CHIP 10K (1005)
R1519	1-208-911-81 s	RES, CHIP 10K (1005)
R1520	1-208-911-81 s	RES, CHIP 10K (1005)
R1522	1-208-911-81 s	RES, CHIP 10K (1005)
R1523	1-208-911-81 s	RES, CHIP 10K (1005)
R1525	1-208-911-81 s	RES, CHIP 10K (1005)
RB200	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB201	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB202	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB203	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB204	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB205	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB206	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB207	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB208	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB209	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB210	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB211	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB212	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB213	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB214	1-234-370-21 s	RES, NETWORK 22 (1005X4)
RB215	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB216	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB217	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB218	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB219	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB220	1-234-378-21 s	RES, NETWORK 10K (1005X4)
RB221	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB222	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB223	1-234-371-21 s	RES, NETWORK 47 (1005X4)
RB224	1-234-371-21 s	RES, NETWORK 47 (1005X4)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB225	1-234-371-21	s	RES, NETWORK 47 (1005X4)
RB226	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB227	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB228	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB229	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB300	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB301	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB302	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB303	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB305	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB306	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB307	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB308	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB309	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB310	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB311	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB312	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB500	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB501	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB502	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB533	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB534	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB535	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB536	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB537	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB538	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB539	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB544	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB545	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB546	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB547	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB548	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB549	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB550	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB600	1-234-375-21	s	RES, NETWORK 1K (1005X4)
RB1200	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1201	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1202	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1203	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1204	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1205	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1206	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1207	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1208	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1209	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1210	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1211	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1212	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1213	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1214	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1215	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1216	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1217	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1218	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1219	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1220	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1221	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1222	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1223	1-234-370-21	s	RES, NETWORK 22 (1005X4)

(SY-355 BOARD (suffix 12))

Ref. No. or Q'ty	Part No.	SP	Description
RB1224	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1225	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1226	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1227	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1228	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1229	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1230	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1231	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1232	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1233	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1235	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1236	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1237	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1238	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1239	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1240	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1241	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1304	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1308	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1309	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1310	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1311	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1312	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1313	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1314	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1315	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1316	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1317	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1318	1-234-378-21	s	RES, NETWORK 10K (1005X4)
RB1400	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1402	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1422	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1424	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1425	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1426	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1427	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1428	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1429	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1431	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1432	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1433	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1434	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1435	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1436	1-234-370-21	s	RES, NETWORK 22 (1005X4)
RB1437	1-234-370-21	s	RES, NETWORK 22 (1005X4)
S200	1-771-721-21	s	SWITCH, TACTILE
S300	1-692-271-41	s	SWITCH, SLIDE
S301	1-771-721-21	s	SWITCH, TACTILE
S1200	1-771-721-21	s	SWITCH, TACTILE
S1201	1-771-721-21	s	SWITCH, TACTILE
S1301	1-692-271-41	s	SWITCH, SLIDE
TP1	1-535-877-22	s	CHIP, CHECKER
X300	1-813-824-11	s	OSCILLATOR, CRYSTAL
X600	1-813-049-21	s	VIBRATOR, CRYSTAL (24.576 MHz)
X1500	1-813-345-21	s	VIBRATOR, CRYSTAL (30 MHz)

TG-260 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-1540-092-A	s MOUNTED CIRCUIT BOARD, TG-260
C1	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C2	1-165-871-21	s CAP, ELECT 22MF (4.0X5.5)
C3	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C4	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C5	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C6	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C7	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C8	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C9	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C10	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C12	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C13	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C14	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C15	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C16	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C17	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C18	1-100-421-21	s CAP, ELECT 220MF (6.3X5.9)
C20	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C22	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C23	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C24	1-100-165-21	s CAP, ELECT 47MF (8X7)
C25	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C26	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C27	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C28	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C29	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C32	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C33	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C34	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C35	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C38	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C39	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C41	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C42	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C43	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C44	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C45	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C46	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C47	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C48	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C49	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C50	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C51	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C52	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C53	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C54	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C55	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C56	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C57	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C58	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C59	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C61	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C62	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C63	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C64	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C66	1-164-156-91	s CAP, CHIP CERAMIC 0.1MF F 1608
C67	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C69	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C70	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C71	1-126-398-21	s CAP, CHIP ELECT 4.7MF (4X5.7)
C72	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C73	1-126-398-21	s CAP, CHIP ELECT 4.7MF (4X5.7)
C74	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C75	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C76	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C77	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C78	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C79	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C80	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C81	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C82	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C83	1-165-884-91	s CAP, CERAMIC 2.2MF (1608)
C84	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C85	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C86	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C87	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C88	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C90	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C91	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C92	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C93	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C94	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C95	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C96	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C97	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C98	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C99	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C100	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C104	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C105	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C108	1-100-816-21	s CAP, ELECT 33MF (5.6X6.5)
C109	1-112-298-91	o CAP, CERAMIC 1MF B (1608)
C110	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C116	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
CN2	1-817-194-21	s PIN, CONNECTOR (SMD) 13P
CN3	1-818-579-91	s CONNECTOR, BOARD TO BOARD (60P)
CN4	1-580-789-21	s PIN, CONNECTOR (SMD) 6P
CN5	1-770-627-21	s PIN, CONNECTOR 10P
D1	8-719-083-60	s DIODE UDZSNPTE-174.7B
D3	6-502-122-01	s DI MA3J1430GLS0
D4	6-502-122-01	s DI MA3J1430GLS0
D5	6-502-121-01	s DI MA3J142EGLS0
D6	6-502-121-01	s DI MA3J142EGLS0
D7	6-502-121-01	s DI MA3J142EGLS0
D8	8-719-083-60	s DIODE UDZSNPTE-174.7B

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D9	8-719-083-60	s DIODE UDZSNPTE-174.7B
D10	6-502-146-01	o DI MA2S7280G8S0
E1	1-535-877-22	s CHIP, CHECKER
FB1	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB2	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB3	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB4	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB5	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB6	1-414-864-21	s FERRITE, EMI (SMD) (1608)
FB7	1-469-094-21	s FERRITE, EMI (SMD) (1608)
IC1	6-704-976-01	s IC ADR381ARTZ-REEL7
IC2	8-759-327-01	s IC NJM062V(Te2)
IC4	8-759-327-01	s IC NJM062V(Te2)
IC5	6-711-375-01	s IC LT1964ES5-BYP#TR
IC7	6-711-852-01	s IC LTC1844ES5-BYP
IC9	6-709-765-01	s IC EPCS4SI8N(15)
IC10	6-704-099-01	s IC TC7WZ08FK(Te85R)
IC11	8-759-549-20	s IC SN74LV541APWR
IC12	6-709-646-01	s IC TLC2933AIPWR
IC13	6-704-099-01	s IC TC7WZ08FK(Te85R)
IC14	8-759-327-01	s IC NJM062V(Te2)
IC15	8-759-327-01	s IC NJM062V(Te2)
IC17	8-759-672-76	s IC AK9813BF-E2
IC18	8-759-327-01	s IC NJM062V(Te2)
IC19	8-759-338-95	s IC NJM2903V(Te2)
IC20	8-759-338-95	s IC NJM2903V(Te2)
IC21	8-759-338-95	s IC NJM2903V(Te2)
IC22	6-704-099-01	s IC TC7WZ08FK(Te85R)
IC23	8-759-564-49	s IC TC7W53FU(Te12R)
IC24	6-711-852-01	s IC LTC1844ES5-BYP
IC25	6-710-110-01	s IC CDCE906PWR
IC26	6-711-852-01	s IC LTC1844ES5-BYP
IC27	8-759-592-42	s IC TC7SZ00FU(Te85R)
IC28	6-711-852-01	s IC LTC1844ES5-BYP
IC29	6-711-852-01	s IC LTC1844ES5-BYP
IC30	6-706-478-01	s IC TC7SET08FU(T5RSQJF)
IC31	8-759-675-54	s IC TC7W53FK(Te85R)
L1	1-414-392-41	s INDUCTOR (SMD) 1.0UH
Q2	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q3	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q5	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q7	6-550-631-01	s TRANSISTOR 2SA1797-T100-Q
Q8	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q9	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q10	8-729-140-86	s TRANSISTOR 2SA1610-T1Y34
Q11	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q14	8-729-144-81	s TRANSISTOR 2SC4176T1B33B34B35
Q15	8-729-140-86	s TRANSISTOR 2SA1610-T1Y34
Q16	8-729-107-04	s TRANSISTOR 2SB1115-T1YL
Q17	8-729-809-73	s TRANSISTOR 2SK536-TB
Q18	6-551-659-01	s TRANSISTOR SI3443BDV-T1-E3
Q19	6-551-659-01	s TRANSISTOR SI3443BDV-T1-E3
Q20	8-729-928-05	s TRANSISTOR 2SC4617TL-QR
Q21	6-550-632-01	s TRANSISTOR 2SC4672-T100-Q
R1	1-208-899-81	s RES, CHIP 3.3K (1005)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R2	1-208-911-81	s RES, CHIP 10K (1005)
R3	1-208-911-81	s RES, CHIP 10K (1005)
R4	1-218-990-81	s CONDUCTOR, CHIP (1005)
R5	1-220-878-81	s RES, CHIP 22 (1005)
R6	1-208-863-81	s RES, CHIP 100 (1005)
R7	1-208-863-81	s RES, CHIP 100 (1005)
R8	1-208-863-81	s RES, CHIP 100 (1005)
R9	1-220-878-81	s RES, CHIP 22 (1005)
R10	1-218-990-81	s CONDUCTOR, CHIP (1005)
R11	1-218-990-81	s CONDUCTOR, CHIP (1005)
R12	1-218-990-81	s CONDUCTOR, CHIP (1005)
R13	1-218-990-81	s CONDUCTOR, CHIP (1005)
R14	1-218-990-81	s CONDUCTOR, CHIP (1005)
R15	1-218-990-81	s CONDUCTOR, CHIP (1005)
R16	1-208-919-81	s RES, CHIP 22K (1005)
R17	1-208-903-81	s RES, CHIP 4.7K (1005)
R18	1-208-919-81	s RES, CHIP 22K (1005)
R19	1-208-863-81	s RES, CHIP 100 (1005)
R20	1-208-915-81	s RES, CHIP 15K (1005)
R21	1-208-911-81	s RES, CHIP 10K (1005)
R22	1-208-883-81	s RES, CHIP 680 (1005)
R24	1-208-863-81	s RES, CHIP 100 (1005)
R25	1-208-863-81	s RES, CHIP 100 (1005)
R27	1-220-878-81	s RES, CHIP 22 (1005)
R28	1-208-879-81	s RES, CHIP 470 (1005)
R29	1-208-899-81	s RES, CHIP 3.3K (1005)
R30	1-208-927-81	s RES, CHIP 47K (1005)
R31	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-208-863-81	s RES, CHIP 100 (1005)
R33	1-216-864-91	s CONDUCTOR, CHIP (1608)
R35	1-208-915-81	s RES, CHIP 15K (1005)
R36	1-208-911-81	s RES, CHIP 10K (1005)
R37	1-218-990-81	s CONDUCTOR, CHIP (1005)
R38	1-208-927-81	s RES, CHIP 47K (1005)
R39	1-218-990-81	s CONDUCTOR, CHIP (1005)
R44	1-208-903-81	s RES, CHIP 4.7K (1005)
R45	1-208-919-81	s RES, CHIP 22K (1005)
R47	1-218-990-81	s CONDUCTOR, CHIP (1005)
R48	1-218-990-81	s CONDUCTOR, CHIP (1005)
R49	1-218-990-81	s CONDUCTOR, CHIP (1005)
R50	1-208-855-81	s RES, CHIP 47 (1005)
R51	1-208-855-81	s RES, CHIP 47 (1005)
R52	1-220-870-81	s RES, CHIP 10 (1005)
R53	1-208-855-81	s RES, CHIP 47 (1005)
R54	1-208-863-81	s RES, CHIP 100 (1005)
R55	1-208-855-81	s RES, CHIP 47 (1005)
R56	1-208-855-81	s RES, CHIP 47 (1005)
R57	1-208-863-81	s RES, CHIP 100 (1005)
R58	1-208-863-81	s RES, CHIP 100 (1005)
R59	1-208-863-81	s RES, CHIP 100 (1005)
R60	1-208-855-81	s RES, CHIP 47 (1005)
R61	1-218-990-81	s CONDUCTOR, CHIP (1005)
R62	1-218-990-81	s CONDUCTOR, CHIP (1005)
R63	1-218-990-81	s CONDUCTOR, CHIP (1005)
R64	1-208-911-81	s RES, CHIP 10K (1005)
R65	1-208-875-81	s RES, CHIP 330 (1005)
R66	1-218-990-81	s CONDUCTOR, CHIP (1005)
R67	1-208-879-81	s RES, CHIP 470 (1005)
R68	1-218-990-81	s CONDUCTOR, CHIP (1005)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R69	1-208-855-81	s RES, CHIP 47 (1005)
R70	1-208-911-81	s RES, CHIP 10K (1005)
R71	1-208-855-81	s RES, CHIP 47 (1005)
R72	1-208-911-81	s RES, CHIP 10K (1005)
R73	1-208-855-81	s RES, CHIP 47 (1005)
R74	1-208-855-81	s RES, CHIP 47 (1005)
R75	1-208-855-81	s RES, CHIP 47 (1005)
R76	1-208-855-81	s RES, CHIP 47 (1005)
R77	1-208-855-81	s RES, CHIP 47 (1005)
R78	1-208-863-81	s RES, CHIP 100 (1005)
R79	1-208-911-81	s RES, CHIP 10K (1005)
R80	1-208-899-81	s RES, CHIP 3.3K (1005)
R81	1-208-895-81	s RES, CHIP 2.2K (1005)
R82	1-208-903-81	s RES, CHIP 4.7K (1005)
R83	1-208-903-81	s RES, CHIP 4.7K (1005)
R84	1-208-919-81	s RES, CHIP 22K (1005)
R85	1-220-870-81	s RES, CHIP 10 (1005)
R88	1-208-907-81	s RES, CHIP 6.8K (1005)
R89	1-208-911-81	s RES, CHIP 10K (1005)
R90	1-208-907-81	s RES, CHIP 6.8K (1005)
R91	1-208-935-81	s RES, CHIP 100K (1005)
R92	1-208-895-81	s RES, CHIP 2.2K (1005)
R93	1-208-911-81	s RES, CHIP 10K (1005)
R94	1-208-895-81	s RES, CHIP 2.2K (1005)
R95	1-208-935-81	s RES, CHIP 100K (1005)
R96	1-220-878-81	s RES, CHIP 22 (1005)
R97	1-220-870-81	s RES, CHIP 10 (1005)
R98	1-220-874-81	s RES, CHIP 15 (1005)
R99	1-220-874-81	s RES, CHIP 15 (1005)
R100	1-208-863-81	s RES, CHIP 100 (1005)
R101	1-208-863-81	s RES, CHIP 100 (1005)
R103	1-208-887-81	s RES, CHIP 1.0K (1005)
R104	1-208-903-81	s RES, CHIP 4.7K (1005)
R105	1-208-903-81	s RES, CHIP 4.7K (1005)
R106	1-208-915-81	s RES, CHIP 15K (1005)
R107	1-208-919-81	s RES, CHIP 22K (1005)
R108	1-208-919-81	s RES, CHIP 22K (1005)
R109	1-208-903-81	s RES, CHIP 4.7K (1005)
R110	1-208-919-81	s RES, CHIP 22K (1005)
R111	1-208-911-81	s RES, CHIP 10K (1005)
R112	1-208-911-81	s RES, CHIP 10K (1005)
R113	1-208-899-81	s RES, CHIP 3.3K (1005)
R114	1-208-907-81	s RES, CHIP 6.8K (1005)
R115	1-208-911-81	s RES, CHIP 10K (1005)
R116	1-208-911-81	s RES, CHIP 10K (1005)
R117	1-208-919-81	s RES, CHIP 22K (1005)
R118	1-208-863-81	s RES, CHIP 100 (1005)
R123	1-208-899-81	s RES, CHIP 3.3K (1005)
R124	1-208-903-81	s RES, CHIP 4.7K (1005)
R125	1-208-903-81	s RES, CHIP 4.7K (1005)
R126	1-208-911-81	s RES, CHIP 10K (1005)
R127	1-208-899-81	s RES, CHIP 3.3K (1005)
R128	1-208-899-81	s RES, CHIP 3.3K (1005)
R129	1-208-903-81	s RES, CHIP 4.7K (1005)
R130	1-208-919-81	s RES, CHIP 22K (1005)
R131	1-208-899-81	s RES, CHIP 3.3K (1005)
R132	1-208-919-81	s RES, CHIP 22K (1005)
R133	1-208-915-81	s RES, CHIP 15K (1005)
R134	1-208-915-81	s RES, CHIP 15K (1005)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R135	1-208-915-81	s RES, CHIP 15K (1005)
R136	1-208-935-81	s RES, CHIP 100K (1005)
R137	1-208-935-81	s RES, CHIP 100K (1005)
R138	1-208-935-81	s RES, CHIP 100K (1005)
R139	1-208-935-81	s RES, CHIP 100K (1005)
R140	1-208-959-81	s RES, CHIP 1M (1005)
R141	1-208-959-81	s RES, CHIP 1M (1005)
R142	1-208-959-81	s RES, CHIP 1M (1005)
R143	1-208-935-81	s RES, CHIP 100K (1005)
R144	1-220-870-81	s RES, CHIP 10 (1005)
R145	1-220-870-81	s RES, CHIP 10 (1005)
R146	1-220-870-81	s RES, CHIP 10 (1005)
R147	1-220-870-81	s RES, CHIP 10 (1005)
R148	1-208-887-81	s RES, CHIP 1.0K (1005)
R149	1-208-919-81	s RES, CHIP 22K (1005)
R150	1-208-915-81	s RES, CHIP 15K (1005)
R151	1-208-911-81	s RES, CHIP 10K (1005)
R152	1-208-935-81	s RES, CHIP 100K (1005)
R153	1-220-878-81	s RES, CHIP 22 (1005)
R154	1-220-878-81	s RES, CHIP 22 (1005)
R155	1-220-870-81	s RES, CHIP 10 (1005)
R156	1-220-878-81	s RES, CHIP 22 (1005)
R157	1-220-878-81	s RES, CHIP 22 (1005)
R158	1-220-878-81	s RES, CHIP 22 (1005)
R159	1-218-990-81	s CONDUCTOR, CHIP (1005)
R160	1-220-878-81	s RES, CHIP 22 (1005)
R161	1-208-863-81	s RES, CHIP 100 (1005)
R162	1-208-863-81	s RES, CHIP 100 (1005)
R163	1-208-855-81	s RES, CHIP 47 (1005)
R164	1-208-855-81	s RES, CHIP 47 (1005)
R165	1-208-855-81	s RES, CHIP 47 (1005)
R166	1-208-855-81	s RES, CHIP 47 (1005)
R167	1-208-855-81	s RES, CHIP 47 (1005)
R168	1-208-863-81	s RES, CHIP 100 (1005)
R169	1-208-911-81	s RES, CHIP 10K (1005)
R170	1-208-891-81	s RES, CHIP 1.5K (1005)
R171	1-208-911-81	s RES, CHIP 10K (1005)
R172	1-218-990-81	s CONDUCTOR, CHIP (1005)
R173	1-208-899-81	s RES, CHIP 3.3K (1005)
R174	1-208-915-81	s RES, CHIP 15K (1005)
R175	1-208-911-81	s RES, CHIP 10K (1005)
R176	1-208-931-81	s RES, CHIP 68K (1005)
R177	1-208-927-81	s RES, CHIP 47K (1005)
R179	1-208-911-81	s RES, CHIP 10K (1005)
R180	1-208-911-81	s RES, CHIP 10K (1005)
R181	1-218-990-81	s CONDUCTOR, CHIP (1005)
R183	1-208-935-81	s RES, CHIP 100K (1005)
R184	1-208-887-81	s RES, CHIP 1.0K (1005)
R185	1-208-935-81	s RES, CHIP 100K (1005)
R189	1-220-878-81	s RES, CHIP 22 (1005)
R190	1-220-878-81	s RES, CHIP 22 (1005)
RB1	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB2	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB3	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB5	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB6	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB7	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB8	1-234-370-21	s RES, NETWORK 22 (1005X4)

(TG-260 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB9	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB10	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB11	1-234-378-21	s RES, NETWORK 10K (1005X4)
X1	1-795-670-12	s OSCILLATOR, CRYSTAL (VCXO) 3.3V
X2	1-795-671-12	s OSCILLATOR, CRYSTAL (VCXO) 3.3V

TG-274A BOARD

Ref. No. or Q'ty	Part No.	SP Description
C1	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C2	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C3	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C4	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C5	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C6	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C7	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C8	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C9	1-116-346-11	s CAP, ELECT 47MF 105
C11	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C12	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C13	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C14	1-112-915-11	s CAP, NIOBIUM ELECT 22MF 105
C15	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C17	1-112-915-11	s CAP, NIOBIUM ELECT 22MF 105
C18	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C19	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C20	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C21	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C22	1-116-346-11	s CAP, ELECT 47MF 105
C23	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
C24	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C25	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C26	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C27	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C29	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C30	1-116-117-11	s CAP, ELECT 22MF 105
C31	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C32	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C34	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C35	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C36	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C37	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C38	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C39	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C40	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C41	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C42	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C43	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C44	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C45	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C46	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C47	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C48	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C49	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C50	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C51	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C52	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C53	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C54	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C55	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C56	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C57	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C58	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C60	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C61	1-165-875-91	s CAP, CHIP CERAMIC 10MF B 3216
C62	1-116-108-11	s CAP, ELECT 330MF 105
C63	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C64	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C65	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C66	1-114-548-11	s CAP, NIOBIUM ELECT 22UF
C67	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C101	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C102	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C103	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C104	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C105	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C106	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C107	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C109	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C110	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C111	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C112	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C113	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C114	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C115	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C116	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C117	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C118	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C119	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C120	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C121	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C122	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C123	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C124	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C125	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C126	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C127	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C128	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C129	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C130	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C204	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C205	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C206	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C208	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C210	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C212	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C213	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C214	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C215	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C216	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C217	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C218	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C219	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C220	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C221	1-114-965-11	s CAP, CERAMIC 4.7MF X7R (3225)
C222	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C223	1-114-965-11	s CAP, CERAMIC 4.7MF X7R (3225)
C224	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C225	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C226	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C227	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C228	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C229	1-135-960-91	s CAP, CHIP CERAMIC 10MF B(3225)
C230	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C231	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C232	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C233	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C234	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C235	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C236	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C237	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C238	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C239	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C240	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C241	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C242	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C243	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C244	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C245	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C246	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C247	1-115-339-91	s CAP, CERAMIC 0.1MF B (2012)
C248	1-112-300-91	s CAP, CERAMIC 4.7MF B (2012)
C249	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C250	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C251	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C252	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C253	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C254	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C255	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C256	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C301	1-165-989-91	s CAP, CERAMIC 10MF (2012)
C302	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C303	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C304	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C305	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C306	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C307	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C308	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C309	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C310	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C311	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C312	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C313	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C314	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C315	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C316	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C317	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C318	1-114-582-91	o CAP, CERAMIC 0.1MF B 1005
C319	1-114-549-11	s CAP, NIOBIUM ELECT 47UF
CN2	1-817-194-21	s PIN, CONNECTOR (SMD) 13P
CN3	1-580-789-21	s PIN, CONNECTOR (SMD) 6P
CN5	1-770-627-21	s PIN, CONNECTOR 10P
CN11	1-822-981-21	s CONNECTOR, COAXIAL (RECEPTACLE)
CN12	1-822-981-21	s CONNECTOR, COAXIAL (RECEPTACLE)
CN13	1-822-981-21	s CONNECTOR, COAXIAL (RECEPTACLE)
D1	8-719-083-60	s DI UDZSUSTE-174.7B
D2	8-719-083-60	s DI UDZSUSTE-174.7B
D3	8-719-083-60	s DI UDZSUSTE-174.7B
D201	6-502-146-01	o DI MA2S7280G8S0
D202	8-719-989-04	s DIODE DAN222-TL
D203	8-719-989-04	s DIODE DAN222-TL
D204	8-719-989-04	s DIODE DAN222-TL
D205	8-719-989-04	s DIODE DAN222-TL
D206	8-719-989-04	s DIODE DAN222-TL

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D207	8-719-989-04	s	DIODE DAN222-TL
D208	8-719-989-04	s	DIODE DAN222-TL
D209	8-719-989-04	s	DIODE DAN222-TL
D210	8-719-989-04	s	DIODE DAN222-TL
D211	8-719-989-04	s	DIODE DAN222-TL
D212	8-719-989-04	s	DIODE DAN222-TL
D213	8-719-989-04	s	DIODE DAN222-TL
D214	8-719-989-04	s	DIODE DAN222-TL
E1	1-535-877-22	s	CHIP, CHECKER
E2	1-535-877-22	s	CHIP, CHECKER
FB1	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB2	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB3	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB4	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB5	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB6	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB7	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB8	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB9	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB10	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB11	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB12	1-414-864-21	s	FERRITE, EMI (SMD) (1608)
FB16	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB21	1-469-094-21	s	FERRITE, EMI (SMD) (1608)
FB22	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB24	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB201	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB202	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB203	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB301	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB302	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB303	1-400-334-21	s	FERRITE, EMI (SMD) (1608)
FB304	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB305	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB306	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB307	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
FB308	1-469-122-21	s	FERRITE, EMI (SMD) (1608)
IC1	6-704-976-01	s	IC ADR381ARTZ-REEL7
IC2	8-759-327-01	s	IC NJM062V (TE2)
IC3	6-711-852-01	s	IC LTC1844ES5-BYP
IC4	6-711-852-01	s	IC LTC1844ES5-BYP
IC5	8-759-327-01	s	IC NJM062V (TE2)
IC6	6-708-464-01	o	IC R1114Q251D-TR-FA
IC7	6-711-375-01	s	IC LT1964ES5-BYP#TR
IC10	6-706-478-01	s	IC TC7SET08FU
IC11	6-709-646-01	s	IC TLC2933AIPWR
IC12	6-704-099-01	s	IC TC7WZ08FK
IC13	8-759-327-01	s	IC NJM062V (TE2)
IC15	8-759-675-54	s	IC TC7W53FK (TE85R)
IC16	8-759-338-95	s	IC NJM2903V (TE2)
IC17	8-759-338-95	s	IC NJM2903V (TE2)
IC18	8-759-338-95	s	IC NJM2903V (TE2)
IC19	6-711-375-01	s	IC LT1964ES5-BYP#TR
IC21	6-710-110-01	s	IC CDCE906PWR
IC24	6-704-350-01	s	IC SN74LVC1G66DCKR
IC25	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC26	6-711-852-01	s	IC LTC1844ES5-BYP

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC101	8-759-592-42	s	IC TC7SZ00FU (TE85R)
IC102	6-711-852-01	s	IC LTC1844ES5-BYP
IC103	6-706-841-01	s	IC EP1C6F256C6N (300)
IC104	6-713-829-01	s	IC EPCS4SI8N (11)
IC202	6-703-181-01	s	IC TC74VCX74FT (EL)
IC203	6-702-319-01	s	IC TC7WZ04FK
IC204	6-703-181-01	s	IC TC74VCX74FT (EL)
IC205	6-700-225-01	s	IC TC74VCX157FT (EL)
IC206	6-704-099-01	s	IC TC7WZ08FK
IC207	8-759-549-20	s	IC SN74LV541APWR
IC208	6-708-326-01	s	IC TC74HCT4053AFT (EL)
IC209	8-759-327-01	s	IC NJM062V (TE2)
IC210	8-759-672-76	s	IC AK9813BF-E2
IC211	8-759-573-97	s	IC SN74LVC541APWR
IC212	8-759-573-97	s	IC SN74LVC541APWR
IC213	8-759-327-01	s	IC NJM062V (TE2)
IC301	6-700-225-01	s	IC TC74VCX157FT (EL)
IC302	6-700-225-01	s	IC TC74VCX157FT (EL)
IC303	6-700-225-01	s	IC TC74VCX157FT (EL)
IC304	6-700-225-01	s	IC TC74VCX157FT (EL)
IC305	6-700-225-01	s	IC TC74VCX157FT (EL)
IC306	6-700-225-01	s	IC TC74VCX157FT (EL)
IC307	6-700-225-01	s	IC TC74VCX157FT (EL)
IC308	6-700-225-01	s	IC TC74VCX157FT (EL)
IC309	8-759-672-76	s	IC AK9813BF-E2
L1	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L2	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L3	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
L4	1-414-392-41	s	INDUCTOR (SMD) 1.0UH
Q1	6-550-632-01	s	TRANSISTOR 2SC4672-T100-Q
Q2	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q3	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q4	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q5	6-550-631-01	s	TRANSISTOR 2SA1797-T100-Q
Q6	6-552-659-01	s	TR SI3443CDV-T1-GE3
Q7	6-552-659-01	s	TR SI3443CDV-T1-GE3
Q8	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q201	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q202	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q203	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q204	8-729-107-04	s	TRANSISTOR 2SB1115-T1YL
Q205	8-729-809-73	s	TRANSISTOR 2SK536-TB
Q206	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q207	8-729-927-99	s	TRANSISTOR 2SC4617TL-QR
Q208	8-729-928-19	s	TRANSISTOR 2SA1774TL-QR
Q209	8-729-053-11	s	TRANSISTOR FDC6561AN
Q210	8-729-053-12	s	TRANSISTOR FDC6506P
Q211	8-729-053-11	s	TRANSISTOR FDC6561AN
Q212	8-729-053-12	s	TRANSISTOR FDC6506P
Q213	8-729-053-11	s	TRANSISTOR FDC6561AN
Q214	8-729-053-12	s	TRANSISTOR FDC6506P
Q215	8-729-053-11	s	TRANSISTOR FDC6561AN
Q216	8-729-053-12	s	TRANSISTOR FDC6506P
Q217	8-729-053-11	s	TRANSISTOR FDC6561AN
Q218	8-729-053-12	s	TRANSISTOR FDC6506P
R1	1-220-878-81	s	RES, CHIP 22 (1005)

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R2	1-208-855-81	s RES, CHIP 47 (1005)
R3	1-208-927-81	s RES, CHIP 47K (1005)
R4	1-208-927-81	s RES, CHIP 47K (1005)
R5	1-208-911-81	s RES, CHIP 10K (1005)
R7	1-208-855-81	s RES, CHIP 47 (1005)
R8	1-208-855-81	s RES, CHIP 47 (1005)
R9	1-220-878-81	s RES, CHIP 22 (1005)
R10	1-220-878-81	s RES, CHIP 22 (1005)
R11	1-220-878-81	s RES, CHIP 22 (1005)
R12	1-208-895-81	s RES, CHIP 2.2K (1005)
R13	1-208-911-81	s RES, CHIP 10K (1005)
R14	1-208-911-81	s RES, CHIP 10K (1005)
R15	1-208-715-11	s RES, CHIP 22K (1005)
R16	1-218-990-81	s CONDUCTOR, CHIP (1005)
R17	1-208-915-81	s RES, CHIP 15K (1005)
R18	1-208-863-81	s RES, CHIP 100 (1005)
R19	1-208-887-81	s RES, CHIP 1.0K (1005)
R20	1-208-935-81	s RES, CHIP 100K (1005)
R21	1-208-863-81	s RES, CHIP 100 (1005)
R22	1-208-863-81	s RES, CHIP 100 (1005)
R23	1-208-915-81	s RES, CHIP 15K (1005)
R24	1-208-715-11	s RES, CHIP 22K (1005)
R25	1-208-903-81	s RES, CHIP 4.7K (1005)
R26	1-220-870-81	s RES, CHIP 10 (1005)
R27	1-208-715-11	s RES, CHIP 22K (1005)
R31	1-208-911-81	s RES, CHIP 10K (1005)
R32	1-208-899-81	s RES, CHIP 3.3K (1005)
R33	1-208-931-81	s RES, CHIP 68K (1005)
R34	1-208-915-81	s RES, CHIP 15K (1005)
R35	1-208-863-81	s RES, CHIP 100 (1005)
R36	1-208-911-81	s RES, CHIP 10K (1005)
R37	1-208-883-81	s RES, CHIP 680 (1005)
R38	1-208-855-81	s RES, CHIP 47 (1005)
R39	1-208-879-81	s RES, CHIP 470 (1005)
R40	1-208-899-81	s RES, CHIP 3.3K (1005)
R41	1-208-927-81	s RES, CHIP 47K (1005)
R42	1-208-911-81	s RES, CHIP 10K (1005)
R43	1-208-855-81	s RES, CHIP 47 (1005)
R44	1-208-855-81	s RES, CHIP 47 (1005)
R45	1-208-863-81	s RES, CHIP 100 (1005)
R46	1-208-915-81	s RES, CHIP 15K (1005)
R47	1-208-911-81	s RES, CHIP 10K (1005)
R48	1-208-715-11	s RES, CHIP 22K (1005)
R49	1-208-927-81	s RES, CHIP 47K (1005)
R50	1-208-863-81	s RES, CHIP 100 (1005)
R53	1-208-863-81	s RES, CHIP 100 (1005)
R56	1-208-935-81	s RES, CHIP 100K (1005)
R57	1-208-887-81	s RES, CHIP 1.0K (1005)
R58	1-208-903-81	s RES, CHIP 4.7K (1005)
R59	1-220-870-81	s RES, CHIP 10 (1005)
R60	1-220-870-81	s RES, CHIP 10 (1005)
R61	1-208-715-11	s RES, CHIP 22K (1005)
R62	1-208-715-11	s RES, CHIP 22K (1005)
R63	1-208-903-81	s RES, CHIP 4.7K (1005)
R64	1-208-911-81	s RES, CHIP 10K (1005)
R65	1-208-911-81	s RES, CHIP 10K (1005)
R66	1-208-911-81	s RES, CHIP 10K (1005)
R67	1-208-911-81	s RES, CHIP 10K (1005)
R68	1-208-715-11	s RES, CHIP 22K (1005)

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R69	1-208-863-81	s RES, CHIP 100 (1005)
R70	1-218-989-11	s RES, CHIP 1M (1005)
R71	1-218-989-11	s RES, CHIP 1M (1005)
R72	1-220-870-81	s RES, CHIP 10 (1005)
R73	1-220-870-81	s RES, CHIP 10 (1005)
R74	1-208-935-81	s RES, CHIP 100K (1005)
R75	1-208-935-81	s RES, CHIP 100K (1005)
R76	1-208-887-81	s RES, CHIP 1.0K (1005)
R77	1-208-715-11	s RES, CHIP 22K (1005)
R78	1-208-915-81	s RES, CHIP 15K (1005)
R79	1-208-911-81	s RES, CHIP 10K (1005)
R81	1-208-935-81	s RES, CHIP 100K (1005)
R82	1-220-878-81	s RES, CHIP 22 (1005)
R83	1-220-878-81	s RES, CHIP 22 (1005)
R84	1-220-870-81	s RES, CHIP 10 (1005)
R85	1-220-870-81	s RES, CHIP 10 (1005)
R87	1-220-878-81	s RES, CHIP 22 (1005)
R88	1-208-935-81	s RES, CHIP 100K (1005)
R89	1-220-870-81	s RES, CHIP 10 (1005)
R90	1-208-935-81	s RES, CHIP 100K (1005)
R91	1-208-935-81	s RES, CHIP 100K (1005)
R92	1-208-935-81	s RES, CHIP 100K (1005)
R98	1-208-935-81	s RES, CHIP 100K (1005)
R99	1-220-870-81	s RES, CHIP 10 (1005)
R101	1-208-863-81	s RES, CHIP 100 (1005)
R103	1-208-671-11	s RES, CHIP 330 (1005)
R104	1-208-903-81	s RES, CHIP 4.7K (1005)
R105	1-208-715-11	s RES, CHIP 22K (1005)
R106	1-218-990-81	s CONDUCTOR, CHIP (1005)
R108	1-218-990-81	s CONDUCTOR, CHIP (1005)
R109	1-218-990-81	s CONDUCTOR, CHIP (1005)
R110	1-208-855-81	s RES, CHIP 47 (1005)
R111	1-208-855-81	s RES, CHIP 47 (1005)
R112	1-220-870-81	s RES, CHIP 10 (1005)
R113	1-208-855-81	s RES, CHIP 47 (1005)
R114	1-208-863-81	s RES, CHIP 100 (1005)
R115	1-208-863-81	s RES, CHIP 100 (1005)
R116	1-208-855-81	s RES, CHIP 47 (1005)
R117	1-208-855-81	s RES, CHIP 47 (1005)
R118	1-208-855-81	s RES, CHIP 47 (1005)
R119	1-208-879-81	s RES, CHIP 470 (1005)
R120	1-208-855-81	s RES, CHIP 47 (1005)
R121	1-208-855-81	s RES, CHIP 47 (1005)
R122	1-220-878-81	s RES, CHIP 22 (1005)
R123	1-208-855-81	s RES, CHIP 47 (1005)
R124	1-208-855-81	s RES, CHIP 47 (1005)
R125	1-208-855-81	s RES, CHIP 47 (1005)
R126	1-208-855-81	s RES, CHIP 47 (1005)
R127	1-208-855-81	s RES, CHIP 47 (1005)
R128	1-208-911-81	s RES, CHIP 10K (1005)
R129	1-208-863-81	s RES, CHIP 100 (1005)
R130	1-208-911-81	s RES, CHIP 10K (1005)
R131	1-208-855-81	s RES, CHIP 47 (1005)
R132	1-208-855-81	s RES, CHIP 47 (1005)
R133	1-208-863-81	s RES, CHIP 100 (1005)
R134	1-208-863-81	s RES, CHIP 100 (1005)
R135	1-208-863-81	s RES, CHIP 100 (1005)
R136	1-208-863-81	s RES, CHIP 100 (1005)
R137	1-208-911-81	s RES, CHIP 10K (1005)

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R141	1-208-911-81	s RES, CHIP 10K (1005)
R144	1-208-911-81	s RES, CHIP 10K (1005)
R145	1-208-911-81	s RES, CHIP 10K (1005)
R204	1-220-870-81	s RES, CHIP 10 (1005)
R205	1-208-863-81	s RES, CHIP 100 (1005)
R206	1-208-863-81	s RES, CHIP 100 (1005)
R207	1-208-863-81	s RES, CHIP 100 (1005)
R208	1-208-863-81	s RES, CHIP 100 (1005)
R209	1-208-903-81	s RES, CHIP 4.7K (1005)
R210	1-208-715-11	s RES, CHIP 22K (1005)
R211	1-208-907-81	s RES, CHIP 6.8K (1005)
R212	1-208-911-81	s RES, CHIP 10K (1005)
R213	1-208-907-81	s RES, CHIP 6.8K (1005)
R214	1-208-935-81	s RES, CHIP 100K (1005)
R215	1-208-895-81	s RES, CHIP 2.2K (1005)
R220	1-208-911-81	s RES, CHIP 10K (1005)
R221	1-208-895-81	s RES, CHIP 2.2K (1005)
R222	1-208-935-81	s RES, CHIP 100K (1005)
R223	1-220-878-81	s RES, CHIP 22 (1005)
R232	1-220-870-81	s RES, CHIP 10 (1005)
R233	1-220-874-81	s RES, CHIP 15 (1005)
R234	1-220-874-81	s RES, CHIP 15 (1005)
R235	1-208-859-81	s RES, CHIP 68 (1005)
R236	1-208-859-81	s RES, CHIP 68 (1005)
R237	1-208-859-81	s RES, CHIP 68 (1005)
R238	1-220-878-81	s RES, CHIP 22 (1005)
R239	1-220-878-81	s RES, CHIP 22 (1005)
R240	1-220-878-81	s RES, CHIP 22 (1005)
R241	1-220-878-81	s RES, CHIP 22 (1005)
R242	1-220-878-81	s RES, CHIP 22 (1005)
R243	1-220-878-81	s RES, CHIP 22 (1005)
R244	1-220-878-81	s RES, CHIP 22 (1005)
R245	1-220-878-81	s RES, CHIP 22 (1005)
R246	1-208-715-11	s RES, CHIP 22K (1005)
R247	1-208-715-11	s RES, CHIP 22K (1005)
R248	1-208-903-81	s RES, CHIP 4.7K (1005)
R249	1-211-969-91	s RES, CHIP 10 (1608)
R250	1-211-969-91	s RES, CHIP 10 (1608)
R251	1-211-977-91	s RES, CHIP 22 (1608)
R252	1-211-969-91	s RES, CHIP 10 (1608)
R253	1-208-903-81	s RES, CHIP 4.7K (1005)
R254	1-208-915-81	s RES, CHIP 15K (1005)
R255	1-208-715-11	s RES, CHIP 22K (1005)
R256	1-208-899-81	s RES, CHIP 3.3K (1005)
R257	1-208-907-81	s RES, CHIP 6.8K (1005)
R258	1-208-899-81	s RES, CHIP 3.3K (1005)
R259	1-208-903-81	s RES, CHIP 4.7K (1005)
R260	1-208-903-81	s RES, CHIP 4.7K (1005)
R261	1-208-911-81	s RES, CHIP 10K (1005)
R262	1-208-899-81	s RES, CHIP 3.3K (1005)
R263	1-208-899-81	s RES, CHIP 3.3K (1005)
R264	1-208-903-81	s RES, CHIP 4.7K (1005)
R265	1-208-899-81	s RES, CHIP 3.3K (1005)
R266	1-208-915-81	s RES, CHIP 15K (1005)
R267	1-208-915-81	s RES, CHIP 15K (1005)
R268	1-208-915-81	s RES, CHIP 15K (1005)
R269	1-208-935-81	s RES, CHIP 100K (1005)
R270	1-208-935-81	s RES, CHIP 100K (1005)
R271	1-208-935-81	s RES, CHIP 100K (1005)

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R272	1-218-989-11	s RES, CHIP 1M (1005)
R273	1-218-989-11	s RES, CHIP 1M (1005)
R274	1-218-989-11	s RES, CHIP 1M (1005)
R276	1-218-990-81	s CONDUCTOR, CHIP (1005)
R301	1-218-990-81	s CONDUCTOR, CHIP (1005)
R302	1-208-855-81	s RES, CHIP 47 (1005)
R303	1-208-855-81	s RES, CHIP 47 (1005)
R304	1-220-878-81	s RES, CHIP 22 (1005)
R305	1-208-859-81	s RES, CHIP 68 (1005)
R306	1-208-855-81	s RES, CHIP 47 (1005)
R307	1-208-855-81	s RES, CHIP 47 (1005)
R308	1-220-878-81	s RES, CHIP 22 (1005)
R309	1-208-859-81	s RES, CHIP 68 (1005)
R310	1-208-855-81	s RES, CHIP 47 (1005)
R311	1-208-855-81	s RES, CHIP 47 (1005)
R312	1-220-878-81	s RES, CHIP 22 (1005)
R313	1-208-859-81	s RES, CHIP 68 (1005)
R315	1-208-855-81	s RES, CHIP 47 (1005)
R317	1-220-882-81	s RES, CHIP 33 (1005)
R318	1-220-882-81	s RES, CHIP 33 (1005)
R319	1-220-882-81	s RES, CHIP 33 (1005)
R320	1-220-878-81	s RES, CHIP 22 (1005)
R321	1-220-878-81	s RES, CHIP 22 (1005)
R322	1-220-878-81	s RES, CHIP 22 (1005)
R323	1-220-878-81	s RES, CHIP 22 (1005)
R324	1-218-990-81	s CONDUCTOR, CHIP (1005)
R327	1-218-990-81	s CONDUCTOR, CHIP (1005)
R328	1-208-855-81	s RES, CHIP 47 (1005)
R330	1-220-882-81	s RES, CHIP 33 (1005)
R331	1-220-882-81	s RES, CHIP 33 (1005)
R332	1-220-882-81	s RES, CHIP 33 (1005)
R333	1-220-878-81	s RES, CHIP 22 (1005)
R334	1-220-878-81	s RES, CHIP 22 (1005)
R335	1-220-878-81	s RES, CHIP 22 (1005)
R336	1-220-878-81	s RES, CHIP 22 (1005)
R337	1-220-878-81	s RES, CHIP 22 (1005)
R338	1-220-878-81	s RES, CHIP 22 (1005)
R339	1-220-878-81	s RES, CHIP 22 (1005)
R340	1-220-878-81	s RES, CHIP 22 (1005)
R341	1-208-855-81	s RES, CHIP 47 (1005)
R342	1-208-855-81	s RES, CHIP 47 (1005)
R343	1-208-855-81	s RES, CHIP 47 (1005)
R344	1-208-855-81	s RES, CHIP 47 (1005)
R345	1-208-855-81	s RES, CHIP 47 (1005)
R346	1-208-855-81	s RES, CHIP 47 (1005)
R347	1-208-855-81	s RES, CHIP 47 (1005)
R348	1-208-855-81	s RES, CHIP 47 (1005)
R349	1-208-855-81	s RES, CHIP 47 (1005)
R350	1-208-855-81	s RES, CHIP 47 (1005)
R351	1-208-855-81	s RES, CHIP 47 (1005)
R352	1-218-990-81	s CONDUCTOR, CHIP (1005)
RB10	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB11	1-234-378-21	s RES, NETWORK 10K (1005X4)
RB203	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB204	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB205	1-234-381-21	s RES, NETWORK 100K (1005X4)
RB206	1-234-381-21	s RES, NETWORK 100K (1005X4)

(TG-274A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
X1	1-795-670-12	s OSCILLATOR, CRYSTAL (VCXO)3.3V
X2	1-795-671-12	s OSCILLATOR, CRYSTAL (VCXO)3.3V

1-4. Supplied Accessories List

SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-6772-374-C	s BELT ASSY, SHOULDER
1pc	1-835-427-12	s CORD, WITH XLR CONNECTOR
1pc	3-274-369-03	s SPACER, MICROPHONE
1pc	Δ 3-297-516-07	s MANUAL (JP), OPERATION (SY model only)
1pc	Δ 3-297-517-07	s MANUAL (GB), OPERATION
1pc	Δ 3-297-518-06	s CD-ROM (700)
1pc	4-124-122-02	s LABEL, (C), FORMAT
1pc	4-268-461-02	s CD-ROM (UTILITY SOFTWARE)

1-5. Optional Fixtures

Part No.	SP Description
----------	----------------

J-6026-110-A	o BURST CHART
J-6026-130-B	o GRAY SCALE CHART
J-6029-140-B	o PATTERN BOX
J-6252-510-A	o TORQUE DRIVER 6KG-CM
J-6252-520-A	o TORQUE DRIVER 12KG-CM
J-6323-430-A	o TORQUE SCREWDRIVER&Efs BIT (M3)
J-6323-530-A	o STOP WASHER FASTENING TOOL
J-6325-110-A	o BIT FOR TORQUE DRIVER (M1.4)
J-6325-380-A	o BIT FOR TORQUE DRIVER (M2)
J-6325-400-A	o TORQUE DRIVER (3KG)
J-6394-080-A	o GRAY SCALE CHART (16:9)
J-6570-130-A	s ALIGNMENT DISK (PFD23A-RS)
3-184-527-01	s CLOTH, CLEANING (150MMX150MM)
3-703-358-08	s PIN, PARALLEL (2X20) (STEEL)
7-432-114-11	s THREE BOND-1401B
7-600-000-48	s SONY BOND (SC608LVZ2) 180ML
9-919-573-01	s HEAD CLEANING LIQUID

1-6. CBK-HD01

RX-105 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C100	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C101	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C102	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C103	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C104	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C105	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C106	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C107	1-100-567-81	s CAP,CHIP CERAMIC 0.01MF B 1005
C108	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C111	1-164-858-81	s CAP, CHIP CERAMIC 22PF CH 1005
C112	1-107-819-81	s CAP,CHIP CERAMIC 22000PF B1005
C114	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C117	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C118	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-112-717-91	s CAP, CERAMIC 1UF B (1005)
C122	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C125	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C126	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C129	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C130	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C132	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C200	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C201	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
C202	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C203	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C204	1-164-874-81	s CAP,CHIP CERAMIC 100PF CH 1005
C205	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C206	1-100-159-91	s CAP, CERAMIC 22MF B (SMD) 3216
C207	1-125-777-81	s CAP, CHIP CERAMIC 0.1MF B 1005
C208	1-112-692-81	s CAP,CHIP CERAMIC1000PF CH 1005
CN100	1-764-243-31	o CONNECTOR (COAXIAL)
E100	1-535-757-21	s CHIP, CHECKER
FB100	1-469-670-21	s FERRITE, EMI (SMD) (2012)
IC100	6-712-298-01	s IC GS1524ACKDE3
IC101	6-705-968-01	s IC S-89431ACNC-HBV-TFG
IC200	6-706-220-01	s IC LTC3411EMS#TR
IC201	6-706-481-01	s IC TC7SET32FU(T5RSOJF)
L100	1-414-834-21	s INDUCTOR, CHIP 3.3NH (1005)
L200	1-419-630-21	s COIL, CHOKE 4.7UH
L201	1-414-392-41	s INDUCTOR (SMD) 1.0UH
Q1	6-551-265-01	s TRANSISTOR SI2307BDS-T1
R100	1-208-860-81	s RES, CHIP 75 (1005)
R101	1-208-860-81	s RES, CHIP 75 (1005)
R104	1-208-915-81	s RES, CHIP 15K (1005)
R105	1-208-887-81	s RES, CHIP 1.0K (1005)
R106	1-208-911-81	s RES, CHIP 10K (1005)

(RX-105 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R108	1-220-878-81 s	RES, CHIP 22 (1005)
R109	1-208-887-81 s	RES, CHIP 1.0K (1005)
R110	1-220-878-81 s	RES, CHIP 22 (1005)
R111	1-220-878-81 s	RES, CHIP 22 (1005)
R114	1-220-878-81 s	RES, CHIP 22 (1005)
R115	1-208-895-81 s	RES, CHIP 2.2K (1005)
R116	1-208-895-81 s	RES, CHIP 2.2K (1005)
R117	1-220-878-81 s	RES, CHIP 22 (1005)
R118	1-208-859-81 s	RES, CHIP 68 (1005)
R119	1-208-911-81 s	RES, CHIP 10K (1005)
R120	1-208-911-81 s	RES, CHIP 10K (1005)
R122	1-208-911-81 s	RES, CHIP 10K (1005)
R125	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R126	1-218-990-81 s	CONDUCTOR, CHIP (1005)
R200	1-208-943-81 s	RES, CHIP 220K (1005)
R201	1-208-943-81 s	RES, CHIP 220K (1005)
R202	1-208-915-81 s	RES, CHIP 15K (1005)
R203	1-208-935-81 s	RES, CHIP 100K (1005)
R204	1-208-887-81 s	RES, CHIP 1.0K (1005)
R205	1-208-943-81 s	RES, CHIP 220K (1005)
R206	1-208-935-81 s	RES, CHIP 100K (1005)
R207	1-208-883-81 s	RES, CHIP 680 (1005)
R208	1-208-931-81 s	RES, CHIP 68K (1005)
R209	1-208-919-81 s	RES, CHIP 22K (1005)
R210	1-208-887-81 s	RES, CHIP 1.0K (1005)
R211	1-220-878-81 s	RES, CHIP 22 (1005)
R212	1-208-943-81 s	RES, CHIP 220K (1005)
R213	1-208-887-81 s	RES, CHIP 1.0K (1005)
R214	1-208-887-81 s	RES, CHIP 1.0K (1005)
R221	1-208-911-81 s	RES, CHIP 10K (1005)
TP1	1-535-757-21 s	CHIP, CHECKER
VDR1	1-802-245-11 s	ESD SUPPRESSOR

PACKING MATERIALS & SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP Description
3pcs	3-729-076-01 s	SCREW (+B) (2X3)

1-7. CBK-SC02

IV-59 BOARD

Ref. No. or Q'ty	Part No.	SP Description
C100	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C101	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C102	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C103	1-164-858-81 s	CAP, CHIP CERAMIC 22PF CH 1005
C104	1-164-882-81 s	CAP,CHIP CERAMIC 220PF CH 1005
C105	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C106	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C107	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C108	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C109	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C110	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C111	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C112	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C113	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C114	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C115	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C116	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C117	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C118	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C119	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C120	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C121	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C122	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C123	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C124	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C126	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C127	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C128	1-100-159-91 s	CAP, CERAMIC 22MF B (SMD) 3216
C129	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C131	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C133	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C134	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C135	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C136	1-100-567-81 s	CAP,CHIP CERAMIC 0.01MF B 1005
C137	1-165-989-91 s	CAP, CERAMIC 10MF (2012)
C138	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C139	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C140	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C141	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C142	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C143	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C144	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C145	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C146	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C147	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C148	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C150	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C151	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
C152	1-125-777-81 s	CAP, CHIP CERAMIC 0.1MF B 1005
CN101	1-785-846-91 o	CONNECTOR, BOARD TO BOARD 40P
E100	1-535-877-22 s	CHIP, CHECKER
IC100	6-705-954-01 s	IC XV750CG1-01
IC101	6-702-231-01 s	IC LMH6642MFX/NOPB
IC102	8-749-018-41 s	IC SI-3025LSA-TL
IC103	6-702-231-01 s	IC LMH6642MFX/NOPB
IC104	6-707-853-01 s	IC TC74LCX541FT(EKJ)
IC105	8-759-287-55 s	IC TC7S66FU(TE85R)

(IV-59 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC106	6-706-487-01	s IC TC7SH08FU(T5RSOYJF)
IC107	6-703-238-01	s IC TC7WZ34FK(TE85R)
IC108	6-702-879-01	s IC R3112N281A-TR-FA
IC109	8-759-598-42	s IC TC7WH00FK(TE85R)
L100	1-412-983-41	s INDUCTOR, SMALL TYPE 2.2UH
L101	1-414-398-41	s INDUCTOR (SMD) 10.0UH
L102	1-414-398-41	s INDUCTOR (SMD) 10.0UH
Q100	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q101	6-551-266-01	s TRANSISTOR SI2304BDS-T1
Q102	6-551-265-01	s TRANSISTOR SI2307BDS-T1
Q104	8-729-928-82	s TRANSISTOR DTC144EE-TL
Q105	8-729-928-28	s TRANSISTOR DTA144EE-TL
Q106	8-729-928-28	s TRANSISTOR DTA144EE-TL
R100	1-208-895-81	s RES, CHIP 2.2K (1005)
R101	1-208-895-81	s RES, CHIP 2.2K (1005)
R102	1-218-990-81	s CONDUCTOR, CHIP (1005)
R103	1-208-860-81	s RES, CHIP 75 (1005)
R104	1-208-860-81	s RES, CHIP 75 (1005)
R105	1-218-990-81	s CONDUCTOR, CHIP (1005)
R106	1-208-879-81	s RES, CHIP 470 (1005)
R107	1-242-967-81	s RES, CHIP 1.0 (1005)
R108	1-242-967-81	s RES, CHIP 1.0 (1005)
R109	1-242-967-81	s RES, CHIP 1.0 (1005)
R110	1-208-911-81	s RES, CHIP 10K (1005)
R111	1-218-990-81	s CONDUCTOR, CHIP (1005)
R112	1-208-911-81	s RES, CHIP 10K (1005)
R114	1-220-878-81	s RES, CHIP 22 (1005)
R115	1-220-878-81	s RES, CHIP 22 (1005)
R116	1-208-899-81	s RES, CHIP 3.3K (1005)
R117	1-208-899-81	s RES, CHIP 3.3K (1005)
R118	1-208-951-81	s RES, CHIP 470K (1005)
R119	1-208-951-81	s RES, CHIP 470K (1005)
R120	1-208-887-81	s RES, CHIP 1.0K (1005)
R121	1-208-887-81	s RES, CHIP 1.0K (1005)
R122	1-208-951-81	s RES, CHIP 470K (1005)
R123	1-220-878-81	s RES, CHIP 22 (1005)
R124	1-208-911-81	s RES, CHIP 10K (1005)
R125	1-208-911-81	s RES, CHIP 10K (1005)
R127	1-208-911-81	s RES, CHIP 10K (1005)
R128	1-208-911-81	s RES, CHIP 10K (1005)
R130	1-218-990-81	s CONDUCTOR, CHIP (1005)
R133	1-218-990-81	s CONDUCTOR, CHIP (1005)
R134	1-208-911-81	s RES, CHIP 10K (1005)
R135	1-208-911-81	s RES, CHIP 10K (1005)
R136	1-208-935-81	s RES, CHIP 100K (1005)
R137	1-218-990-81	s CONDUCTOR, CHIP (1005)
RB100	1-234-370-21	s RES, NETWORK 22 (1005X4)
RB101	1-234-370-21	s RES, NETWORK 22 (1005X4)
TP100	1-535-877-22	s CHIP, CHECKER
X100	1-795-831-12	s OSCILLATOR, CRYSTAL (VCXO)3.3V

PACKING MATERIALS & SUPPLIED ACCESSORIES

Ref. No. or Q'ty	Part No.	SP Description
2pcs	3-855-938-01	s SCREW

