


PACKAGE DRAW

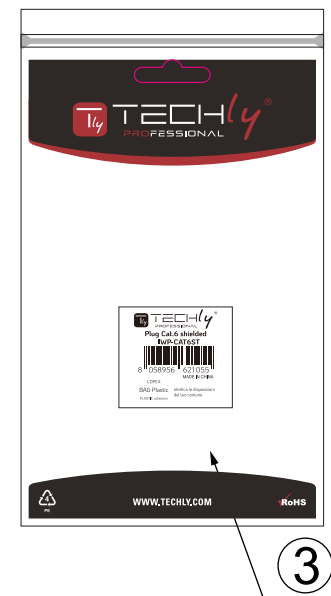

Notes:

- Rated Current: $\leq 1.5A$.
- Rated Voltage: $\leq 150V$ AC.
- Insulation Resistance: ≥ 1000 M Ω @ 500V DC.
- Contact Resistance: 20 m Ω .
- Dielectric Withstanding Voltage:
- Contact Pin to Contact Pin: 1000 V AC/DC PEAK@0.5mA / munite;
- Contact Pin to Shell: 1500 V AC/DC PEAK@0.5mA / minute.
- Retention Strength: $\geq 50N$ for 60s \pm 5s.
- Insertion Life: ≥ 750 mating cycles.
- Insertion Force: $\leq 20N$.
- Operation Temperature: -25 to 55°C.
- Storage Temperature: -10 to 40°C / <80%RH.
- RoHS 2.0 Compliant, REACH Compliant.

MATERIAL LIST

③	PACKAGE	TECHly PE ZIP BAG
②	CONTACT PIN	MATERIAL: PHOSPHOR BRONZE, 3 PRONGS, T=0.35, GOLD PLATED
①	PLUG BODY	MATERIAL: PC + COPPER ALLOY SHELL, NICKEL PLATED
No.	PART NAME	DESCRIPTION



P/N: IWP-CAT6ST - Art.: 621055