

Libec

LX	New
RS	New
Remote Control	New
Accessories	New

LX / RS



Libec

HEIWA SEIKI KOGYO CO.,LTD. - Headquarters

978-1 Nishibukuro,Yashio-City,Saitama, 340-0833 Japan

TEL: +81(0) 48 995 1301

FAX: +81(0) 48 997 0804

www.libec-global.com

Libec Sales of America, Inc - U.S. Sales office

377 Van Ness Av., Suite 1201 Torrance, CA 90501 USA

TEL: +1 310 787 9400

FAX: +1 310 787 9422

www.libecsales.com

LX New

Best value in the range



- Trace every motion from start to finish with its supreme torque system
- Outstanding rigidity and payload. Completely new tripod design.
- A high-grade spreader and large rubber feet included with standard package
- Equipped with a sliding plate (sliding range of +/-40mm / 1.6") and 3/8" spare screw*

*3/8" spare screw only equipped in LX7 and LX7 M.



LX5 New



Weight	5.5kg / 12.1lb
Height	56 to 166cm / 22.0 to 65.5"
Ball diameter	75mm
Section	2STAGE


LX5 M New



Weight	5.2kg / 11.4lb
Height	81 to 165.5cm / 32.0 to 65.0"
Ball diameter	75mm
Section	2STAGE



Payload	4kg / 9.0lb
Counterbalance	FIX
Drag mode	FIX
Tilt angle	+90° / -80°
Temperature range	-20°C / -4°F to +60°C / +140°F
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin

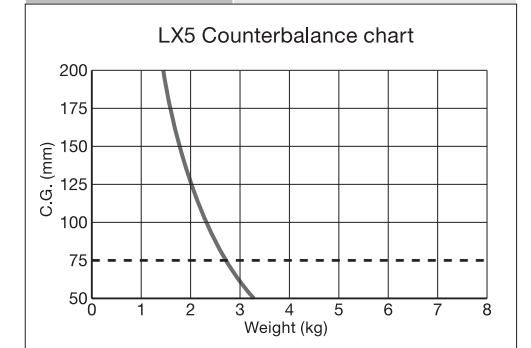

LX7 New



Weight	5.5kg / 12.1lb
Height	56 to 166cm / 22.0 to 65.5"
Ball diameter	75mm
Section	2STAGE


LX7 M New



Weight	5.2kg / 11.4lb
Height	81 to 165.5cm / 32.0 to 65.0"
Ball diameter	75mm
Section	2STAGE



Payload	8kg / 17.5lb
Counterbalance	FIX
Drag mode	FIX
Tilt angle	+90° / -80°
Temperature range	-20°C / -4°F to +60°C / +140°F
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	3/8" screw

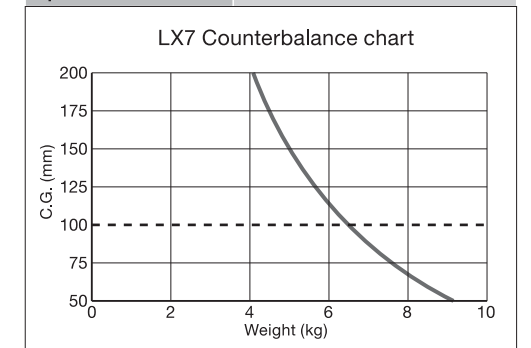

RS

The technology you can reach

- **Ideal counterbalance**
- **Impeccable camerawork thanks to a new drag system**
- **Low-temperature characteristics represent a giant leap forward compared to conventional sets**
- **Outstanding rigidity. Completely new tripod design.**

Advanced RS series with upgraded functions **New**

Equipped with LED bubble level

250/350 series now provided with a LED bubble level.

Maximum height of 173cm/68.0"

(450 series only)


Increased maximum height for the RT40RB(with a floor spreader attached) is 6cm/2.5" higher than our previous models.

Advanced designed extendable panhandle

All equipped with extendable panhandles and rubber grips for precise camera movements.

A new tripod case with highly developed durability and usability (450 series only)


The RC-50 is a sophisticated tripod case equipped with a bottom protector, shoulder pad and handle grip.

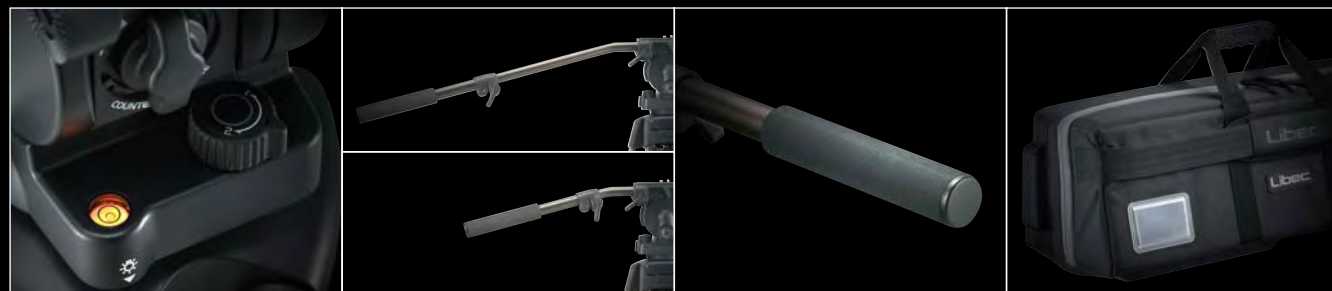

RH25R **New**



Counterbalance range	1.8 to 5kg / 4.0 to 11.0lb
Payload	6kg / 13.0lb
Counterbalance	Continuous
Drag mode	2STEP
Tilt angle	+90° / -70°
Temperature range	-40°C / -40°F to +60°C / +140°F
Bubble level	Illuminated
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	1/4" and 3/8" screws
Weight	2.5kg / 5.5lb

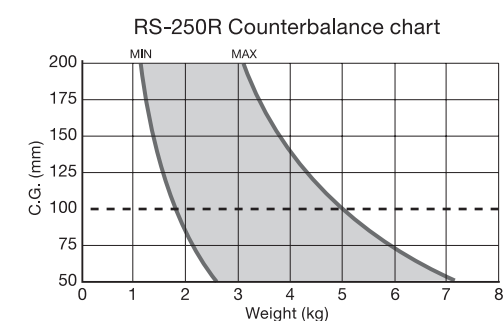

*When the innerspring is set to maximum strength, the tilt angle is limited to +/-40 degrees.

RS-250R **New**

RH25R / RT30B / SP-2B / RC-30
System with floor spreader



Weight	6kg / 13.2lb
Height	55 to 165cm / 21.5 to 65.0"
Ball diameter	75mm
Section	2STAGE

RS-250RM **New**

RH25R / RT30B / BR-2B / FP-2B / RC-30
System with mid-level spreader




Weight	5.7kg / 12.5lb
Height	80 to 164.5cm / 31.5 to 65.0"
Ball diameter	75mm
Section	2STAGE



RH35R New




Counterbalance range	3 to 7.5kg / 6.5 to 16.5lb
Payload	9kg / 20.0lb
Counterbalance	Continuous
Drag mode	Free plus 3STEP
Tilt angle	+90° / -70°
Temperature range	-40°C / -40°F to +60°C / +140°F
Bubble level	Illuminated
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	1/4" and 3/8" screws
Weight	2.7kg / 5.9lb

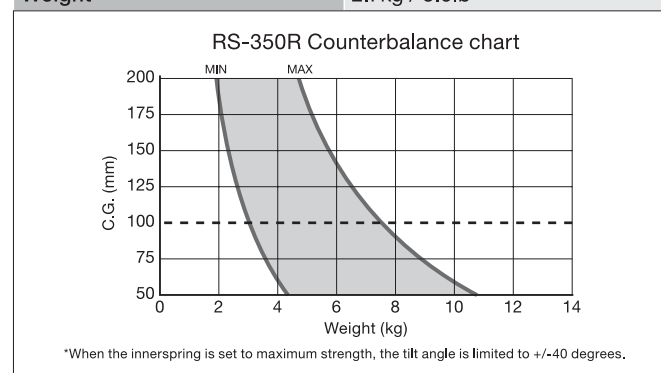

RH45R New



Counterbalance range	4.5 to 10.5kg / 10.0 to 23.0lb
Payload	12kg / 26.5lb
Counterbalance	Continuous
Drag mode	Free plus 3STEP
Tilt angle	+90° / -70°
Temperature range	-40°C / -40°F to +60°C / +140°F
Bubble level	Illuminated
Camera plate	Sliding plate
Sliding range	+/-40mm / 1.6"
Plate attachment	1/4" screw with video pin
Spare screw	1/4" and 3/8" screws
Weight	2.7kg / 5.9lb

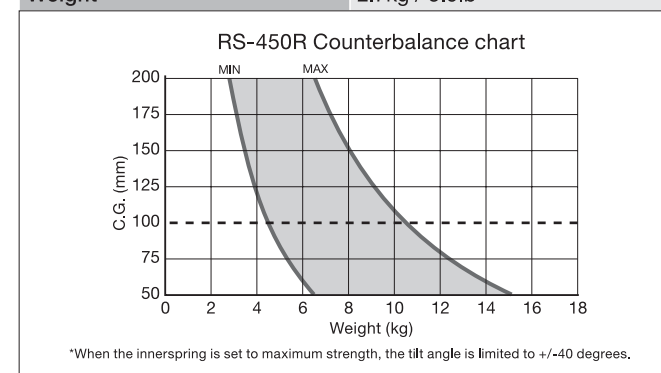

RS-350R New

RH35R / RT30B / SP-2B / RC-30
System with floor spreader



Weight	6.2kg / 13.6lb
Height	56 to 166cm / 22.0 to 65.5"
Ball diameter	75mm
Section	2STAGE

RS-350RM New

RH35R / RT30B / BR-2B / FP-2B / RC-30
System with mid-level spreader



Weight	5.9kg / 13.0lb
Height	81 to 165.5cm / 32.0 to 65.0"
Ball diameter	75mm
Section	2STAGE

RS-450R New

RH45R / RT40RB / SP-2B / RC-50
System with floor spreader



Weight	6.7kg / 14.7lb
Height	63 to 173cm / 25.0 to 68.0"
Ball diameter	75mm
Section	2STAGE

RS-450RM New

RH45R / RT40RB / BR-4B / FP-2B / RC-50
System with mid-level spreader



Weight	6.5kg / 14.3lb
Height	85 to 173cm / 33.5 to 68.0"
Ball diameter	75mm
Section	2STAGE

Zoom and focus control for LANC(Sony/Canon) and Panasonic cameras
ZFC-5HD *New*

All-in-one zoom and focus control for LANC(Sony/Canon) and Panasonic cameras




The ZFC-5HD offers precise and variable zoom speed control available for LANC*(Sony/Canon) and Panasonic cameras, controlled by a selector switch. Equipped with a 2-step zoom speed control for LANC cameras. In addition, the ZFC-5HD is equipped with a focus control button for LANC and a focus dial for Panasonic cameras. Exclusively for LANC cameras, the ZFC-5HD has an on/off remote power switch function which allows your camera to power on/off remotely. This is ideal when shooting with a jib arm or crane. Can be clamped on various equipment: tripod panhandles, jib arm and crane weight bars, stabilizers, monopods and other accessories.

*LANC is a registered trademark of Sony Corporation.

	LANC	Panasonic
Zoom	✓	✓
Focus	✓	✓
REC/STOP	✓	✓
Zoom speed switch	✓	
Camera power ON/OFF	✓	
Weight	0.16kg / 0.4lb	
Size	75 x 50mm / 3 x 2"	
Cable length	0.7m / 2.3'	

The end of the cable splits into two parts with 2.5mm submini-jack and 3.5mm mini-jack on each end. When using Panasonic cameras, simultaneous control of zoom and focus can be achieved by plugging 2.5mm and 3.5mm jacks into the zoom and focus terminals, respectively.

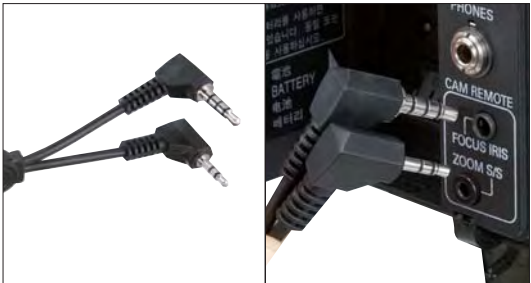

Extension focus cable for Panasonic cameras
EX-530HD *New*



Length 5.3m / 17.5'


Zoom control for LANC(Sony/Canon) and Panasonic cameras
ZC-3DV

Universal controller for LANC and 2.5mm submini-jack, simply change the switch.



Zoom control for ENG lenses
ZC-9Pro

Can be used with both Canon and Fujinon lenses by simply changing the switch.

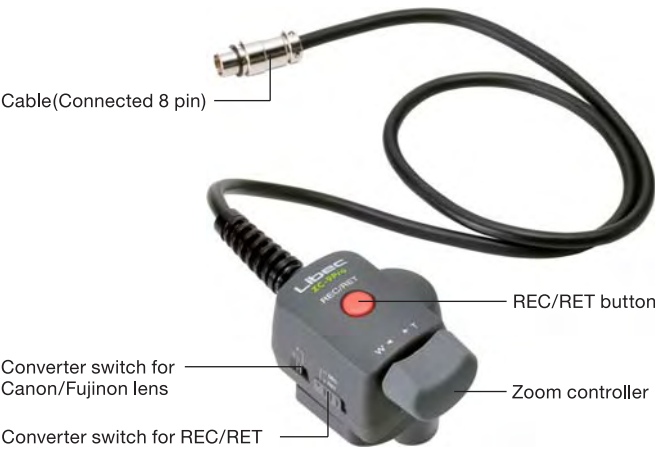

SONY PMW-EX cameras connectable zoom control
ZC-9EX

Can be used same as the ZC-9Pro by just removing the EX adapter.



*The function is not available for XDCAM EX cameras.

Extension zoom cable for LANC (Sony/Canon) and Panasonic cameras
EX-530DV *New*



Length 5.3m / 17.5'

Extension zoom cable for ENG lenses
EX-530Pro *New*



Length 5.3m / 17.5'

12pin adapter
A-12P

Use for 12pin connector



SONY PMW-EX cameras adapter cable
A-9EX New

The A-9EX is a conversion adapter that allows you to connect Sony's PMW-EX cameras to zoom controls for Fujinon's ENG lenses.



LANC/AV adapter cable
A-3AV

A-3AV is a conversion cable that allows you to connect LANC* zoom control to Sony handycam* equipped with AV remote terminal.

*LANC and Handycam are registered trademarks of Sony Corporation.



Tripod case
RC-50 New

The RC-50 is a stylish tripod case, designed for quick and easy storage of your tripod, with its high durability and lightweight portability

- Designed with end-to-end wide openings, providing quick and easy access to your tripod
- Surfaces are fully equipped with solid padding to provide shock protections during transportation
- Made of water resistant PU coated polyester equipped with a heavy-duty zip fastener
- The bottom protector absorbs external impacts during transportation
- Designed for a comfortable use, the main handle is plastic-gripped, a tough side-handle is attached, and also comes with padded shoulder strap
- Equipped with an inner pocket to store accessories such as a panhandle



Padded shoulder strap



Protector



Inner pocket with zipper



Handle grip



Side handle

Adapter plate
AP-1



Built from magnesium material, it's rigid with a light weight of only 200g/0.4lb. The AP-1 helps you to instantly attach a small handheld camera to a tripod adapter.



Adapter plate
AP-5 New



The AP-5 includes a camera platform and sliding plate. Using the 1/4" and 3/8" screw holes on its base, you can mount the platform on various camera support equipment. In addition, the side surface of the platform has 1/4" and 3/8" screw holes for attaching accessories. 1/4" and 3/8" spare screws are included and stored in the platform.

Weight	0.4kg / 1.0lb
Sliding range	80mm / 3.1"



Accessory support kit
AS-7K (A-7 included)



A multiple accessory support that supports mounting of LCD monitors and other accessories.

Length	261mm / 10.3"
Attachment	1/4" screw
Weight	0.35kg / 0.8lb

Can be attached to cameras and accessory plates and also Libec heads by using accessory support adapter included in the kit*. Fitting angle can be adjusted flexibly that enables suitable positioning of accessories.



*Not attachable to TH-650DV

Accessory support adapter
A-7



Can be attached to Libec heads and jib arms. *Accessories can be fitted by using 1/4" and 3/8" screw holes.

*Not attachable to TH-650DV.