


LIFTO 25 Overview

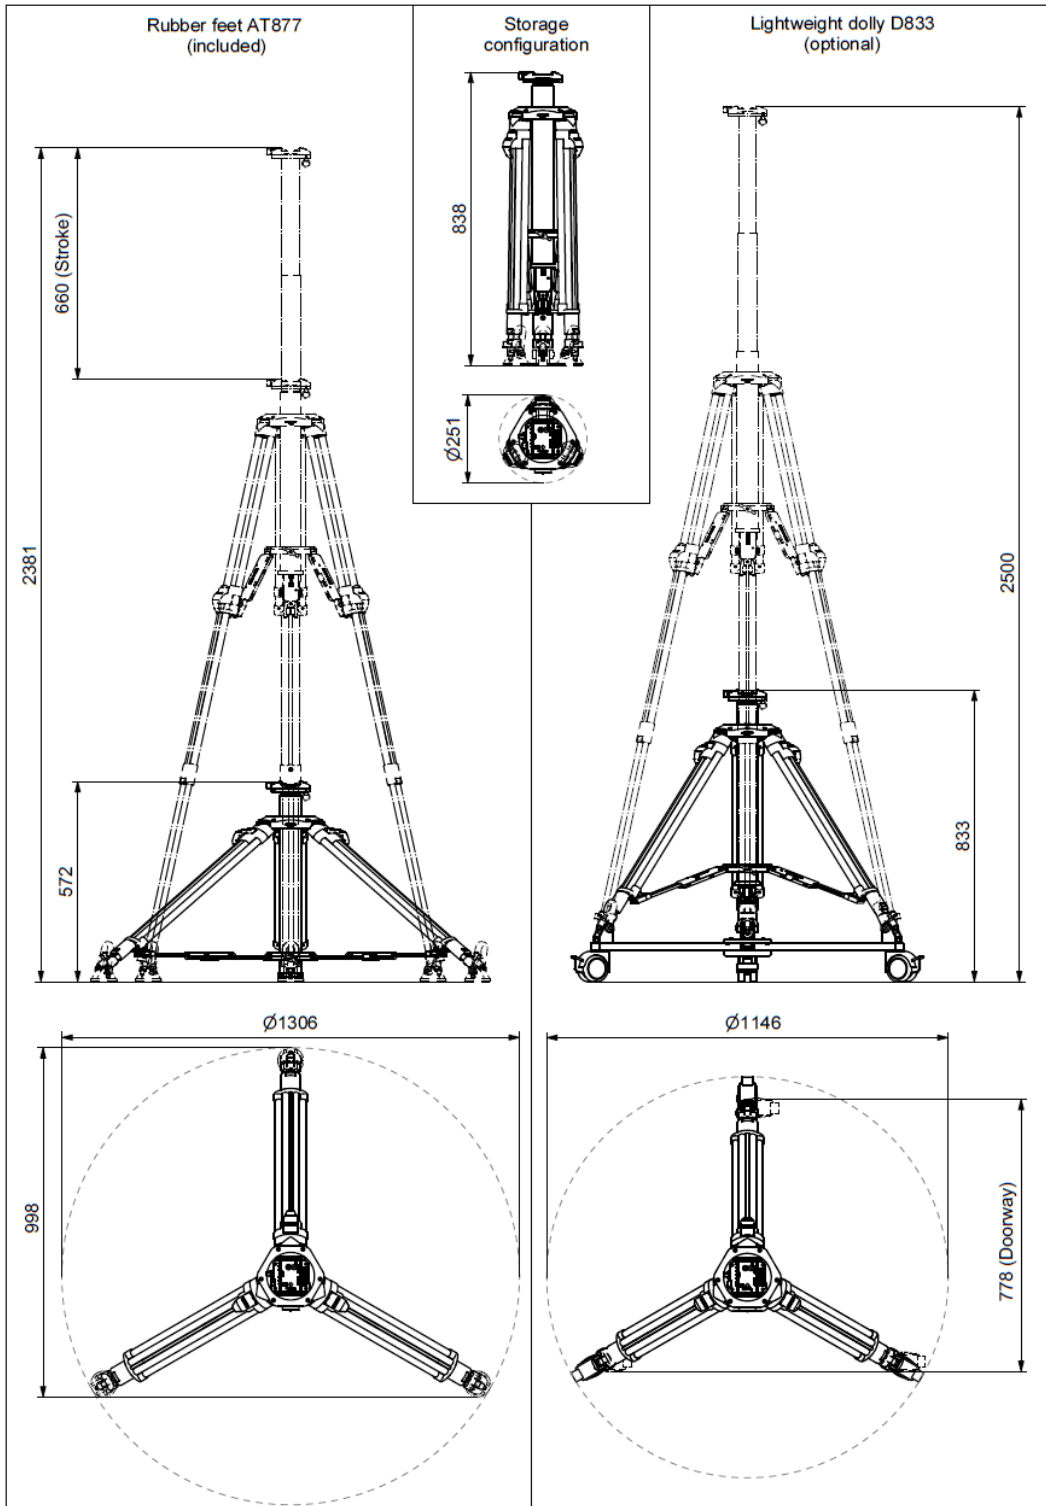

Stroke	660mm
Speed	38 mm/s
Payload	25 kg [55.1 lbs]
Weight	11.8 kg [26 lbs]
On-air operation mode	Yes

1 LIFTO25

1.1 TECHNICAL SPECIFICATIONS

Weight	11.8 kg [26 lbs]
Maximum payload	25 kg [55.1 lbs]
Speed	38 mm/s
Column interface fixing method	Quick release camera plate
Stroke	660 mm [26 in]
Minimum height	572 mm [22.5 in]
Maximum height (feet)	2381 mm [93.7 in]
Maximum height (dolly)	2500 mm [98.4 in]
Overall dimensions (storage)	φ251 x 838 mm [φ9.9 x 33 in]
Footprint diameter (minimum height)	1306 mm [51.4 in]
Input voltage	24 V
Maximum current consumption	12.5 A
Duty cycle	10 %
Working temperature range	-10°C/+40°C [14°F/104°F]
Storage temperature range	-20°C/+70°C [-4°F/158°F]

Table 1: LIFTO 25 technical specifications.

1.2 OTHER FEATURES

- Quick release camera plate;
- Soft start/stop;
- 3 storable positions;
- Ultra-silent operation;
- On-air operation mode available.

2 POWER SUPPLY

2.1 TECHNICAL SPECIFICATIONS

Weight	0.5 kg [1.1 lbs]
Overall Dimensions	265 × 96 × 38 mm [10.4 × 3.8 × 1.5 in]
Input voltage	100 – 240 VAC, 50 – 60 Hz
Maximum current consumption	12.5 A
Minimum power consumption (standby)	0.1 W
Working temperature range	-10°C/+40°C [14°F/104°F]
Storage temperature range	-20°C/+70°C [-4°F/158°F]

Table 2: Power supply technical specifications.

2.2 OTHER FEATURES

- Electronic overload protection (EOP);
- Drive up to 4 LIFTO 25 at the same time;
- Auto-detection of the number of connected LIFTO 25.

3 INPUT DEVICE

3.1 TECHNICAL SPECIFICATIONS

Weight	0.1 kg [0.2 lbs]
Overall dimensions	93 × 19 × 15 mm [3.7 × 0.7 × 0.6 in]
Connector	RJ45
Cable lenght	1.7 m [5.6 ft]
Working temperature range	-10°C/+40°C [14°F/104°F]
Storage temperature range	-20°C/+70°C [-4°F/158°F]

Table 3: Input device technical specifications.

3.2 OTHER FEATURES

- 3 storable positions;
- Extendable wiring up to 50m [164 ft] (RJ45 coupler included);
- Optional bluetooth remote control available.

4 IN THE BOX

- LIFTO 25;
- Rubber feet (AT871);
- Quick release camera plate (AH943);
- Power supply;
- Input device;
- Motor cable 2.5 m [8.2 ft];
- Motor cable extension 2 m [6.6 ft];
- RJ 45 coupler;
- EU power plug;
- Self-winding cables protective sock;
- Safety ring (wiring strain relief + PTZ safety leash).

5 OPTIONALS

- Lightweight dolly (D833);
- PTZ T-bar (APTZ001);
- PTZ Universal plate (APTZ003);
- Case PP Tube (C940);
- Bluetooth remote control (TX/RX);
- Battery power supply adapter.