



MGW Nano Encoder



MGW Nano Encoder

Portable MPEG-4 H.264 encoding and streaming appliance featuring Full HD processing, HD/SD-SDI and HDMI inputs, KLV / STANAG metadata support and Error-free content delivery using Zixi™ technology and ProMPEG FEC.

Technical Specifications - General

Video Inputs

- 1 x HD-SDI/SD-SDI (SMPTE 259M-C, SMPTE 292M, SMPTE 274M, SMPTE 296M, SMPTE 424M, SMPTE 425M)
- 1 x HDMI (support for HDCP and non-HDCP protected sources)

Input Resolutions / frame rates:

1920x1080p @ 60, 59.94, 50, 30, 29.97, 25, 24 Hz

1920x1080i @ 60, 59.94, 50 Hz

1600x1200p @ 85, 60, 50 Hz

1366x768p @ 60, 50 Hz

1280x800p @ 60, 50 Hz

1280x768p @ 60, 50 Hz

1024x768p @ 60, 50 Hz

1280x720p @ 60, 59.94, 50, 30, 29.97, 25 Hz

720x480p @ 30, 29.97 Hz

720x480i @ 59.94 Hz

720x576p @ 25 Hz

720x576i @ 50 Hz

Audio Inputs

- 1 x SDI Embedded audio (Stereo and Mono)
- 1 x HDMI Embedded audio (Stereo and Mono)

Video Output

- H.264 (ISO/IEC 14496-10 AVC MPEG-4 part 10). Modes:
 - o Baseline Profile L3
 - o Main Profile L3 and L4
 - o High Profile L4 and L4.1
- Bit Rate: 100 Kbps - 14 Mbps
- Frame Rate: 5-60 fps. Down sampling modes: third, half, three quarters
- Bit Rate Regulation Modes: Constant (CBR), Variable (VBR)
- Output Resolutions: Configurable from QCIF up to 1920x1080p30 / 1280x720p60
- Encoding Latency: 65 milliseconds (TurboVideo™ mode)



Audio Output

- MPEG-4 AAC-LC (ISO/IEC 14496-3), MPEG-1 L2
- Stereo and mono modes
- Bit Rate: 32Kbps - 256Kbps in Stereo, 16Kbps - 128Kbps in Mono
- Sampling Rate: 16 kHz - 48 kHz

Network Protocols

- Streaming:
 - UDP, RTP, RTSP, SAP, MPEG-2 Transport encapsulation, unicast and multicast modes
- Error Correction:
 - Zixi™ technology for up to 30% packet loss recovery
 - SMPTE-2022 ProMPEG Forward-Error-Correction (FEC)
- Peripheral:
 - HTTPS, DHCP, NTP, SSH, SAP

Management

- Secure Web based remote management interface (HTTPS)
- Dashboard with dynamically updating I/O signal detection and streaming stats
- SSH interface with "get/set" or XML API for integration with 3rd party control software
- Autostart mode recovers saved configuration after power cycle
- Remote firmware and software upgrade capability via command line
- System and channel event logging

Security

- Real-time AES encryption for video, audio and metadata. Interoperability with EZ TV and FITIS systems.
- Password protected HTTP and CLI control interfaces

Metadata

- CoT over serial RS-232, KLV over IP, KLV over SDI (VANC per SMPTE 336M)
- UAS Datalink Local Metadata Set (MISB STD 0601.5, STD 0902)
- Time Stamping and Transport of Compressed Motion Imagery and Metadata (MISB STD 0604.2)
- Cursor on Target (CoT) Conversions to Key- Length-Value (KLV) Metadata (MISB EG 0805)
- Security Metadata Universal and Local Sets for Digital Motion Imagery (MISB STD 0102.8)
- STANAG 4609 output stream over UDP/IP

Environmental/Regulation

- Operating Temperatures: -40° C to +70° C (-40° F to +158° F)
- Relative Humidity: 5% to 95% (non-condensing)
- MTBF: Ground – 9.00 years. Airborne – 12.70 years (As per MIL-HDBK-217F)
- EMC Standards: FCC part 15 class A and CE
- MIL-STD810F Certified
- Not controlled under ITAR
- TAA Compliant

Physical

- 1.41" H x 5.46" W x 4.66" D (36.00mm H x 138.85mm W x 118.5mm D)
- 1.44lb (0.65Kg)
- Enclosure: Industrial-grade rugged aluminum case, rack-mount kit available as add-on
- Status LED's for power, network activity, streaming and video source indications
- Fan-less, no moving parts design, 100% silent operation
- Adjustable mounting holes for seamless installation in vehicles / flat surface

Advanced Features


- Low latency HD streaming from SDI or HDMI sources with metadata
- Hardware based resolution and frame rate scaling
- Real-time image stabilization and image cropping (Area of Interest isolation)
- Motion-adaptive adjustment of bit-rate utilization in static scenes
- Built-in Zixi and ProMPEG FEC Error correction technologies

Ordering Information

- 14245 → MGW Nano SD
- 13678 → MGW Nano HD
- 14315 → MGW Nano HD TS (UDP TS only)

Customers may upgrade SD units to HD by purchasing a firmware upgrade

Rear Panel Interfaces

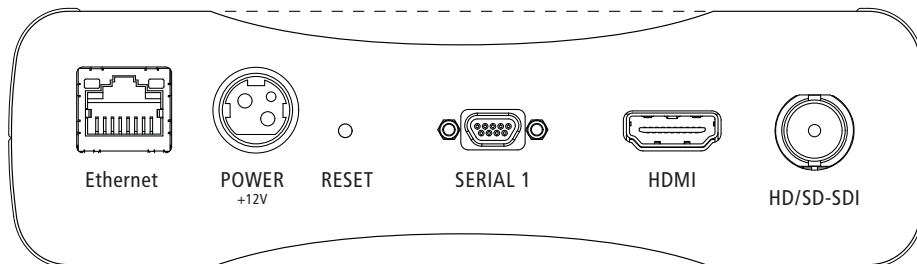

USA, East Coast
2200 Century Parkway NE
Suite 900
ATLANTA, GA 30345
USA
T: +1-(404)-320-0110
E: atlanta@vitec.com

USA, West Coast
931 Benecia Avenue
SUNNYVALE, CA 94085
USA
T: +1-(800)-451-5101
E: sunnyvale@vitec.com

FRANCE
99 rue Pierre Sépard
92320 CHATILLON
France
T: +33-(0)1-46-73-06-06
E: france@vitec.com

GERMANY
Lise-Meitner-Str.15
24223 SCHWENTINENTAL
Germany
T: +49-(0)4307-8358-0
E: germany@vitec.com

UNITED KINGDOM
LONDON, UK
T: +44-79-71-54-25-21
E: uk@vitec.com

ISRAEL
11 Galgalei Haplada St.
HERZLIYA 4672211
ISRAEL
T: +972-(0)9-9709-200
E: israel@vitec.com