

P Series

P401W, P451X, P451W and P501X digital projectors

Easy to use and at the right price, P Series projectors provide all the essential features that you need to connect with your audience. Highlighted by enhanced connectivity and bright images, these models are ideal for entry-level integration environments such as corporate boardrooms, higher education classrooms and government training rooms.

Essential Features for Integration

- With XGA and WXGA native resolutions, high brightness up to 5000 lumens and patented NEC technologies, P Series projectors display impressive image quality
- Remarkable contrast ratio (4000:1) enhances your image
- Powerful 16-watt speaker provides volume needed for large rooms
- Vertical lens shift provides for flexible installation
- Terminal cover easily hides cables to create a clean environment while deterring unintentional access
- Versatile, color-coded connections to computer, video sources and external monitor

Top cover lamp change

This feature provides for easy lamp changes without removal of the projector from the mount.



Active lens cover

This cover enables presenters to immediately mute the audio and video, then seconds later lower the lamp brightness to 25% for a short period of time.



6000-hour filter life

NEC is committed to designing its products to provide long lifecycles. This commitment even extends to components within its products, including the improved filter. This virtually maintenance-free filter reduces the frequency at which cleaning is required, thereby decreasing your total cost of ownership.




Designed with the Environment in Mind

- Extended lamp life with ECO Mode™ technology increases lamp life up to 6000 hours, while lowering power consumption
- Power management enables projector to automatically turn off when an incoming signal is not detected from any of the inputs
- Auto Power On via the RGB (15-pin) input connector when a signal is detected from a computer
- Carbon savings meter calculates the positive effects of operating the projector in ECO Mode, which is encouraged by an optional message at startup. A green ECO Mode button on the remote control makes the switch easy.
- Quick start (3 to 4 seconds) lets you begin presenting in seconds while quick shutdown (immediate power off with no cooling required after shutdown) ensures efficient energy usage
- Sleep timer can be set to automatically turn off the projector at set countdown times
- Low power consumption (0.2W in stand-by mode) minimizes energy costs
- Direct power off provides instantaneous shutdown of the projector



Advanced Networking Capabilities

- Integrated RJ45 connection for quick connection to the LAN (10/100 base-T capability)
- Integrated high-speed wireless LAN IEEE 802.11b/g/n (Wireless LAN module optional)
- Remote diagnostics enable the user to monitor and make adjustments to the projector remotely
- PC CTL 4.0 controls the power switching input selection and other functions while managing lamp usage and a variety of other vital information over the network. Email notification and projector scheduling for better asset management is included with the software.
- Image Express Utility dedicated projector software (IEU 2.0; compatible with Windows or Mac operating systems) provides wired and wireless data transmission via peer-to-peer or over the network
- Broadcast mode allows you to send information from one computer to several projectors
- Image Express Lite dedicated projector software provides wired and wireless data transmission via peer-to-peer or over the network
- Windows Network Projector function within Windows Vista connects directly to networked projectors without the need for additional proprietary software
- Windows Remote Desktop function allows you to control a networked computer by connecting a USB mouse and keyboard directly to the projector's USB input
- Windows Media Connection and Network Drive functions display multimedia files (.jpeg, .bmp, .png, .mpeg2 or .wmv9) stored on the Windows Media Connect server, in the Windows shared folder, or on a local network using the Viewer function—all without bringing your PC into the conference room
- Crestron Roomview

Example of wireless LAN connection
(Network Type → Infrastructure)

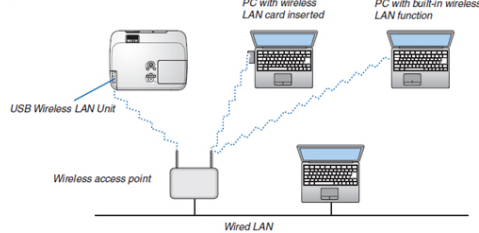

Example of wireless LAN connection (Network Type → Ad Hoc)

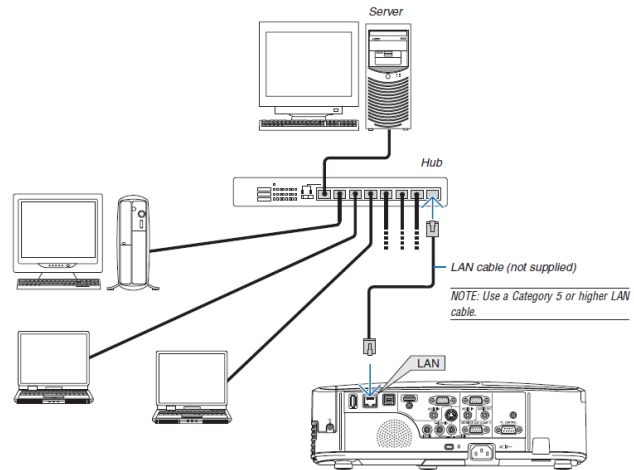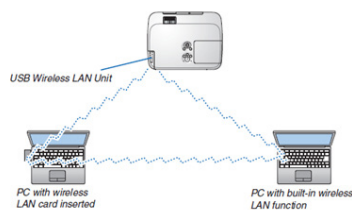

Built-In Software


Built-in wall color correction presets

These provide for adaptive color tone correction to display properly on non-white surfaces.


On a
green wall...



BEFORE
auto wall correction



AFTER
auto wall correction



DICOM SIM

DICOM Simulation enables users in medical environments to display accurate diagnostic images.



Advanced Software Features

Virtual Remote™

Used via a network connection (wired/wireless), you can control the projector directly from a computer without the need for additional control cables.



Cornerstone

Enhanced keystone correction allows for horizontal, vertical and diagonal image correction for aligned images even when the projector is set up at an angle to the screen.



Get Connected with a Wide Selection of Inputs

- Dual computer inputs ensure quick switching between presentations
- Four audio inputs (two mini stereo, R/L and HDMI) make it easy to add sound to enhance your presentations

Remote control

Easy control from remote allows you to adjust lamp mode, aspect ratio, volume and image all with the touch of a button.



Dual HDMI inputs

The introduction of dual HDMI (w/ HDCP) inputs allows for simultaneous digital connection of high-definition sources such as Blu-ray players, cable boxes, satellite receivers and personal computers.



Variable audio-out

This input enables the remote control to be used to adjust volume of self-powered external speakers that are connected to the projector. In stand-by mode the audio-out stays active, allowing the last input used to pass to the self-powered external speakers.



USB Viewer

In instances when you'd prefer to leave your laptop behind for a presentation, P Series projectors can deliver a solution. Using the presentation conversion software included with your projector, simply place your file onto a USB drive and plug it into the projector's USB port. This allows you to display images stored as .jpgs from optional USB memory.



USB input


Your connection options go even further with the P Series. Connect your laptop or PC directly to the projector using the USB port and a standard USB cable.



Input panel cover

This optional accessory creates a clean look for your installation, while hiding signal cables and the power cord.



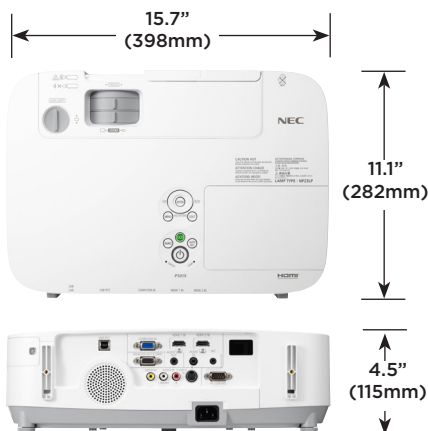

UNIQUE FEATURES

Advanced AccuBlend™ ensures detailed images when non-native resolution sources are connected to the projector

64-step image magnification with location control

Countdown sleep timer can be set to automatically turn off the projector

WARRANTY

Registered owners receive a 3-year parts and labor warranty including the first year of InstaCare. The lamp is covered for one year or 500 hours, whichever comes first. InstaCare provides the original owner one year of either limited 3 business day repair/return or next business day exchange.

SHIPS WITH

Remote control, batteries, power cord, RGB signal cable, built-in lens cover, user's manual on CD-ROM, quick start guide, product registration card, security sticker

ORDERING MODEL NUMBERS

NP-P401W
NP-P451X
NP-P451W
NP-P501X



Specifications for P401W/P451X/P451W/P501X

OPTICAL

Display Technology

Light Output (lumens)

Resolution
Native

Maximum
Contrast Ratio (up to)
Lamp Type

Lamp Life (up to)

Screen Size (diagonal)
Throw Ratio
Projection Distance

Projection Angle
Lens*

Zoom
Focus
F-#, f-#
Shift (vertical)

Keystone Correction

P451X/P501X: 0.63" LCD with MLA
P401W/P451W: 0.59" LCD with MLA
P401W: 4000
P451X/P451W: 4500
P501X: 5000

P451X/P501X: XGA 1024 x 768
P401W/P451W: WXGA 1280 x 800
UXGA 1600 x 1200
4000:1
P401W/P451X: 240W AC
P451W/P501X: 270W
P401W/P451X: 4000 hours normal / 6000 hours eco
P451W/P501X: 3500 hours normal / 6000 hours eco
25 - 300 in., 0.64 - 7.6m

1.3 - 2.2
P451X/P501X: 1.9 - 45.3 ft. / 0.6 - 13.8m
P401W/P451W: 2.3 - 47.8 ft. / 0.69 - 14.6m
0 - 9.8° tele / 0 - 16.5° wide

1.7
Manual
F=1.7 - 2, f=17.4 - 29mm
P451X/P501X: 0 - 0.5V
P401W/P451W: 0 - 0.6V
Manual +/- 30°

SIGNAL COMPATIBILITY/CONNECTIVITY

Scan Rate
Horizontal
Vertical
Supported Video Standards
SD/HD Video Signal Compatibility

HDMI Signal Compatibility
PC Signal Compatibility
Macintosh Compatibility
Input/Output Terminals

RGB1 (analog)
RGB2 (digital)
RGB3 (digital)
RGB4 (digital)
Video 1
Video 2
Audio 1
Audio 2
Audio 3
Audio Out
Monitor Out

Audio
External Control
Sync Compatibility
Microphone
Wireless LAN

15 - 100 kHz
50 - 120 Hz
NTSC, NTSC4.43, PAL, PAL-60, PAL-M, PAL-N, SECAM
1080i, 1080p, 720p, 576p, 576i, 480p, 480i, Y/Cb/Cr component
(with optional adapter - ADP-CV1E)
VGA, SVGA, XGA, WXGA, SXGA, 480p, 576p, 720p, 1080i, 1080p
VGA, SVGA, XGA, SXGA, SXGA+, UXGA
Yes

15 pin, Component video using ADP-CV1E adapter
HDMI w/HDCP
HDMI w/HDCP
USB A Type
RCA
S-Video
L/R RCA (shared by video sources)
1/8 in. stereo
1/8 in. stereo
mini stereo (Variable audio out)
Yes
16W speaker
RS-232, IR, LAN, DDC/CI, USB, Wireless LAN
Separate Sync / Composite Sync / Sync on G
1/8 in. stereo
Optional

ELECTRICAL

Power Requirements
Input Current

Power Consumption (ECO Mode off/
ECO Mode/Standby/Standby-Power Saving)

100 - 240V AC, 50/60Hz
P401W/P451X: 3.9 - 1.7A
P451W/P501X: 4.2 - 1.7A
P401W/P451X: 325W / 231W / 10W / 0.2W
P451W/P501X: 357W / 231W / 10W / 0.2W

MECHANICAL

Installation Orientation
Dimensions (WxDxH)
Net Weight
Fan Noise

Regulations

Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear
15.7 x 11.1 x 4.5 in. / 398 x 282 x 127mm
9 lbs. / 4.1 kg
P401W/P451X: 36 dB normal / 30 dB eco
P451W/P501X: 37 dB normal / 30 dB eco
UL60950-1, CSA60950-1, FCC Part 15 Class B, ICES-03 Class B, NOM-001-SCFI-1993

ENVIRONMENTAL

Operating Temperature
Humidity
Storage

41° - 104°F / 5° - 40°C
20-80% non-condensing
14° - 122°F / -10° - 50°C

ACCESSORIES

NP01MR
NP02LM1
NP03CV
SPKR30
ADP-CV1E
MP300CM
NP01UCM
AEC00609
AEC012018
AEC0203
AEC0305
SCP200
NP23LP
RMT-PJ31
NECEW2-I
ADVEXON2-I

IR receiver enables PJ remote to control PC and MAC functions
802.11b/g/n wireless LAN adapter
Input panel cover
Amplified 30 watt speaker
Component video to VGA adapter
Ceiling mount
Universal ceiling mount for projectors weighing less than 40 pounds
6 to 9 inch adjustable extension column for use with projector mount
12 to 18 inch adjustable extension column for use with projector mount
2 to 3 foot adjustable extension column for use with projector mount
3 to 5 foot adjustable extension column for use with projector mount
Adjustable suspended ceiling plate for use with ceiling mount
Replacement lamp
Replacement remote control
Extends term of parts and labor warranty to 4 years
Extends term of InstaCare service program to 3 years

Additional accessories are available, including screens, carts, mount accessories and replacement cables.
Visit www.necdisplay.com for details.

Advanced AccuBlend, ECO Mode and Virtual Remote are trademarks of NEC Display Solutions. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.

©2013 NEC Display Solutions of America, Inc. All rights reserved.
25.NEC.80.GL.UN.137 rev. 8.26.13

NEC Display Solutions
500 Park Boulevard, Suite 1100
Itasca, IL 60143
866-NEC-MORE

necdisplay.com

NEC