




## accessories ■

A 866

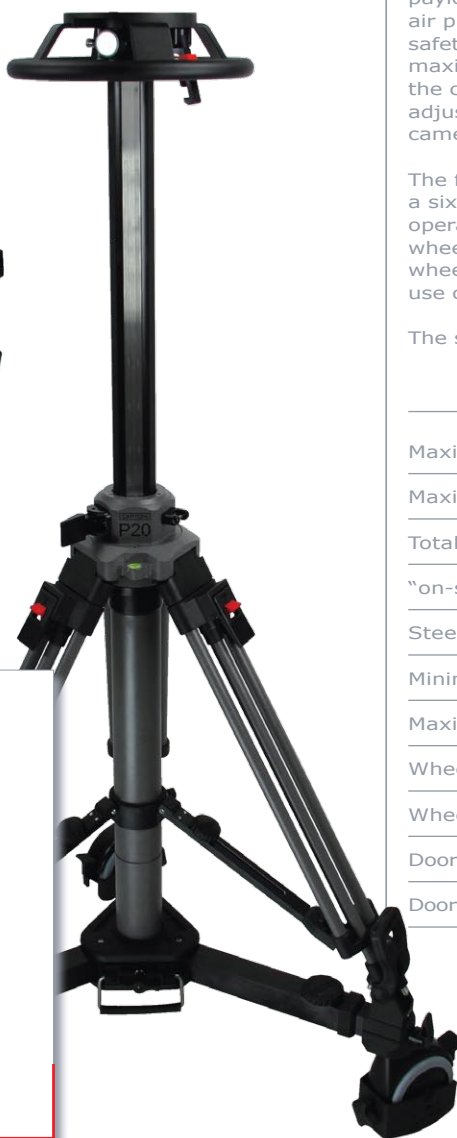

A 869



Extremely compact and lightweight, this **INNOVATIVE PEDESTAL** is the ideal mate for mobile work and lightweight studio needs.

The same technical concept which has made the **P50** so successful is performed in the **CARTONI P20**, an extremely rugged and precise dolly and a pneumatic column for maximum stability, smoothness and jerk-free operation.

The column supports a maximum payload of 25Kg (55 lbs) it includes an air pressure gauge, locking brake and safety air pressure valve adjusted at maximum 187 psi. The air pressure inside the column can be set in manually and adjusted to suit the exact weight of the camera configuration.

The foldable and extensible dolly features a six-position **TRACK LOCK**, foot operated brake on each of the 100mm wheel and cable guards. Special track wheels, available as an option allow the use on standard tracks

The system includes a manual air pump.

## ■ specifications

Maximum pressure: 13.0 atm (187 psi)

Maximum capacity: 25 Kg (55 lbs)

Total weight: 14 Kg (31 lbs)

"on-shot" stroke: 40 cm (15,7")

Steering wheel diameter: 26 cm (10,2")

Minimum height: 74 cm (29")

Maximum height: 161 cm (63,3")

Wheels: 3 x 2 coupled

Wheel diameter: 100mm (3,9")

Doorway tracking width min.: 67 cm (26,3")

Doorway tracking width max.: 97 cm (38,1")