

Samsung Digital Presenter



SDP-950ST/DX



Compact
Professional Lens
Easier to Use







Lens...

Professional Lens



: The Brightest And Finest Picture Quality By 1/3" 850,000 Pixels PS(Progressive Scan) CCD




: An Exclusive 12X Powered Optical Zoom Lens(F3.2, f=6.3~75.6mm)



: The Fastest And Perfect Auto Focus / Depth of Field 250mm

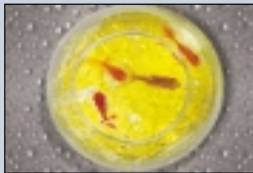

: Continuously Working Auto focus
: 15Frame Rate Per Second





Easier to Use....

: The Most Versatile PC And AV Interface (USB, RS-232, Twain, Win/Mac)



: Pull down Menu, Writing & Drawing on the Screen by PC Mouse (PS/2)



: Convenient Digital Function


- 90° / 180° / 270° / 360° Rotation (Zoom Available)
- Image Split & Shift
- 3X3 Screen Display
- 8 Frames Save
- 8 Functions Preset upto 4 Conditions
- Image Freeze
- Negative / Positive Image Conversion



90°







180°



270°

Connection...

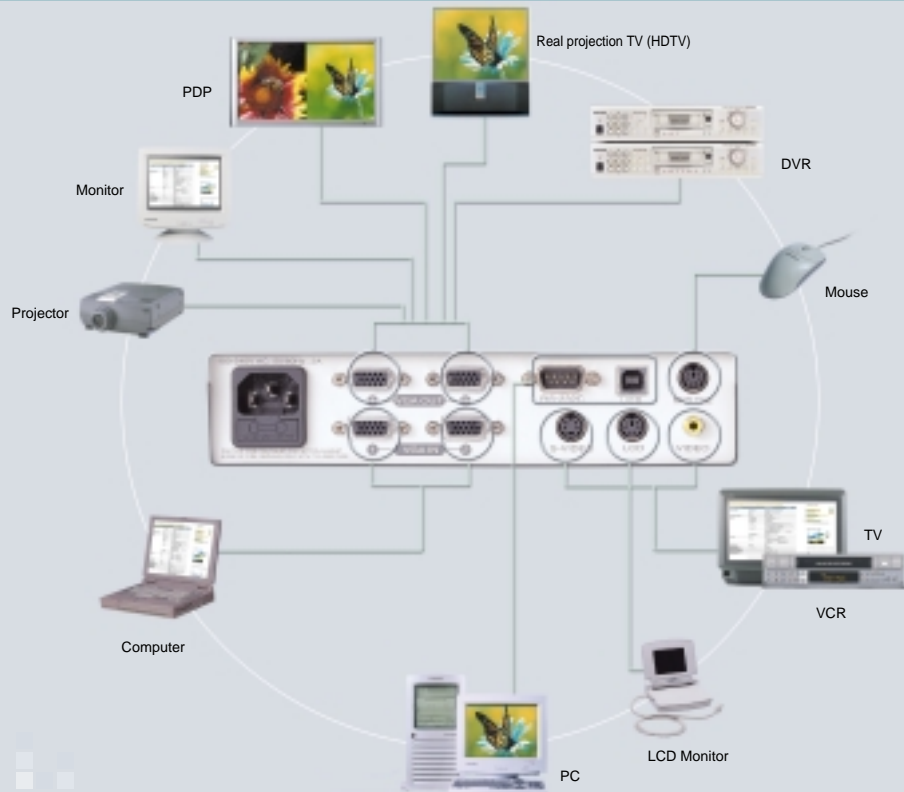

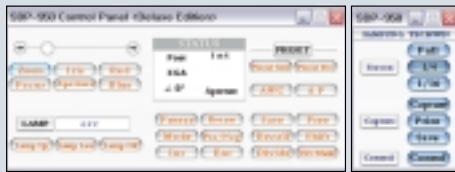

: Computer interface

The SDP-950 has built-in USB and RS-232C interface which allows the use of a remote control and connection with any Windows PC. These versatile tools enable the SDP-950 to talk to a PC and save and send images to a PC.



: LCD-5500 (option)

You can preview your presentation.



: BAG-950 (option)



Deluxe carrying bag



: SLB-950 (option)

Light Box (Power Adaptor)

Dimension

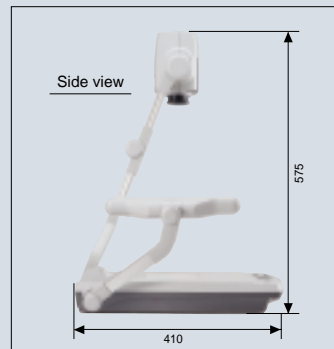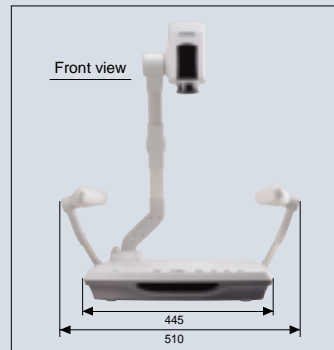

SPECIFICATION	DESCRIPTION	SDP-950ST	SDP-950DX	
OPTICAL SYSTEM	LENS, ZOOM	F3.2, f=6.3~75.6mm [12X POWERED OPTICAL ZOOM]		
	SHOOTING AREA	MAX: 300mm X 210mm, MIN: 32mm X 24mm		
	FOCUS	AUTO FOCUS / MANUAL FOCUS		
	IRIS	AUTO / MANUAL		
	ADAPTOR LENS	REMOVABLE		
VIDEO	PICK-UP DEVICE	1/3" 850,000 PIXELS [PSI(PROGRESSIVE SCAN)] CCD		
	TOTAL PIXELS	1,077(H) X 788(V)		
	EFFECTIVE PIXELS	1,024(H) X 768(V)		
	FRAME RATE	15 FRAMES/SEC		
	SYNC SYSTEM	INTERNAL SYNC.		
	RESOLUTION	VGA OUT - HORIZONTAL: 570TVL / VIDEO OUT - HORIZONTAL : 350TVL		
	S/N RATIO	48dB		
	VIDEO OUTPUT	C-VIDEO / S-VIDEO		
VGA OUTPUT	1,024 X 768 [XGA] RGB COLOR / 800 X 600 [SVGA] RGB COLOR / 640 X 480 [VGA] RGB COLOR			
WHITE BALANCE	AUTO / MANUAL			
PC INTERFACE	USB	BUILT-IN		
	RS-232C	BUILT-IN		
	APPLICATION SOFTWARE	WIN / MAC		
	WINDOWS SOFTWARE	TWIN DRIVER		
DIGITAL FUNCTIONS	GRAPHIC USER INTERFACE	PULL DOWN MENU, WRITING & DRAWING ON THE SCREEN BY PC MOUSE [PS/2]		
	IMAGE FREEZE	AVAILABLE		
	NEGATIVE/POSITIVE	SELECTABLE		
	IMAGE SAVE & RECALL	NOT AVAILABLE	8 FRAMES SAVE, 3X3 FRAMES MULTI-DISPLAY	
	IMAGE SPLIT AND SHIFT	NOT AVAILABLE	2 IMAGES [SAVE / LIVE]	
IMAGE ROTATION	NOT AVAILABLE	SWITCHABLE BY 90°		
PRESET SAVE	NOT AVAILABLE	UPTO 8 USER'S PRESET(ZOOM, FOCUS, IRIS, POSI/NEGA & etc)		
LIGHTING SYSTEMS	UPPER LAMP	SIDE ARM LAMPS		
	LOWER LAMP	BOTTOM LIGHT BOX		
TERMINALS	INPUT	VGA X 2		
		MOUSE X 1		
		VGA(15P DIN) X 2		
	OUTPUT	S-VIDEO X 1 / C-VIDEO X 1 [RCA]		
		USB X 1		
		RS-232C(9 PIN) X 1		
REMOTE CONTROLLER	SUPPLIED			
OPERATION TEMPERATURE	+5 °C ~ +35 °C			
OPERATION HUMIDITY	30% ~ 90%			
POWER SOURCE	AC 100V ~ 240V FREE VOLTAGE, 50/60Hz			
POWER CONSUMPTION	50W			
WEIGHT	5.5Kgs			
DIMENSION	510mm(W) X 575mm(H) X 410mm(D) [IN USE]			
OPTIONAL ACCESSORIES	LCD MONITOR, CARRYING BAG, LIGHT BOX			

www.samsungpresenter.com

Design and specifications are subject to change without notice.



TECHWIN

SAMSUNG TECHWIN CO., LTD
 145-3 Sangdaewon 1-Dong, Jungwon-Gu,
 Sungnam, Kyungki-Do, Korea 462-121
 TEL:82-31-740-8137~8141 FAX:82-31-740-8145

SAMSUNG OPTO-ELECTRONICS AMERICA, INC.
ELECTRONIC IMAGING DIV.
 40 Seaview Drive, Secaucus N.J. 07094, U.S.A
 TEL:201-902-0347 FAX:201-902-9342

SAMSUNG TECHWIN CO., LTD
REPRESENTATIVE OFFICE IN RUSSIA
 40/42, Kosmodamianskaya Na.,
 Moscow, 113035, Russia.
 TEL: 7 (095) 937-79-50 FAX: 7 (095) 937-48-51

駐中國業務代表處(深圳)
 中國深圳市福田區華強北路
 華聯發大廈5樓531室
 電話:(0755)3200110 3251953 3228969
 傳真:(0755)3249441 3252430

■ DISTRIBUTED BY

