

The TZ 32A unit is a 32x32 audio stereo matrix with balanced inputs, outputs.

It can work in single mode or combined with the TZ 32V video.


The TZ 32A can be controlled through the integrated keyboard, from computer with RS232 or RS485 interface and IR control.

Moreover it can be driven via link when connected to the TZ 32V video matrix .

L'unità TZ 32A è una matrice 32x32 audio stereo con ingressi e uscite bilanciate.


Può lavorare in modo singolo oppure abbinata alla matrice video TZ 32V.

La TZ 32A può essere comandata tramite la tastiera integrata, da computer con interfaccia seriale RS232 o RS485 e mediante telecomando ad infrarossi, oppure comandata via link, quando è collegata alla matrice video TZ 32V

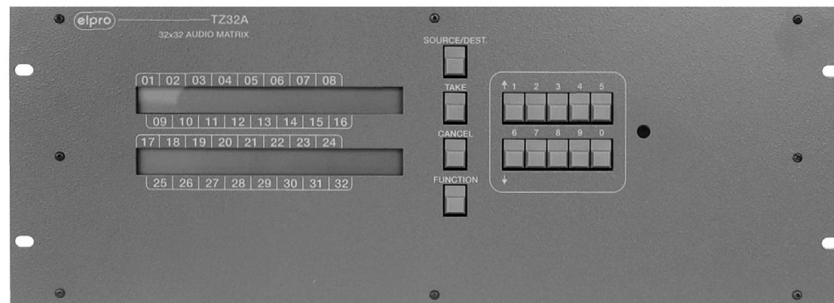

- Balanced audio
- Inputs / outputs with Phoenix Screwtype, removable
- Keypad programmable preview output
- 12 presets can be recalled
- Mapping capability
- IR remote control (optional)
- Linkable to TZ 32V

- Audio bilanciato
- Ingressi / uscite con morsetti Phoenix, removibili
- Uscita preview programmabile da tastiera
- 12 preset richiamabili
- Possibilità di mappatura
- Telecomando a infrarossi (opzionale)
- Collegabile alla TZ 32V

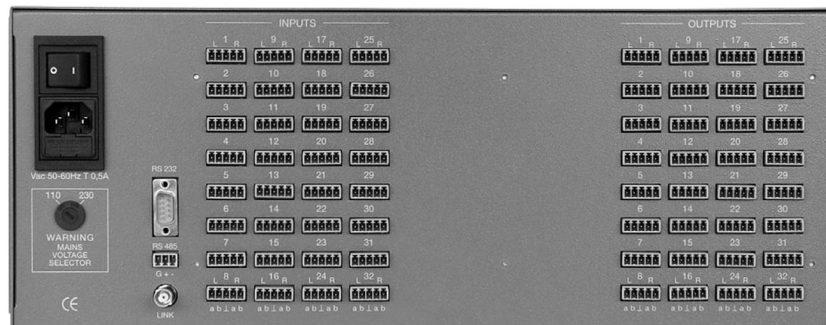

SPECIFICATIONS

Input type	:Differential, AC. coupled with Phoenix Screwtype, removable
Input impedance	:13 K Ω
Input level	:+12 dBm max
Output impedance	:600 Ω
Frequency response	:-1 dB from 3 Hz to 600 KHz
Distortion	:<0.02% from 20 Hz to 20 KHz at +6 dBm 10 K Ω
Crosstalk (Worst case)	:60 dB at 20 KHz
Hum & noise	:-80 dBm unweighted

Main input	:230 Vac / 115 Vac (selectable)
Power consumption	:10 VA
Size (WxDxH)	:483x130x176
Weight	:6 Kg

Operating temp.range	:0+45°
Safety	:according to EN60065
EMC	:according to EN55103-1 and-2

ELPRO Video Labs s.r.l.

Strada della Pronda, 45/B
10142 Torino-ITALY
Tel.+39 0117701583 – Fax +39 011703751

E-mail: info@elprovideolabs.com
[http:// www.elprovideolabs.com](http://www.elprovideolabs.com)

