

SONY®

Camera Control Unit

CCU-D50/D50P

Camera Adaptor

CA-D50



*Providing an extremely cost-effective,
end-to-end digital camera system solution*

CCU-D50¹ Camera Control Unit

- Interfaces with Sony DXC-D35 Series digital cameras² via its associated CA-D50 Camera Adaptor.
- The output of the CA-D50 Camera Adaptor is transferred to the CCU-D50 Camera Control Unit as a component digital SDI³ signal via a Sony CCZ-A 26-pin cable up to 75 m long. Using this digital SDI connection allows virtually degradation-free transmission from the camera to the CCU.
- The distance between the CA-D50 Camera Adaptor and CCU-D50 Camera Control Unit can be extended to a maximum 200 m by providing a separate low loss coaxial video cable to carry the SDI signal between the two units.
- Switchable mode to accept analog component/VBS signals from DVCAM™ camcorders equipped with a 26-pin interface. Maximum cable length from the camcorder to the CCU-D50 is 300 m⁴.
- Outputs analog composite and one of the following: component digital SDI, analog component (Y/R-Y/B-Y or RGB), or S-video⁵.
- Flexible intercom connectivity allows the interfacing of 2-wire or 4-wire systems to be selected.

- Green tally indication included for use in mid to large-scale camera operations.

^{*1} In the following text, 'CCU-D50' refers to both the CCU-D50 (NTSC model) and the CCU-D50P (PAL model).

^{*2} The DXC-D35 Series of digital cameras requires software upgrade to use the CCU-D50/D50P.

^{*3} Embedded audio is not supported.

^{*4} The distance between the camcorder and the CCU-D50 may vary depending on system requirements.


^{*5} Available output signals depend on the connected camera or camcorder.

CA-D50 Camera Adaptor

- Designed for use with the CCU-D50 Camera Control Unit.
- Dockable to Sony DXC cameras that employ the 76-pin digital connector.
- Interfaces with 26-pin equipped Sony portable VTRs.
- Interfaces with the BKP-L551 Battery Adaptor with the appropriate service part*.

* Please contact your nearest Sony office.

System Configuration

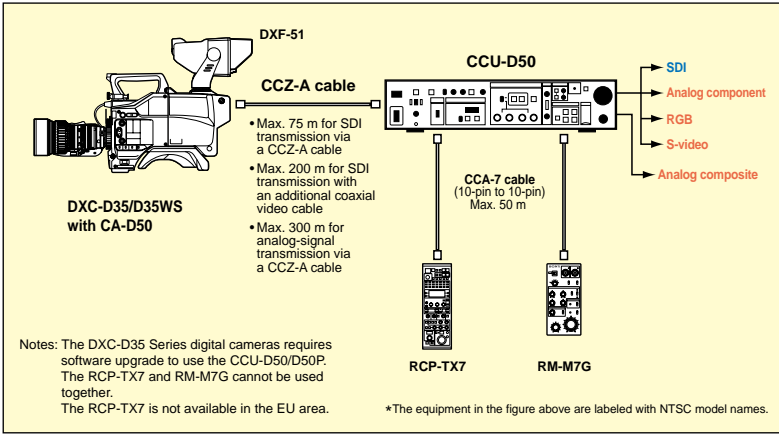

Peripheral Equipment

RCP-TX7 Remote Control Panel

- Provides full* camera control functions to cover extremely sophisticated operations.
- *When connecting a camera/CA-D50 to the CCU-D50.

RM-M7G Remote Control Unit

- Compact and lightweight handheld unit intended for basic camera control operations.

CCZ-A cables (26-pin to 26-pin)

- Six types of cable lengths available:

CCZ-A2; 2.0 m (6.6 feet)	CCZ-A5; 5.0 m (16.4 feet)
CCZ-A10; 10.0 m (32.8 feet)	CCZ-A25; 25.0 m (82.0 feet)
CCZ-A50; 50.0 m (164.0 feet)	CCZ-A100; 100.0 m (328.1 feet)

CCZZ-1E Extension Connector (26-pin to 26-pin)

- Extension connector for CCZ-A cable interconnection.

CCZZ-1B Bulk-head connector (26-pin to 26-pin)

- Wall mountable type connector for CCZ-A cable interconnection.

Specifications

CCU-D50/D50P

	CCU-D50	CCU-D50P
Input connectors		
GEN LOCK	BNC type, loop-through, VBS or BBS, 1.0 Vp-p, 75 Ω	
SDI	BNC type, 270 Mb/s, 0.8 Vp-p, 75 Ω	
RETURN VIDEO	BNC type, loop-through, 1.0 Vp-p, 75 Ω	
PROMPTER VIDEO	BNC type, loop-through, 1.0 Vp-p, 75 Ω	
Output connectors		
VBS (1, 2)	BNC type, VBS, 1.0 Vp-p, 75 Ω	
Y/R-Y/B-Y	BNC type, Y: 1.0 Vp-p, 75 Ω, R-Y/B-Y: 0.700 Vp-p, 75 Ω	BNC type, Y: 1.0 Vp-p, 75 Ω, R-Y/B-Y: 0.525 Vp-p, 75 Ω
Y/C	BNC type, Y: 1.0 Vp-p, 75 Ω, C: 0.286 Vp-p, 75 Ω	BNC type, Y: 1.0 Vp-p, 75 Ω, C: 0.3 Vp-p, 75 Ω
R/G/B	BNC type, 0.7 Vp-p, 75 Ω	
SYNC	BNC type, 0.3 Vp-p, 75 Ω	
SDI (1,2)	BNC type, 270 Mb/s, 0.8 Vp-p, 75 Ω	
S-VIDEO	DIN 4-pin, Y: 1.0 Vp-p, 75 Ω, C: 0.286 Vp-p, 75 Ω	
MONITOR	BNC type, VBS, 1.0 Vp-p, 75 Ω	
MIC	XLR 3-pin, 600 Ω	
Camera control input/output connectors		
CAMERA	Sony Z-type 26-pin	
INTERCOM/TALLY	D-sub 15-pin, 4W/2W selectable, R/G TALLY, contact	
REMOTE	10-pin	
General		
Power requirements	AC 120 V, 50/60 Hz	AC 200/240 V, 50/60 Hz
Power consumption	Approx. 1.7 A	Approx. 0.8 A
Operating temperature	+5 °C to +40 °C (+41 °F to +104 °F)	
Storage temperature	-20 °C to +55 °C (-4 °F to +131 °F)	
Dimensions	424 (W) x 88 (H) x 283 (D) mm (16 3/4 x 3 1/2 x 11 1/4 inches)	
Mass	6.3 kg (13 lb 14 oz)	
Supplied accessories	AC power cord (x 1), rack mount adaptor (x 2), rack mount screw (x 4), tally indication segment (x 1), operation manual (x 1)	

CA-D50

	CA-D50 Camera Adaptor
Input/Output connectors	
Camera interface	Pro 76-pin DIGITAL
CCU/VTR/CMA	Sony Z-type 26-pin
SDI OUT	BNC type, 270 Mb/s, 0.8 Vp-p, 75 Ω
GENLOCK/PROMPTER OUT	BNC type, 1.0 Vp-p, 75 Ω
EARPHONE	Mini jack
INTERCOM	Mini intercom jack
DC IN	XLR 4-pin, 10.5 to 17.0 V
General	
Power requirements	DC 12 V
Power consumption	Approx. 3.8 W
Operating temperature	-10 °C to +45 °C (+14 °F to +113 °F)
Storage temperature	-20 °C to +55 °C (-4 °F to +131 °F)
Dimensions	113 (W) x 183 (H) x 168 (D) mm (7 1/4 x 4 1/2 x 6 5/8 inches)
Mass	1.1 kg (2 lb 7 oz)
Supplied accessory	Operation manual (x 1)

Signals transferred to/output from the CCU-D50/D50P

Camera/Camcorder	Signals transferred to/output from the CCU
DXC-D35/D35P/D35WS/D35WSP	VBS and one of the following: SDI, Y/R-Y/B-Y, RGB, Y/C
DSR-370/370P	Y/R-Y/B-Y and VBS
DSR-570WS/570WSP	

CCU-D50/D50P Rear Panel



CA-D50 Rear



Distributed by