

COSMO1500

1500FT WIRELESS HDMI/SDI TRANSMISSION SYSTEM



1080P 60Hz
4:2:2



TALLY & INTERCOM



3G-SDI, HDMI INPUT AND OUTPUT



USB FIRMWARE UPGRADE



NO COMPRESSION NO DELAY

APPLICATION & FEATURES



- GUARANTEED DISTANCE: 1500FT, UP TO 1700FT
- TX: SDI IN&LOOP OUT, TALLY OUT, HDMI IN
- RX: SDI OUT&LOOP OUT, TALLY IN, HDMI OUT
- WIRELESS TALLY & WIRELESS INTERCOM
- VIDEO POINT TO POINT OR MULTIPOINT
- SUPPORT TIMECODE&TRIGGER
- TRUE FULL HD 1080P60; 4:2:2
- NO COMPRESSION, NO DELAY
- 5GHZ/ UHF ISM FREQUENCY BAND
- WORKING VOLTAGE: 7-36VDC
- AES-128 ENCRYPTED TRANSMISSION
- USB FIRMWARE UPGRADE

INTERFACE INTRODUCTION

TRANSMITTER:

- 2.4G 900MHZ RP-SMA FEMALE CONNECTOR
- LINK INDICATOR
- VIDEO INDICATOR
- 7-SEG LED FREQUENCY CHANNEL INDICATOR
- SELECTION BUTTON
- CONFIRM BUTTON
- MUTE/CALL INDICATOR
- VOLUME BUTTON/CALL
- XJ45 PORT FOR HEADSET
- TALLY OUT CONNECTOR(3.5MM SOCKET)
- STEREO IN(3.5MM SOCKET)



- 2.4G 900MHZ RP-SMA FEMALE CONNECTOR
- USB/BLUETOOTH CONNECTOR
- HDMI INPUT
- SDI LOOP OUT
- SDI INPUT
- DC POWER SWITCH
- DC INPUT, LEMO 4-PIN B SERIES CONNECTOR


RECEIVER:

- VIDEO INDICATOR
- LINK INDICATOR
- 7-SEG LED FREQUENCY CHANNEL INDICATOR
- RSSI
- SELECTION BUTTON
- CONFIRM BUTTON
- VOLUME BUTTON/CALL
- MUTE/CALL INDICATOR
- XJ45 PORT FOR HEADSET
- TALLY OUT CONNECTOR(3.5MM SOCKET)
- INTERCOM/TALLY LINEOUT



- 900MHZ RP-SMA FEMALE CONNECTOR
- USB/BLUETOOTH CONNECTOR
- HDMI OUTPUT
- SDI OUTPUT 1
- SDI OUTPUT 2
- DC POWER SWITCH
- DC INPUT, LEMO 4-PIN B SERIES CONNECTOR

SIZE OF PRODUCT

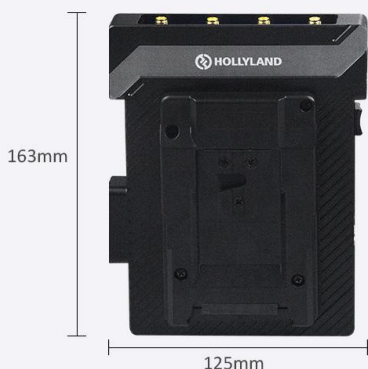

PACKING LIST

