

SHURE

MXC605

CONFERENCE UNIT

OVERVIEW

The MXC605 is a portable conference unit for use with the Microflex® Complete (MXC) digital conference system. This unit can be configured for use by a chairman, a delegate, an interpreter or as an ambient microphone. The unit features a speak button and function button, a lockable XLR* microphone connector, headphone jack with volume control, and channel selectors. The speak button enables the user to activate/deactivate the microphone directly or to submit a request to speak. An LED indicates whether the microphone is on (red) or in request to speak mode (green). The Chairman function button options include: Disabled/No function, Mute, Reply, All delegates off, Mute All, and Exclusive. The headphone jack allows the user to listen to the floor channel or interpretation channels through headphones. Interpreters will always listen to the floor channel in the headphone and can select the outgoing channel for interpretation. The unit features redundant loop connection to the DIS-CCU.



MXC605
Conference Unit

FEATURES

- Configurable for Chairman, Delegate, Interpreter or Ambient roles
- Speak and function buttons with LED indicators
- Channel selector supporting the floor channel and 4 interpretation channels
- 3.5 mm TRS headphone jack
- Lockable 3-pin female XLR microphone connector for GM4xx/GM59xx
- Connects to DIS-CCU central control unit using shielded CAT5e (or higher) F/UTP or U/FTP cabling with redundant loop option

SPECIFICATIONS (subject to change)



ELECTRICAL

Frequency response (headphone)	65 Hz-16 kHz
Frequency range (loudspeaker)	150 Hz-15 kHz
Power consumption	Typical 1.8 W, Maximum 2.6 W
Power maximum (loudspeaker)	2.1 W RMS
THD	< 0.1 %
Signal-to-noise-ratio	> 85 dBa
DSC-LAN	Two RJ45 female sockets (in/out)
Microphone	Compatible with GM4xx / GM59xx gooseneck microphones
Microphone Connector	3-pin XLR
Headphone	3.5 mm jack, female socket TRS

MECHANICAL

Installation	Portable or fixed tabletop mounting
Dimension (H x W x D)	71 x 128 x 146 mm (2.8 x 5.0 x 5.75 in.)
Weight	500 g (1.1 lbs.)
Color	Black
Operating temperature range	5° to 40° C

Data subject to change without notice in interest of product improvements.

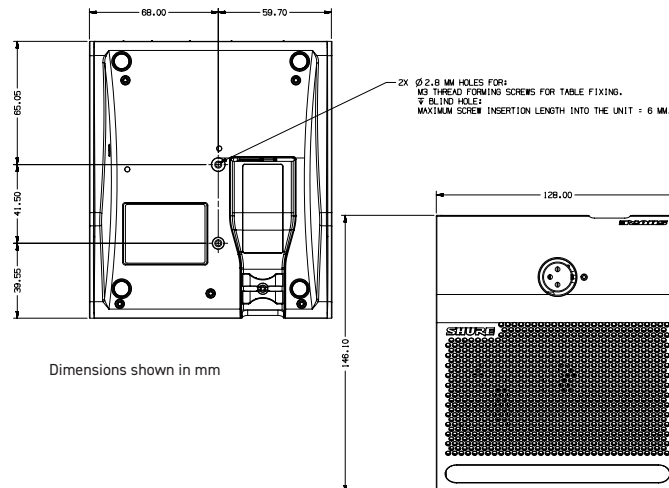

Dimensions shown in mm

AVAILABLE MODEL

MXC605	Portable conference unit w/ built-in loudspeaker and channel selection
---------------	--

INCLUDED ACCESSORY

Standard speak + function overlay

AVAILABLE ACCESSORIES

Button overlays provide a range of functions that enable the MXC605 conference units to suit the needs of different users.

SPEAK BUTTON OVERLAY	Features Speak button, volume control, channel selector Accessory MXC605-ACC-SPK includes 10	
SPEAK-FUNCTION BUTTON OVERLAY	Features Speak & Function buttons, volume control, channel selector 1 included with MXC605 conference unit Accessory MXC605-ACC-SPK+FUN includes 10	
INTERPRETER BUTTON OVERLAY	Features Speak & Function buttons, volume control, channel selector for interpreter Accessory MXC-ACC-INT includes 10	