

Panasonic
ideas for life

LQ-MD800
DVD Video Recorder

***A Professional DVD Video Recorder
for higher Video and Audio performance.***



DVD
RAM/R



Digital Video Recorder Using DVD-RAM/R Easy Operation and Fast Searching

This product complies to the medical electrical equipment standard with respect to electric shock, fire and mechanical hazards in accordance with IEC 60601-1, IEC60601-1-2 (EN 60601-1, EN 60601-1-2): (LQ-MD800P/LQ-MD800E)

This product is also classified by Underwriters Laboratories Inc. as to medical electrical equipment with respect to electric shock, fire and mechanical hazards only in accordance with UL 2602-1. Control number 76KA. (LQ-MD800P only)



High-quality images, High-quality audio recording

The Hybrid VBR MPEG2 encoder means High-quality images. Dolby Digital means High-quality audio. By recording in the XP or SP modes, you can record in Linear PCM (stereo) for even higher quality audio.

Maximum 8 hours recording

You can record a maximum of 8 hours on one double-sided 9.4 GB DVD-RAM disc. (4 hours maximum continuous recording)



Progressive output (NTSC only)

Connect to a Progressive signal compatible monitor for even higher quality images.

Remote control features

This unit comes standard with USB, RS-232C, PAUSE REMOTE for control. Remote control the unit from a PC.

NTSC/PAL switchable

Select the signal type (NTSC/PAL) to play or record either type.

Program search

Press the SEARCH button to bring up a list of programs. Then Select the program to start play.

Menu screens for simple operation

The menu screens offer easy-to-use icons for set-up and operation.

Program Editing [RAM]

You can divide and delete programs.

Create play list of just those scenes you need and play them in succession.

DVD-Video disc creation

By finalizing a DVD-R, you can create a disc that complies with DVD-Video standards and then play it on compatible DVD players.

Reliability

Industrial grade electronic parts

Key features

Direct recording into available space

You do not have to find a place to start as you do with tapes. There is also no fear of recording over previous recordings.

Send text data such as title

You can use the RS-232C/USB cables to send text information to use as program titles.

Auto-protect function

Recorded images can be protected automatically.

Repeat play, play list editing

Just decide a length of time to repeat, then specify the end point during play to play a section repeatedly. You can also edit together the images you need into a play list.

Play and edit on a PC

Use PC application to edit and create backup discs.


Small and light, power compatible between 100V and 240V

Compact so you have freedom in placement.

Discs for Superb Picture and Sound Quality,

Systems Applications

1. Image Filing System (RS-232C/USB-controlled)

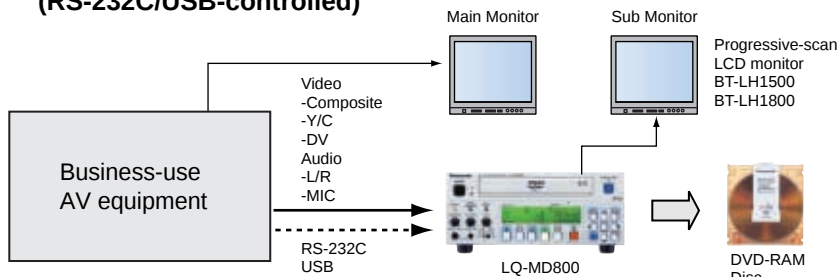

[1] Control of LQ-MD800 from business-use AV equipment

AV equipment with RS-232C control function can be used to control operations such as recording and playback, and playback modes like slow motion and fast forward.

[2] Direct recording onto free space on the disc, and prevention of accidental overwriting of previous data


Unlike videotape, the use of a disc eliminates the need to search for a blank space before you start recording. Also, you won't lose previously recorded data by accidentally recording over it.

[3] Recording of ID number and other information

A name and ID number can be recorded together with the title of the images via RS-232C/USB. A list can then be displayed for easy searching of recorded images.

[4] Audio input channels 1 and 2 for recording.

2. Image Filing System (Pause remote)

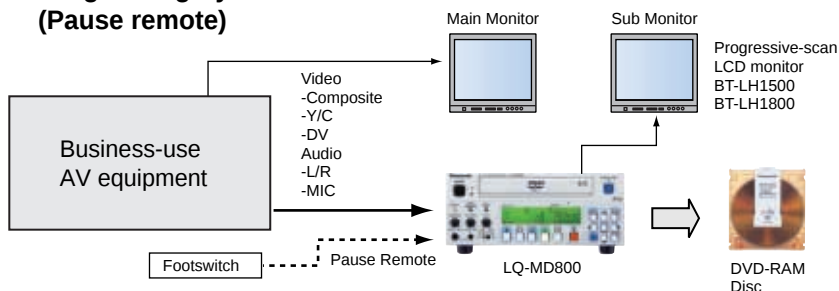

[1] Remote record pause

Recordings can be started and paused by using a footswitch or other device.


[2] Recording of ID number and other information

A name and ID number can be recorded together with the title of the images via RS-232C/USB. A list can then be displayed for easy searching of recorded images.

[3] Progressive-scan playback (NTSC only)

DVD ensures high-quality image playback.

3. Seminar Room/Viewing Station System

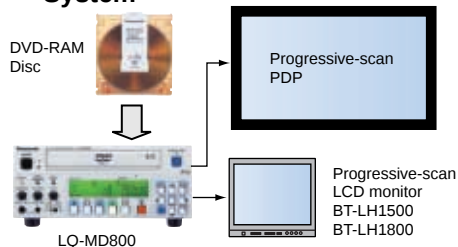

[1] Image search (List search based on recording date/time or ID)

Pressing the button displays a list of recorded images together with their recording date/time, thus allowing a quick and easy selection of the images to view. By registering a name for each image title, searching becomes even more convenient.

[2] Progressive-scan playback

(NTSC only)
DVD ensures high-quality image playback.

[3] Playlist playback

A playlist can be produced for the programmed playback of selected images. Repeat loops are easily selected.

4. Editing Room System




[1] Playback and editing of images using a PC

Recorded images can be edited and a backup disc can be produced by using DVD editing/authoring software.

Using a PC for Control and DVD Editing

Controlling operation with a PC (Control software must be customized.)

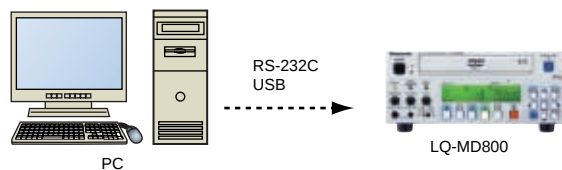

Using a PC for DVD editing




PC Control Example

In addition to basic VTR-like operation, the use of a disc allows the following convenient functions to be controlled from a PC.

Equipment Management	Acquisition of equipment status data: Operating mode, counter value, maintenance information
Disc management Operation	Data management: Disc title, program titles Space availability management: Confirmation of available recording space
Operation	Basic operations: Record, play, stop, special playback modes (frame-by-frame, slow, search) Search function: Direct search using counter value or program number GUI: Menu operation, etc.



DVD-RAM Disc



LM-AD240 9.4GB
Double Sided Removable



LM-AB120 4.7GB
Single Sided
Removable-cartridge



LM-AF120 4.7GB
Single Sided Non-cartridge

*In 9.4 GB double sided DVD-RAM, the capacity of record and playback is 4.7 GB for each side.

DVD-RAM disc features

High reliability

- Cartridge-type, easy handling
- Rewriting 100, 000 times
- DMS (Defect Management System) jumps over drops and scratches for recording (UDF2.0)

High capacity, removable


- Ideal for an image library
- Long term storage with no change
- Single-sided 4.7 GB/Double-sided 9.4 GB

SPECIFICATIONS

General	
Power supply :	AC 100-240 V, 50/60 Hz
Current consumption :	0.51-0.28 A
Recording System :	DVD Video Recording Standards (DVD-RAM) DVD Video Standards (DVD-R)
Recordable discs :	DVD-RAM 12cm (4.7 GB/9.4 GB) DVD-R 12cm (4.7 GB) for General Ver.2.0 DVD-R 12cm (4.7 GB) for General Ver.2.0 4x-SPEED DVD-R Revision 1.0
Recording Time :	Maximum 4 hours (with 4.7 GB disc) XP: Approx. 1 hour, SP: Approx. 2 hours, LP: Approx. 4 hours
Playable discs :	DVD-RAM 12cm (4.7 GB/9.4 GB) DVD-R 12cm (4.7 GB) for General Ver.2.0 DVD-R 12cm (4.7 GB) for General Ver.2.0 4x-SPEED DVD-R Revision 1.0
Operating Temperature :	41 °F-104 °F (5 °C-40 °C)
Operating Humidity :	10 %-80 % RH (no condensation)
Dimensions :	8-7/16 (W) x 4-1/32 (H) x 14-3/8 (D) inch 214 (W) x 102 (H) x 365 (D) mm
Weight :	10.14 lbs (4.6 kg)
Video	
Video System :	NTSC color signal, 525 Lines, 60 Fields PAL color signal, 625 Lines, 50 Fields
Recording system :	MPEG2 (Hybrid VBR)
Video In :	BNC x 1 1.0 Vp-p 75Ω, unbalanced S-Video In (4P) x 1 Y: 1.0 Vp-p 75Ω, unbalanced C: 0.286 Vp-p, burst level 75Ω, unbalanced (NTSC) C: 0.3 Vp-p, burst level 75Ω, unbalanced (PAL) DV-Input x 1 IEEE1394 Standard, 4pin (PAL/NTSC)
Video Out :	BNC x 2 1.0 Vp-p 75Ω, unbalanced S-Video In (4P) x 1 Y: 1.0 Vp-p 75Ω, unbalanced C: 0.286 Vp-p, burst level 75Ω, unbalanced (NTSC) C: 0.3 Vp-p, burst level 75Ω, unbalanced (PAL) Component video output (BNC) (NTSC 480P/480i) (PAL 576i) Y: 1.0 Vp-p 75Ω, unbalanced PB: 0.7 Vp-p 75Ω, unbalanced PR: 0.7 Vp-p 75Ω, unbalanced
Audio	
Recording System :	Dolby Digital 2ch, Linear PCM 2ch (XP/SP mode)
Audio In :	PHONO x 2, Reference Level, -10 dBV, 47kΩ unbalanced MIC In (mini jack) x 1 - 50 dBV, 3kΩ unbalanced
Audio Out :	PHONO x 2, Reference Level, -10 dBV, 600Ω unbalanced MONITOR Out (PHONO) x 1 -10 dBV, 600Ω unbalanced Headphones Out (Stereo mini jack) x 1 Variable Level, Maximum, - 28 dBV, 8Ω unbalanced
Remote	USB (Type-B connector) USB Ver.1.1 (cable length: max. 3 m) RS-232C (D-sub 9 pin) PAUSE REMOTE (Stereo mini jack)

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

Dimensions

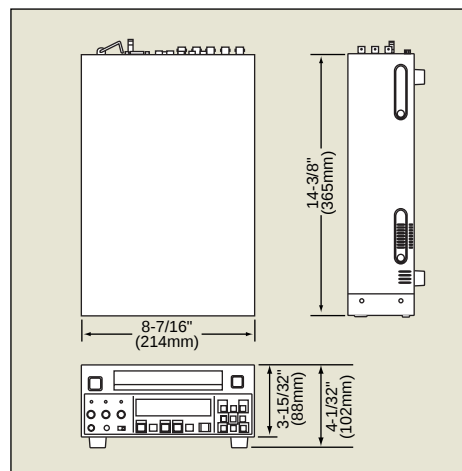

Panasonic

Matsushita Electric Industrial Co., Ltd.
Systems Business Group
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
Phone +81 6 6905 4650 Fax +81 6 6908 5969
www.panasonic.co.jp/bsd

Panasonic Digital Communications &
Security Company
Vision Systems Group
3 Panasonic Way
Secaucus, NJ 07094
877-733-3689
www.panasonic.com/vs

[Countries and Regions]

Argentina +54 1 308 1610
Australia +61 2 9887 6222
Austria +43 (0)1 610 80 773
Bahrain +973 252292
Belgium +32 (0)2 481 04 57
Bulgaria +359 2 946 0786
Brazil +55 11 3889 4035
Canada +1 905 624 5010
China +86 10 6515 8828
(Hong Kong +852 2313 0888)
Czech Republic +420 236 032 552/511
Denmark +45 43 20 08 57
Egypt +20 2 3938151
Finland, Latvia, Lithuania, Estonia* +358 (9)521 52 53
France +33 (0)1 49 46 43 59
Germany +49 (0)611 235 401
Greece +30 210 96 92 300
Hungary +36 (1)382 60 60
Indonesia +62 21 801 5666
+62 21 385 9449
Iran +98 21 2271463
Italy +39 02 67 88 449
Jordan +961 6 586 1914
Kazakhstan +7 3272 504 777

Korea +82 2 6670 5160
Kuwait +965 481 2123
Lebanon +961 1 216827
Malaysia +60 3 5549 5422
Mexico +52 5 488 1000
Montenegro, Serbia +41 (0)26 466 25 20
Netherlands +31 73 64 02 577
New Zealand +64 9 272 0100
Norway +47 67 91 78 00
Pakistan +92 5370320 21
Panama +507 229 2955
Peru +51 145 29470
Philippines +63 2 633 6162
Poland +48 (22)338 1100
Portugal +351 21 425 77 04
Puerto Rico +1 787 750 4300
Romania* +40 21 211 4855
Russia & CIS +7 095 258 42 06
Saudi Arabia +966 1 465 0709
Singapore +65 6270 0110
Slovak Republic +421 (0)2 52 92 14 23
Slovenia, Croatia, Bosnia, Macedonia* +44 (0)20 76 63 36 57
South Africa +27 11 313 1400

Spain +34 (93) 425 93 00
Sweden +46 (8) 680 26 41
Switzerland +41 (0)41 259 96 32
Taiwan +886 2 2725 9100
Thailand +66 2 731 8888
Turkey +90 216 578 3700
U.A.E. +971 4 282201
Ukraine +380 44 4903437
+380 44 4903438
[ext. 112]
+44 (0) 1344 70 69 20
U.K.



JQA-0443



SP-MD800PE1



40k403AM-1 Printed in Japan