

WHEN YOU INSTALL OUR NEW POWERED SPEAKERS, THE POSSIBILITIES BECOME ENDLESS.

We designed the new Azden APS 25 powered speaker system to be as versatile as possible: wireless or wired, expandable, wall or stand-mounted, and built for absolute reliability—so you could cover the broadest spectrum of audio installations.

EXCEPTIONAL SOUND

Incorporating a 20 watt amplifier, the APS 25 is a rugged, 2-way speaker with a 5.25 in. shielded woofer and a 1 in. wide-dispersion tweeter that produces clear detailed sound for all corporate, educational and commercial applications.



UHF, VHF, AND INFRARED WIRELESS

Only the APS 25 offers you the ability to include VHF, UHF, or Infrared wireless microphone modules. And, you can use either one or two modules, initially or later on. So you can order the speaker in any number of configurations and add to it in the future. Since we offer a choice of 30 VHF frequency modules, our 63 channel user-selectable UHF modules, or Infrared wireless, you can have multiple systems in one venue without interference.

MORE CONTROL, MORE INPUTS, MORE POSSIBILITIES

The APS 25 includes a Master Volume control and Tone control to reduce feedback. Individual level controls for each of the four inputs—two wireless, one wired mic level, and one line level—giving you more ways to configure your system. The speaker's variable line level output lets you daisy chain multiple speakers. The high gain mic input shorts automatically to reduce noise when no mic is plugged in.

FEATURES THAT MAKE LIFE EASIER


We've also included Auto On-Off circuitry triggered by any audio input signal for hands-off system startup; a high impact case for reliability, and dual-voltage (110/220V) switching to facilitate installation and use. The APS 25 can be used free standing, stand-mounted, or wall-mounted with the supplied U-mount bracket. For easier wall mounting, we've included a removable 90°-angle AC cable.

Take advantage of the APS 25's unlimited possibilities on your next install. To find out more, please click to azdencorp.com, call us at 516-328-7500, or write us at azdenus@azdencorp.com.



APS 25

Multi-Function / Multi-Purpose Powered Speaker System

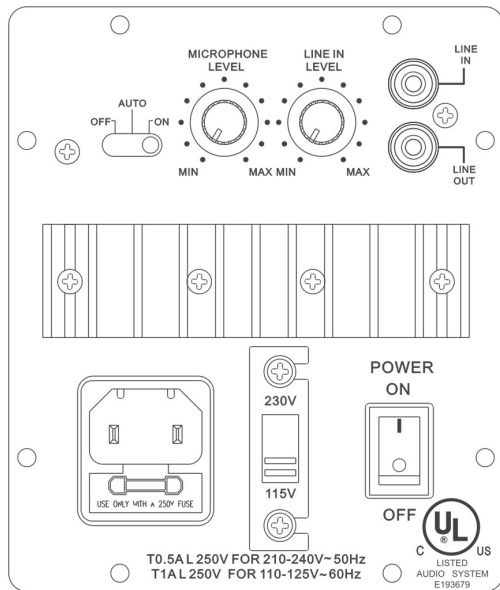

- High-impact injection-molded ABS case
- 4 inputs w/independent volume control
- Master Volume control
- Anti-feedback tone control
- 2 user-installable wireless module slots
- Signal-sensing auto-on circuit
- Table, stand or wall mountable
- Magnetically shield woofer
- Wide dispersion tweeter
- 115 / 220VAC user-switchable
- Two-year warranty

- SPECIFICATIONS -

Rated Power	20 watts continuous
Frequency Response	65Hz – 18kHz
Max SPL @ rated output	101dB @ 1 meter
Woofer	5.25" (133.35mm) high efficiency - magnetically shielded
Tweeter	1" (25mm) dome
Crossover	1 st order passive @ 8kHz
Tone Control	-6dB/octave sliding lowpass (3kHz to 8kHz)
Wireless inputs	2 user-installable receivers VHF (169-213MHz), UHF (794-806MHz) and/or Infrared
Wired inputs/output	
Mic	-81dBV (0.089mVRMS) for 1 watt 100K Ω unbalanced, 1/4" phone jack, variable
Line	-40dBV (10mVRMS) for 1 watt 10K Ω unbalanced, RCA jack, variable
Line-Out	+15dBV max - RCA jack
Weight	8.25 lb (3.74kg) approx. w/out receivers
Dimensions	12.4"H x 7.09"W x 5.6"D (315 x 180 x 142mm)
Compliance	UL, C-UL, and FCC approved
AC Power Requirements	User switchable: 110-125 / 210-240VAC - 50Hz / 60Hz
Included w/speaker	Removable wall-mount bracket, removable right-angle AC cord, 4 anti-skid pads



AZDEN Corporation, P.O. Box 10, 147 New Hyde Park Road, Franklin Square, NY 11010-0010
516.328.7500 [vox] • 516.328.7506 [fax] • azdenUS@azdencorp.com [email] • www.azdencorp.com [on the web]

- Specifications subject to change without notice -