

DA 224

DUAL 1x4 BAL. AUDIO DISTR. AMPLIFIER

DA 224 is a distributor /amplifier for audio signals capable to distribute the incoming stereo signal towards 4 destinations.

May be employed as amplifier for small audio signals.


DA 224 è un distributore/amplificatore per segnali audio capace di distribuire il segnale stereo entrante verso 4 destinazioni.

Può essere impiegato come amplificatore per segnali audio di basso livello.



- Differential inputs
- Outputs electronically balanced
- Fine level adjustment ± 6 dB
- Gain of 0,+10,+24 dB dip-switches selectable
- Output impedance of 600 Ω

- Ingressi differenziali
- Uscite bilanciate elettronicamente
- Regolazione fine di livello ± 6 dB
- Guadagno 0,+10,+24 dB selezionabile da dip-switches
- Impedenza di uscita a 600 Ω

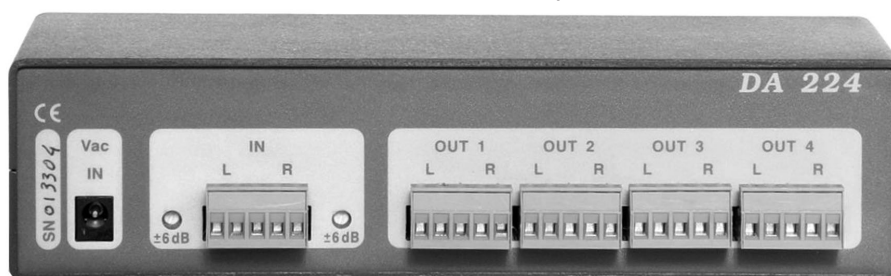

SPECIFICATIONS

Specifications (each section)

Input	:Differential, DC coupled (Internal H.P. filter)
Input impedance	:44 K Ω
Input level	:+19 dBm Max
CMRR	:80 dB at 50 Hz 72 dB at 16 KHz
Output gain	:0 dB ± 6 dB rear panel adjustable
Fixed gain	:0,+10,+24 dB dip-switches selectable
Outputs	:4, electronically balanced
Frequency response	:-0.5 dB from 7 Hz to 90 KHz -3 dB at 150 KHz at +20 dB gain
Harmonic distortion	:<0.05 % from 20 Hz to 20 KHz at 19 dBm
Hum & noise	:-88 dB unweighted
Crosstalk (two sections)	:50 dB at 16 KHz

Main input (with AC adapter ADM 001)	:230 Vac 50 Hz
Power consumption	:5 VA
Size (WxDxH)	:220 x 100 x 55 mm
Weight	:0.6 Kg
Operating temp. range	:0 \div 45°C
Safety	:according to EN 60065
EMC	:according to EN 55103-1 and EN 55103-2

ELPRO Video Labs s.r.l.

Strada della Pronda, 45/B
10142 Torino-ITALY
Tel.+39 0117701583 – Fax +39 011703751

E-mail: info@elprovideolabs.com
[http:// www.elprovideolabs.com](http://www.elprovideolabs.com)

